


## TRAVERSE 6" ROUND T24 3000K 90CRI


14230S - 15

[www.visualcomfort.com](http://www.visualcomfort.com)

## General Product Information

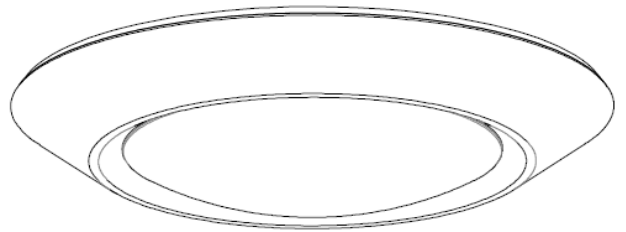

## Suggested/Required Tools

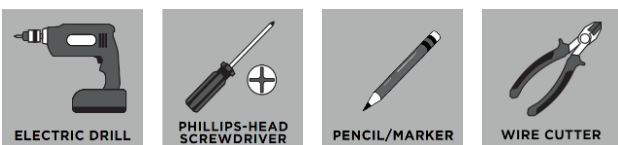

## Safety Information

## CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

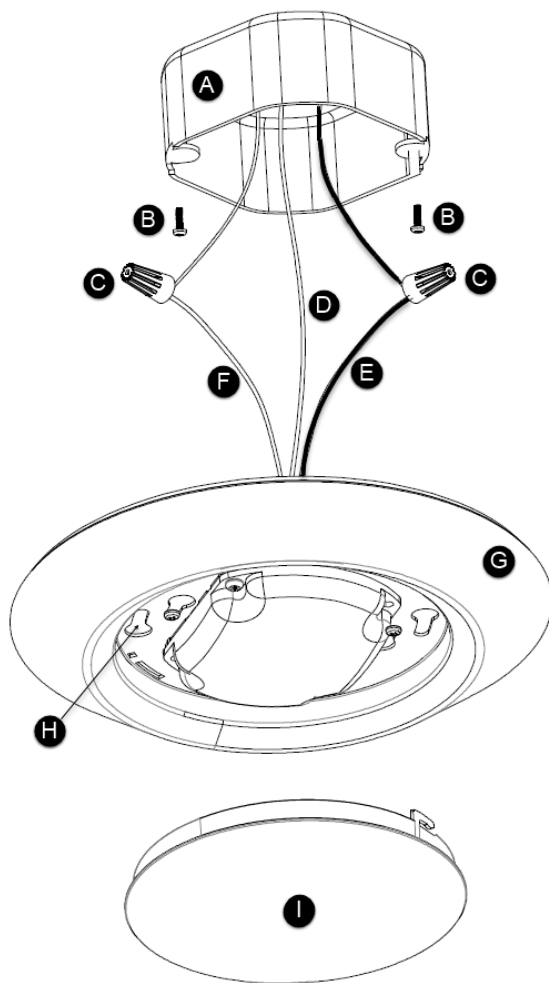

## FIXTURE PARTS

- A. Junction box
- B. Mounting Screws
- C. Wire Nuts
- D. Ground Wire
- E. Hot Fixture Wire
- F. Neutral Wire
- G. Fixture
- H. Key Hole Slots
- I. Lens

**Please Note:** This fixture can be ceiling or wall mounted.

## INSTRUCTIONS

### I. Preparing the Fixture

1. Remove the lens from the fixture by twisting it counterclockwise.
2. Install junction box screws into the junction box, while leaving enough length to install the fixture using the keyhole slots.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

### III. Installing the Fixture

1. Align the keyhole slots on the fixture with the junction box screws, twist the fixture clockwise, and tighten down on the screws.
2. Reinstall the lens by screwing it clockwise onto the fixture.