

FROM THE LEADER IN  
INDOOR AIR QUALITY

**BROAN**  
**NuTone**  
BETTER AIR. BETTER LIFE.



# Keep your promises. Lo-Profile, 50-80-100 CFM with continuous run that lives up to the claim.

Exclusive selectable  
50-80-100 CFM plus  
continuous run



Flexible wall or  
ceiling mount

## THE ONE AND ONLY

Lo-Profile solution  
in the market that offers  
50-80-100 selectable CFM +  
continuous run

## EXCLUSIVE TrueCFM™

Even with complicated  
ducting, the installed fan will  
not lose CFM performance,  
unlike the competition<sup>1</sup>



# Lo-Profile. The only solution in the market that offers 50-80-100 selectable CFM + continuous run



## General Fan and Fan/Light Features (LP510R, LP510RSL)


- Selectable speeds of 50-80-100 CFM for right-sized ventilation in rooms up to 90 sq. ft.
- Continuous Run Mode maintains airflow to reduce mold/mildew risk
- ENERGY STAR® & ASHRAE 62.2 Certified
- Quiet performance at 0.4/0.9/1.2 Sones—enough sound to know it's on
- Adjustable low CFM setting allows precise adjustment to prevent over-ventilating and maximize energy efficiency
- Adjustable time delay—fan runs at high speed before returning to a continuous lower speed; factory-set, 20-minute time delay
- ETL\* listed for use over bathtubs and showers when connected to GFCI protected branch circuit (ceiling install only)
- 4" oval duct connection enables ceiling or wall mounting
- Optional 4" oval to 3" round duct adapter (S1110515) sold separately

## Additional Fan/Light Features

- Bright 4000K energy efficient LED lighting to help illuminate your room
- Built-in humidity sensor responds automatically to rapid increases in humidity and adjusts fan speed to high

\*Intertek Testing Services, formerly Edis-on Testing Laboratories

**TrueCFM™** technology maintains CFM performance even with complicated ducting

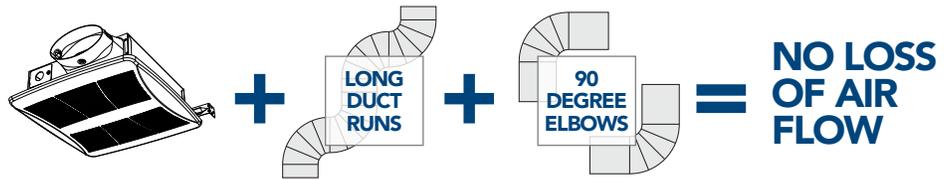


	Current Broan	New Broan	Panasonic <sup>1</sup>	Panasonic <sup>1</sup>	Panasonic <sup>1</sup>
Fan Model	LP80	LP510R	FV-0510VS1	FV-0810VSS1	FV-0510VSC1
Fan/Light Model	—	LP510RSL	FV-0510VSL1	FV-0810VSSL1	FV-0510VSSL1
Selectable CFM	✗	✓	✓	✓	✓
CFM	80	50-80-100	50-80-100	80-100	50-80-100
Sones	1.0	0.4/0.9/1.2	0.3/0.4/0.9	0.4/0.9	0.3/0.4/0.9
Humidity Sensor	✗	✓**	✗	✗	✓
Continuous Run	✗	✓	✗	✓	✗
Duct Size	4"	4"	4"	4"	4"
ENERGY STAR®	✓	✓	✓	✓	✓
Housing LxWxH	10.5" x 11.375" x 4"	10.25" x 10.25" x 3.375"	→		

ENERGY STAR® fans use 70% less energy, on average, than standard models and may qualify for local utility rebates.

\*\*Only the LP510RSL has a humidity sensor.



Broan LP510R & LP510RSL fans maintain CFM beyond 0.4" static pressure.

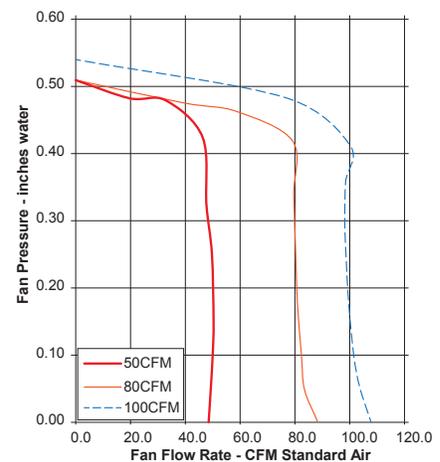

BROAN-NUTONE.COM | 800-558-1711 | 926 WEST STATE STREET, HARTFORD, WISCONSIN 53027

FROM THE LEADER IN INDOOR AIR QUALITY