



Condensate Removal Tank Pump Product Specifications

Product Features

- Vapor guard technology minimizes the ingress of moisture into the electronics enclosure
- IP24 splash proof—superior fan-assisted cooling system to the motor allows for semi-enclosed casing
- Suitable for applications that produce acidic condensate with pH > 2.2
- Float-activated high-level safety switch can be wired to sound an alarm or shut down the HVAC equipment to prevent overflow (PSCP315 excluded)
- Patented impeller configuration
- Built-in bubble level, ensures easy installation every time
- Compact design that doesn't compromise on reservoir capacity
- Single-screw, quick-release reservoir can be easily removed for routine maintenance while the pump remains fixed in place
- Unique trap and filter minimizes biofilm build-up in the main section of the reservoir (1/8" lip catches debris before water enters the reservoir)
- Maximum working temperature of 140°F with short temperature excursions to 185°F
- Max flow rate: 135 US gph (115V, 60Hz at 0ft head)
- Max recommended head: 21ft
- Tank capacity: 0.45 US Gal

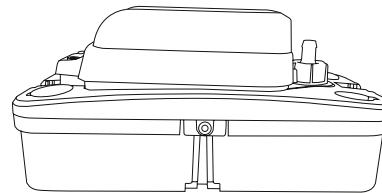

11-7/32" (285mm)



5-21/32" (144mm)




5-9/32"
(135mm)

Specifications

Model	Listings	HP	Volts	Hz	Amps	Running Watts	Gallons Per Hour at Height				Shutoff	Tank Capacity (US Gal)	Weight (lbs)
							1'	5'	9'	15'			
PSCP315	CSA	1/35	115	60	1.6	95	60	42	28	5	16'	0.45	4.10
PSCP315WS	CSA	1/35	115	60	1.6	95	60	42	28	5	16'	0.45	4.10
PSCP315WS20T*	CSA	1/35	115	60	1.6	95	60	42	28	5	16'	0.45	4.10
PSCP320WS	CSA	1/35	115	60	1.6	95	130	105	80	45	21'	0.45	4.10
PSCP320WS20T*	CSA	1/35	115	60	1.6	95	130	105	80	45	21'	0.45	4.10
PSCP320WS230	CSA	1/40	230	60	0.7	80	95	80	60	20	17'	0.45	4.10

* Includes 20ft of 3/8" ID vinyl tube

Performance

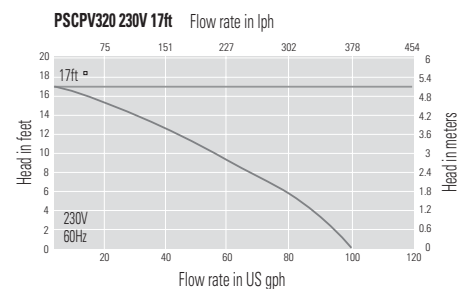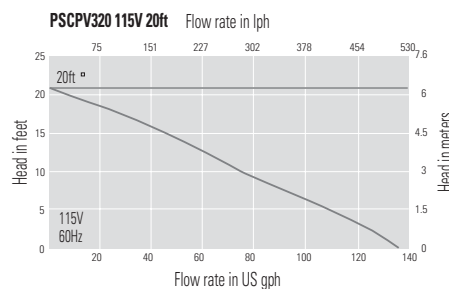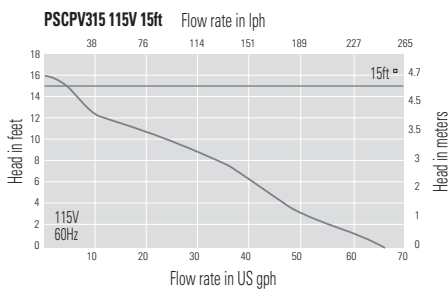

Warranty

This PROSELECT product carries a 1-year limited warranty.

