

CFG

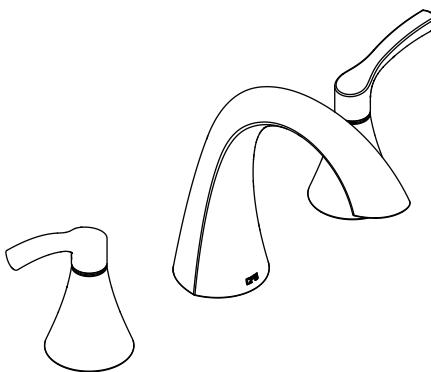
Ash™



NSF



Certified by IAPMO R&amp;T

Models:  
58912 series**Two Handle Widespread Lavatory With Waste****DESCRIPTION**

- Metal construction with chrome finish
- 1/2" IPS shanks
- Designed to be installed on 8" to 16" centers
- Includes 50/50 pop-up waste assembly
- Six (6) individual boxes per master carton

**OPERATION**

- Lever-style handle
- Hot side: Turn counterclockwise to open (clockwise to close)
- Cold side: Turn clockwise to open (counterclockwise to close)
- Will operate with less than 5 lbs. of torque
- No grasping motion required to operate the faucet handle
- Features red/blue hot/cold temperature indicators

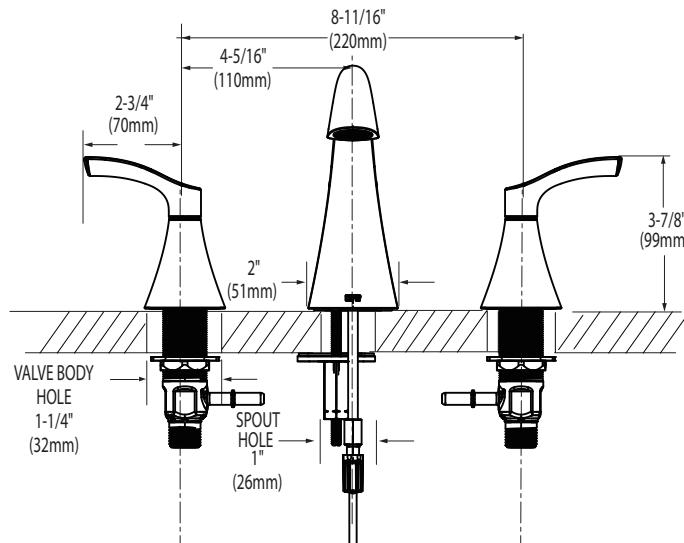
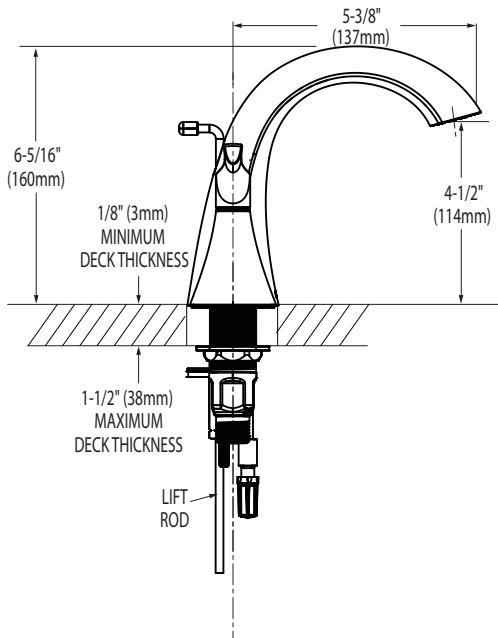
**FLOW**

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings

° 1.2 gpm max (4.5L/min) at 60 psi

**CARTRIDGE**

- Ceramic disc technology
- Non-metallic, non-ferrous, and brass materials
- Single body construction for easy replacement

**CRITICAL DIMENSIONS**  
(DO NOT SCALE)CLEVELAND FAUCET GROUP • 25300 AL MOEN DRIVE • NORTH OLMSTED, OHIO 44070 • (888) 450-5522 • [www.cfgonline.com](http://www.cfgonline.com)