



**Precision Plumbing Products**

*"Specify with Confidence - Install with Pride"*

## PRIME-TIME ELECTRONIC TRAP PRIMING ASSEMBLY SURFACE MOUNT

www.pppinc.net

It's PRIME-TIME to meet your floor drain trap priming needs. This unique trap priming assembly is available in 4 to 30 opening configurations and all the contractor needs to do is simply supply the potable water and power, Precision supplies the rest...

**"... Automatically maintains  
a constant water seal in floor  
drain traps."**

### Features:

ATMOSPHERIC VACUUM BREAKER  
PRE-SET 24 HOUR CLOCK  
MANUAL OVER RIDE SWITCH/TEST BUTTON  
120v/220v SOLENOID VALVE  
120v/220v 3/WIRE CONNECTION  
3/4" FNPT CONNECTION  
CALIBRATED MANIFOLD FOR EQUAL  
WATER DISTRIBUTION  
5/8" OR 1/2" OUTLET COMPRESSION FITTINGS

#### PART NUMBERS:

PTS-4, PTS-6, PTS-8, PTS-10, PTS-12  
PTS-1320, PTS-2130.

PTS-4 4 OPENING MANIFOLD  
- THRU -

PTS-2130 30 OPENING MANIFOLD



SURFACE MOUNT CABINET

The PRIME-TIME PRIMING ASSEMBLY will supply a minimum of 2 oz. of potable water at 20 P.S.I.G. at a preset factory setting of 10 seconds every 24 hours. The entire unit is pre-assembled in a steel cabinet ready to be either surface or flush wall mounted. The Priming assembly must be mounted above the finished floor.

PATENT NO. 5,253,670



## SURFACE MOUNT CABINET

**METAL CABINET:**

12" x 12" x 4" NEMA-1 with cover plate.

**INLET:**

3/4" inch NPT female. ANSI/ASME BI.20.1.

**OUTLET:**

5/8" or 1/2" inch compression fitting. SAEJ512.

**MANIFOLD:**

3/4" Type "L" copper tubing. ASTM B88.

**SOLDERED JOINTS:**


95-5 lead free containing lead not in excess of 0.2%.

**ELECTRICAL COMPONENTS:**

Circuit Breaker, Manual Over Ride Switch/Test Button, Timer, Solenoid Valve marked as UL listed.

**BACKFLOW PREVENTION:**

Anti-Siphon atmospheric vacuum breaker meets Los Angeles code, IAPMO, New York Board of Standards, ASSE 1001 and CSA.

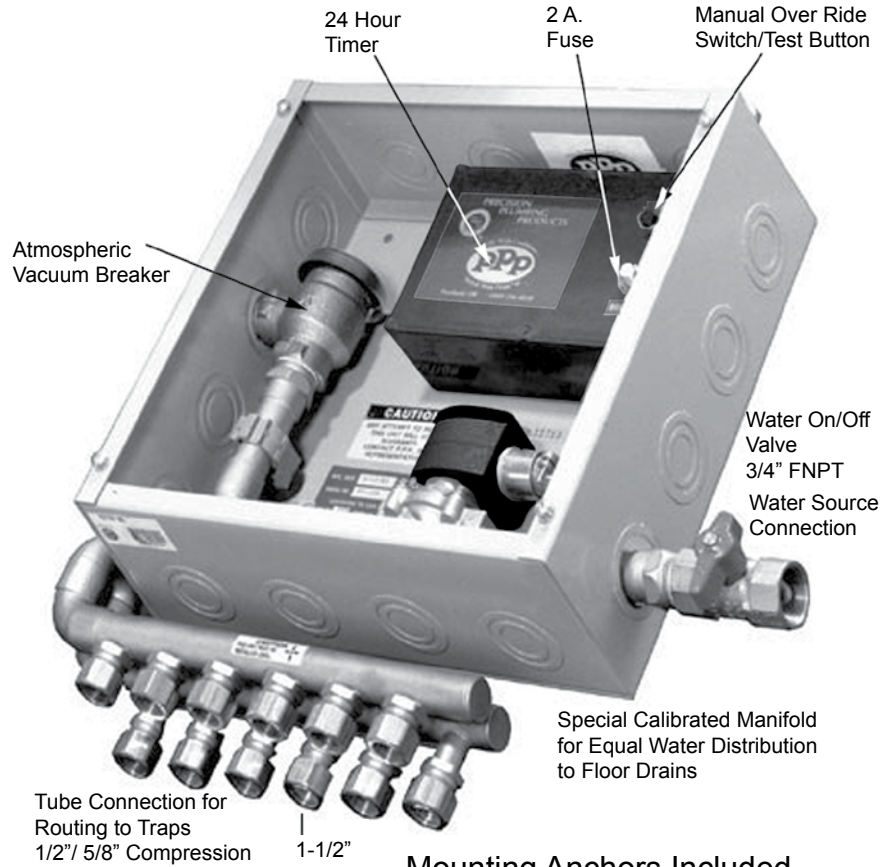

MODEL # PTS- \_\_\_\_\_  
 PTS-1320 - # of Drains Served: \_\_\_\_\_  
 PTS-2130 - # of Drains Served: \_\_\_\_\_

Mounting Anchors Included.

**PLEASE NOTE:**  
 UNIT MUST BE INSTALLED PLUMB.  
 MUST BE INSTALLED WITH ACCESS.

**PROJECT SUBMITTAL**

Project: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Date Submitted: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_

<b>COMPRESSION FITTINGS:</b> (CHECK ONLY ONE)	
<input type="checkbox"/>	1/2" COMP. FOR 3/8" ID COPPER LINE
<input type="checkbox"/>	5/8" COMP. FOR 1/2" ID COPPER LINE (This line is the floor drain trap make-up water line.)

<b>VOLTAGE:</b>	
<input type="checkbox"/>	120 Volt 60 Hz.
<input type="checkbox"/>	240 Volt 60 Hz.



**Precision Plumbing Products**  
 Division of JL Industries, Inc.  
 Airport Business Center  
 6807 NE 79th Court, Suite E  
 Portland, Oregon 97218  
 T (503) 256-4010  
 F (503) 253-8165  
 www.pppinc.net