

ARN4001


ASSEMBLY & INSTALLATION GUIDE

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

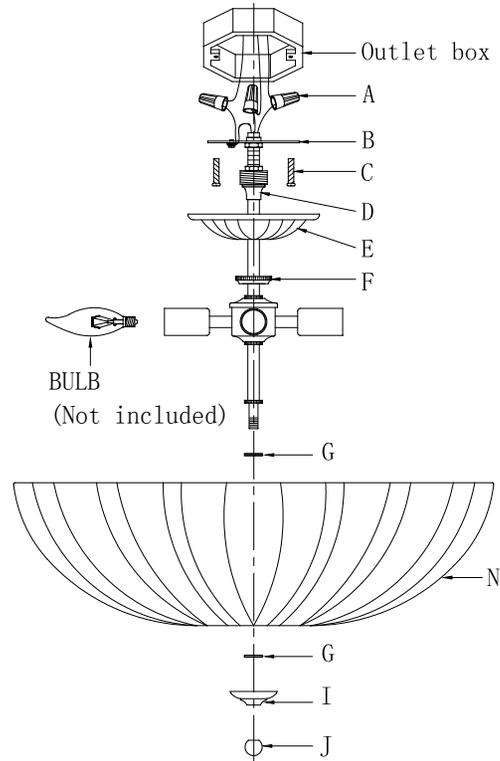

1. Install the crossbar (B) with ceiling loop (D) to outlet box by using mounting screws (C) provided.
2. Put canopy (E) to ceiling loop (D), and secure with lock collar (F).
3. Strip the insulation back on the two power supply wires about 5/8".
4. Twist the power supply and ground wires together and push through the center hole in the ceiling loop.
5. Loosen the lock collar (F) and let the canopy (E) slip down the fixture carefully.
6. Connect the Ground (bare) wire with the ground (usually bare) wire from your ceiling box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of outlet box.
7. IT IS IMPERATIVE THAT THE J-BOX IN YOUR HOME BE PROPERLY GROUNDED.
8. Connect the Neutral wire with the Neutral (usually white) wire from your ceiling box using wire nut (A).
9. Connect the Hot (smooth edge, markings, or black) wire with the Hot (usually black) wire from your outlet box using wire nut (A). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED. Tuck these wire connections neatly into outlet box.
10. Put canopy (E) to ceiling loop, and secure with lock collar (F).
11. Install the light bulbs (not included) into sockets.
12. Place plastic washer (G) then glass shade (N) on the center pipe. Place another plastic washer (G) and secure with screw finial (I) & (J).
13. Installation is complete, turn on power at fuse or circuit breaker.