


# 89xx-5CCT Series

120V-60Hz

Catalog #:		Type
Project:		Date
Prepared by:		

## 5CCT Selectable Under Cabinet Light

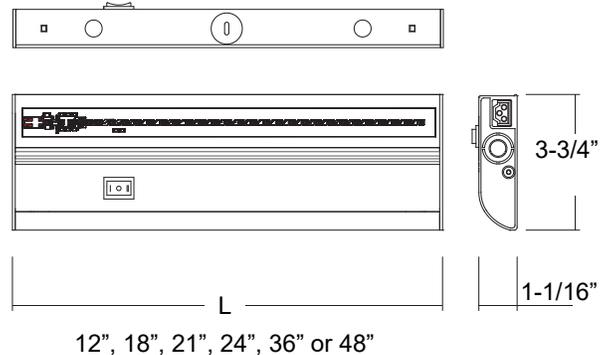

5CCT Selectable Under Cabinet Light

### DESCRIPTION

This series offers five color temperature options in one product which adds a touch of warmth and elegance to any cabinet/counter top application. Low-profile, easy installation, energy efficient and maintenance free.

### DESIGN FEATURES

#### Construction

- Aluminum housing with Ribbed Acrylic Curved Lens
- Linkable design for hardwire and plug-in

#### Electrical

- 120V-60Hz
- Dimmable TRIAC, 10-100%
- 50,000 hour projected life
- CCT Selectable: 27K, 3K, 35K, 4K, 5K
- 90 CRI

#### Installation

- Hinged wiring trough for easy access to wires
- Fast Hard-wiring with snap-in connector
- Each end-cap has one 3/4" knockout and capped linkable socket
- 8967: (1) 1/2" knockout located on the back side of housing
- 8968-72: (2) 1/2" knockouts located on the back side of housing

#### Finish

- Finish: white (WH)

#### Available Accessories

- 6" Connector cord: 897CN-6
- 12" Connector cord: 897CN-12
- 24" Power cord: 897PC-24
- End-to-end connector: 897CN
- Lens Replacement: 89xxL

#### Listing

- cCSAus Listed for damp location
- Energy Star Listed
- CEC JA8 Compliant
- LED Light Source: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

#### ORDERING GUIDE

Example: 8967WH-5CCT

Model #	Finish	CCT
8967: 12" 8968: 18" 8969: 21" 8970: 24" 8971: 36" 8972: 48"	WH : White	-5CCT : 27K, 3K, 35K, 4K, 5K

See 8966-2734 Spec Sheet for 9" 3CCT Selectable unit



LED Light Source

Other Components

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

5/19/23 R3



RPLIGHTING · FANS

# 89xx-5CCT Series

120V-60Hz

## Specification & Ordering

Model #	Size ( L x D x H )	Lumens	Watts	CRI
8967-5CCT	12" x 3-3/4" x 1-1/16"	Source 400 lms, Delivered 319 lms	4.5W	90
8968-5CCT	18" x 3-3/4" x 1-1/16"	Source 660 lms, Delivered 524 lms	6.8W	
8969-5CCT	21" x 3-3/4" x 1-1/16"	Source 740 lms, Delivered 590 lms	7.9W	
8970-5CCT	24" x 3-3/4" x 1-1/16"	Source 895 lms, Delivered 710 lms	9.1W	
8971-5CCT	36" x 3-3/4" x 1-1/16"	Source 1270 lms, Delivered 1008 lms	12.7W	
8972-5CCT	48" x 3-3/4" x 1-1/16"	Source 1735 lms, Delivered 1380 lms	17W	

See 8966-2734 Spec Sheet for 9" 3CCT Selectable unit.

5CCT Selectable Under Cabinet Light

