
# WaterMaster®4.5CD350 Fire Hydrant 6" MJ Shoe





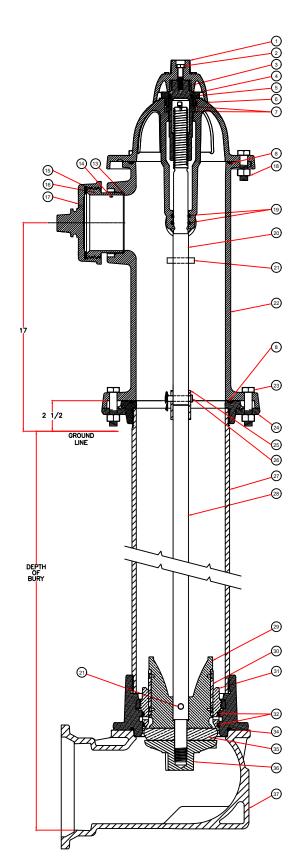

#### **Product**

WaterMaster® 4.5CD350 Fire Hydrant

### **Design Features**

- 1. RATED WORKING PRESSURE = 350 PSI.
- 2. MEETS ANSI/AWWA C502.
- 3. UL APPROVED.

#### Components

CAT NO.	PARTS LIST	MATERIAL
1	DUST CAP W/PENT	D.I.
2	DUST CAP BOLT	STN. STL.
3	OPERATING NUT	BRONZE
4	HOLD DOWN NUT	BRONZE
5	WEATHER SEAL "O" RING	BUNA-N
6	TOP BONNET	D.I.
7	THRUST WASHER	DELRIN
8	OUAD RINGS®	BUNA-N
9	HOSE NOZZLE "O" RING **	BUNA-N
10	HOSE NOZZLE **	BRONZE
11	HOSE NOZZLE GASKET **	RUBBER
12	HOSE NOZZLE CAPS **	C.I.
13	PUMPER NOZZLE "O" RING	BUNA-N
14	PIPE PLUG 1/4 NPTF SS HX	STN. STL.
15	PUMPER NOZZLE GASKET	RUBBER
16	PUMPER NOZZLE	BRONZE
17	PUMPER NOZZLE CAP	C.I.
18	TOP BONNET BOLTS & NUTS	ZINC PL. GR. 8
19	RESERVOIR "O" RING	BUNA-N
20	HIGH PRESSURE OPERATING STEM TOP 24 1/4"	STEEL W/BRASS SLEEVE
21	DRIVE-LOC PIN	STN. STL
22	NOZZLE STAN DPIPE	D.I.
23	SAFETY FLG. BOLTS & NUTS	ZINC PL. GR. 8
24	SWIVEL FLANGES (FRANGIBLE)	C.I.
25	HIGH PRESSURE STEM COUPLING (FRANGIBLE)	E-COATED STL.
26	HIGH PRESSURE COUPLING PIN & RING COTTER	STN. STL.
27	STANDPIPE LOWER SECTION	D.I. W/BRONZE INSERT
28	HIGH PRESSURE OPERATING STEM LOWER	STEEL
29	HIGH PRESSURE DRIP SHUTOFF	BRONZE
30	INSERTS	HDPE
31	VALVE SEAT	BRONZE
32	VALVE SEAT "O" RING	BUNA-N
33	BRASS DRAIN HOLE BUSHING **	BRASS
34	INLET FLANGE "O" RING	BUNA-N
35	SEATING VALVE RUBBER	RUBBER
36	VALVE WASHER	D.I./EPOXY
37	BOTTOMINLET	D.I./EPOXY
38	INLET FLG. BOLTS & NUTS **	STN. STL. 18-8
39	CHAINS **	ZN. PL. STL.
40	SET SCREW (1/4 - 20 SS CONE PT) **	STN. STL.
41	INSERT SCREWS **	STN. STL

<sup>\*</sup> NOT A REPLACEMENT PART

## **Drawing Revision**

Designer: MWP 05/20/19 Revised By:

## **Disclaimer**

Weights (lbs./kg) dimensions (inches/mm) and drawings provided for your guidance. We reserve the right to modify specifications without prior notice.

CONFIDENTIAL: This drawing is the property of EJ GROUP, Inc., and embodies confidential information, registered marks, patents, trade secret information, and/or know how that is the property of EJ GROUP, Inc. Copyright © 2019 EJ GROUP, Inc. All rights reserved.

#### Contact

800 626 4653 ejco.com

<sup>\*\*</sup> NOT SHOWN