



UPS 40-40/4, 1 ph, 115 V, 230 V, 60 Hz

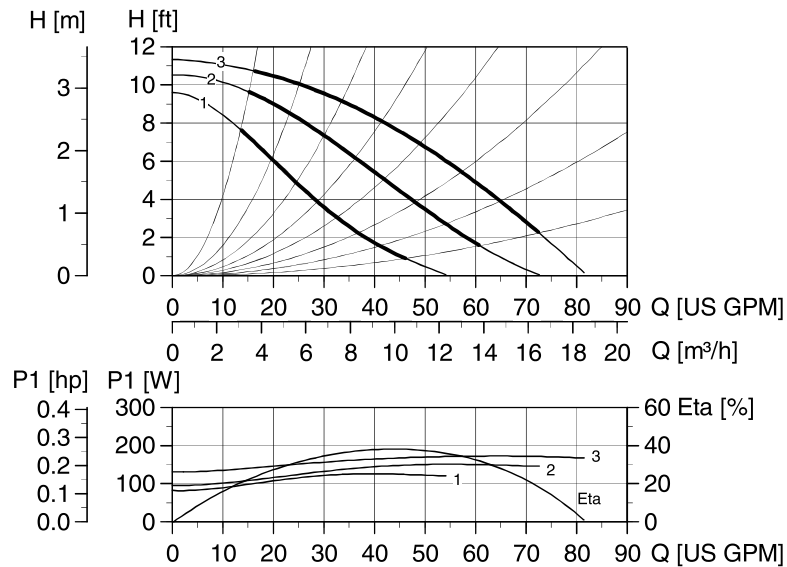

Flow range:	13 - 85 gpm
Head range:	1 - 11 ft
Motor:	4-pole 0.33 Hp
Max. liquid temp (Open):	+140 °F
Max. liquid temp.:	+248 °F
Min. liquid temp.:	+32 °F
Max. system pressure:	145 psi
Net wt:	37.9 lbs (17.2 kg)
Gross wt.:	46.1 lbs (20.9 kg)
Shipping volume:	1.70 ft ³ (0.048 m ³)
Net wt. bronze:	42.3 lbs (19.2 kg)
Gross wt. bronze:	50.5 lbs (22.9 kg)
Shipping volume bronze:	1.70 ft ³ (0.048 m ³)

Note: ETA is calculated as wire-to-water efficiency.

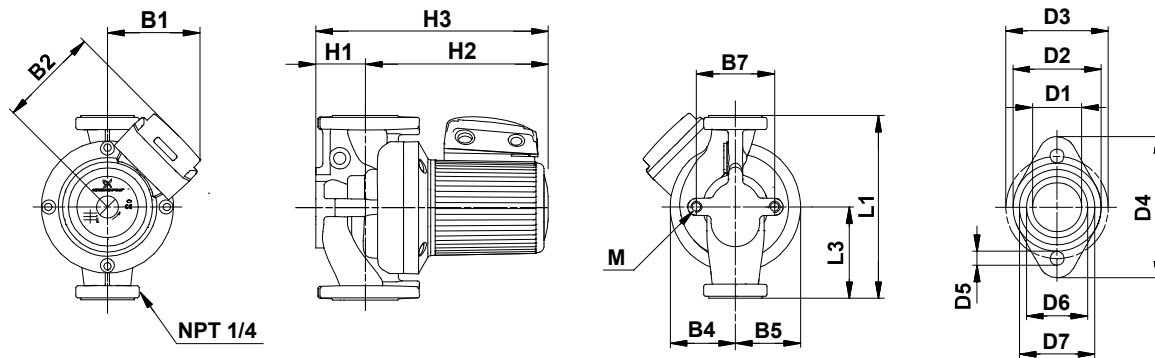

Dimensions

Model		L1	L3	B1	B2	B4	B5	B7	H1	H2	H3	D1	D2	D3	D4	D5	D6	D7	M
UPS 40-40/4	[in]	13.50	6.75	5.31	5.56	3.00	3.00	4.75	2.69	9.69	12.40	1.63	2.88	3.42	5.00	0.50	2.06	2.56	
	[mm]	343	171	135	141	76	76	121	68	246	315	41	73	87	127	13	52	65	M12

Product numbers

Model type	Product number		Voltage [V]
	Cast Iron	Bronze	
UPS 40-40/4 (1 ph)	96402748	96402753	115
	96402749	96402754	230

Connections

Flange size	Flange type
1.50" non ANSI 2 bolt w/ (2) 0.5" dia. holes	GF 40/43

Electrical data

Speed	Max amps [A]		P Max [Watts]	Start amps [A]	
	115V	230V		115V	230V
3	1.60	0.80	170	3.10	1.50
2	1.48	0.74	150	2.87	1.39
1	1.34	0.66	125	2.60	1.24