


# Heavy Pattern Sillcocks

## Product Features

- Angled brass body
- 125 psi
- Operating temperature: 40-160°F
- 3/4" Male hose thread outlet



PFX74DC

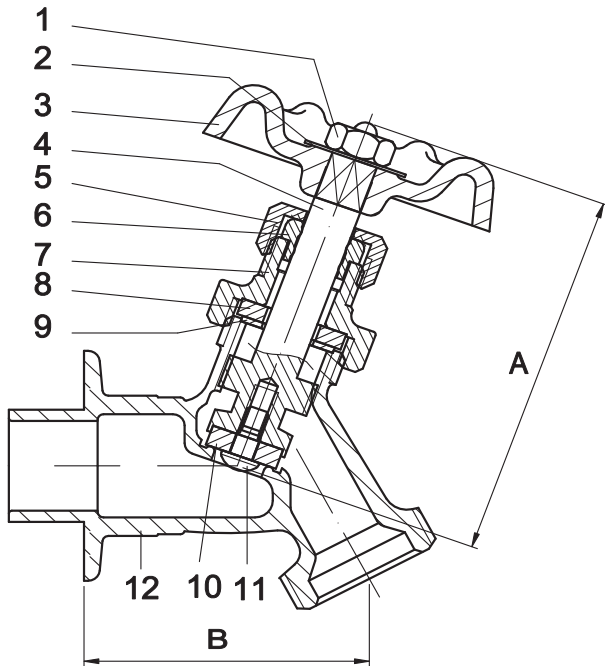

| No. | Part Name     | Material        | QTY |
|-----|---------------|-----------------|-----|
| 1   | Wheel Nut     | Steel           | 1   |
| 2   | Name Plate    | Aluminum        | 1   |
| 3   | Hand Wheel    | Zinc alloy      | 1   |
| 4   | Stem          | Low Lead Brass  | 1   |
| 5   | Packing Nut   | Brass           | 1   |
| 6   | Packing       | NBR             | 1   |
| 7   | Bonnet        | Low Lead Brass  | 1   |
| 8   | Packing       | NBR             | 1   |
| 9   | Ring          | Stainless Stell | 1   |
| 10  | Seat Packing  | NBR             | 1   |
| 11  | Packing Screw | Brass           | 1   |
| 12  | Body          | Low Lead Brass  | 1   |

| SKU     | DESCRIPTION             | INLET CONNECTION         | OUTLET CONNECTION        | A (OPEN) |       | A (CLOSED) |       | B    |       |
|---------|-------------------------|--------------------------|--------------------------|----------|-------|------------|-------|------|-------|
|         |                         |                          |                          | in       | mm    | in         | mm    | in   | mm    |
| PFX74DC | LF 1/2 BRS IPS ANG SILL | 1/2 FIP NPT THREADED END | 3/4 MALE NH THREADED END | 2.81     | 71.37 | 2.56       | 65.02 | 1.9  | 48.26 |
| PFX74FC | LF 3/4 BRS IPS ANG SILL | 3/4 FIP NPT THREADED END | 3/4 MALE NH THREADED END | 2.81     | 71.37 | 2.56       | 65.02 | 2.11 | 53.6  |

Not for use with potable water

## Warranty and Codes

This PROFLO product carries a 1-year limited warranty.



PROP65 WARNING FOR CALIFORNIA RESIDENTS  
 WARNING: Cancer and Reproductive Harm  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

