


## Hillstone Tub Filler

- LG6-1HLSB Finish(B)
- LG6-1HLSBG Finish(BG)
- LG6-1HLSC Finish(C)
- LG6-1HLSD Finish(D)

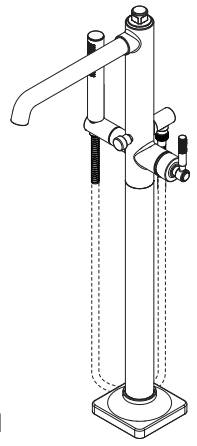

### Specifications

- All Metal Construction
- Trim Only, Valve Not Included

### Features

- 6.5 GPM @ 45 PSI Flow Rate
- 1.8 GPM Flow Rate (Handheld)
- 60" Metal Hose
- All Metal Construction
- Easy to Clean Nozzles
- Optional Concrete Mounting Bracket 931-145 Available (Sold Separately)
- Requires OX6-270R Valve (Sold Separately)
- Volume and Temperature Control
- Ultra Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- CEC Certified/CALGreen compliant
- EPA WaterSense Certified (Handheld)
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



### Dimensions

