

# PF1020G2 / PF1030G2 TWO-HANDLE TUB AND SHOWER FAUCET



## Product Features

- Acrylic handle
- Single-function showerhead
- With tub spout (PF1030G2)
- With union connections
- Max. flow rate 1.75 gpm (6.8 L/min) at 80 psi





## Codes and Certifications



- Certified to ASME A112.18.1 / CSA B125.1
- cUPC/IAPMO listed
- EPA WaterSense certified



**PF1020G2 / PF1030G2**

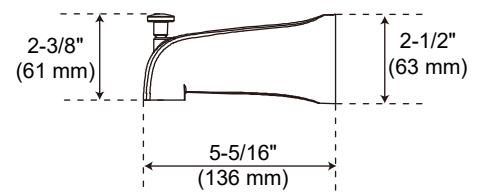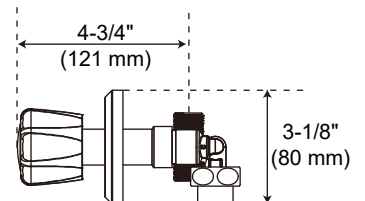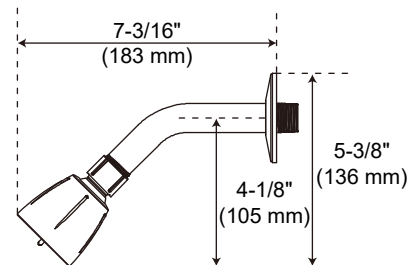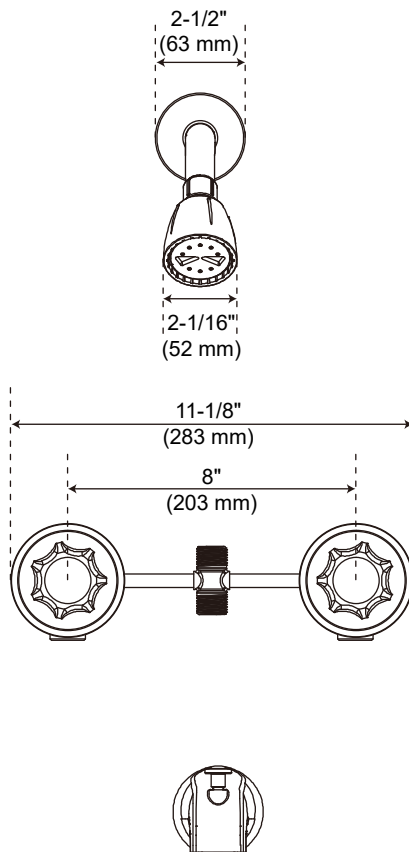

For detailed warranty information, visit [ferguson.com/proflo-faucet-warranty](https://www.ferguson.com/proflo-faucet-warranty).