# AFCON

P.O. Box 3365 South El Monte, CA 91733   626.444.0541   Fax 626.444.3887   www. Afcon.org

510

CPVC - STEEL - COPPER HANGER

SIZE - 3/4" thru 3" pipe.
MATERIAL - Carbon Steel.
FINISH - Mil. Galvanized.
LISTING/APPROVAL -
       c(UL)us **203 - EX 4231, EX 2551**
FUNCTION - To support horizontal piping - CPVC, Copper or Steel.
Hanger in listed mounting positions - Top, Bottom or Side.
Also, provides stability on vertical piping.
INSTALLATION - Per NFPA 13, 13R, 13D and CPVC manufacturers
instructions on top, bottom or side of building element. Space by pipe type.
SPECIAL NOTE: When installing on CPVC sprinkler system pipe:
       Verify that all assembly components are cleaned of any surface oil.
FASTENERS - UL Listed per NFPA 13
       in **WOOD**:
           3/4" - 3" CPVC pipe - **#905** screw - no pre-drill.
           3/4" - 3" Copper pipe - **#905** screw - no pre-drill.
           3/4" - 3" Steel pipe - 1/4"x11/2" lag screw - no pre-drill.
       in **STEEL -** min. 18 GA.
           3/4" - 3" CPVC pipe - 1/4" or #14 Tek Screw.
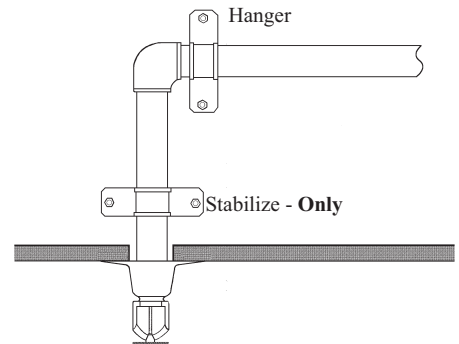   3/4" - 3" Copper pipe - 1/4" or #14 Tek Screw.
           3/4" - 3" Steel pipe - 1/4" or #14 Tek Screw.
 FEATURES
* Offset edge eliminates abrasion.
* Retainer dimples secure hanger to pipe during installation.
* Required *AFCON* **#905** screw has 5/16" hex head - included.
ORDERING - Part # and pipe size.

*CAN ALSO BE USED TO REPLACE - #500 Pipe Strap
#520 Tin Strap

Hanger

Stabilize - **Only**

CAD