

Commercial Flushometer Back Spud Wall-Hung Toilet – 1.0/1.28/1.6 GPF

FEATURES

- TORNADO FLUSH® is a sustainable, high-performance system that effectively removes waste, utilizing 360° of cleaning power to scour the bowl and rim
- Wall-mounted
- Elongated front bowl
- Optional CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Clear glazed trapway coating
- Maximum static load rating of 1000 lbs when used with appropriate wall carrier

MODELS

- **CT728CUV**
Commercial wall-mounted toilet with 1-1/2" back spud inlet, less seat
- **CT728CUVG**
Commercial wall-mounted toilet with 1-1/2" back spud inlet, less seat with CEFIONTECT



ADDITIONAL ITEMS

- SC534 seat
- SC134 seat
- THU111 Retro-fit mounting bolt cap set (4 pcs)

ECOPOWER®	
Exposed	
*TET2UB31#SS	1.0 GPF
◆TET2UA31#SS	
*TET2LB31#SS	1.28 GPF
◆TET2LA31#SS	
TET2GB31#SS	1.6 GPF
◆TET2GA31#SS	
Exposed	
*TET3UB31#SS	1.0 GPF
◆TET3UA31#SS	
*TET3LB31#SS	1.28 GPF
◆TET3LA31#SS	
TET3GB31#SS	1.6 GPF
◆TET3GA31#SS	

*WaterSense Listed

◆Limited Inventory

 TORNADO FLUSH  CEFIONTECT

COLORS/FINISHES

- #01 Cotton

PRODUCT SPECIFICATION

The wall-mounted, low consumption siphon jet flushing toilet shall be 1.0, 1.28, or 1.6 GPF (3.8, 4.8, or 6.0 LPF) when paired with a flush valve of corresponding flush volume. Toilet shall have optional CEFIONTECT ceramic glaze. Toilet can be mounted at ADA height. Toilet shall be TOTO Model CT728CUV(G)_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant
- Complies with CA Prop 65 warning requirements
- To complete a WaterSense listed combination, the bowl must be paired with a flush valve which is EPA WaterSense listed



CT728CUV(G)

Commercial Flushometer Back Spud Wall-Hung Toilet – 1.0/1.28/1.6 GPF


SPECIFICATIONS

Water Use	1.0/1.28/1.6 GPF (3.8/4.8/6.0 LPF)
Flush System	Siphon Jet Flushing Action
Water Surface	9-1/4" x 7"
Water Pressure	Min: 25 psi (Flowing) Max: 80 psi (Static)
Min. Flow Rate	24 GPM
Trap Diameter	2-1/8"
Trap Seal	2-1/8"
Material	Vitreous China
Warranty	One Year Limited Warranty
Shipping Weight	59.5 lbs.
Shipping Dimensions	19-1/8" L x 14-3/4" W x 29-1/8" H

INSTALLATION NOTES

Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073R. Can be used with exposed or concealed top inlet flush valves.

DIMENSIONS

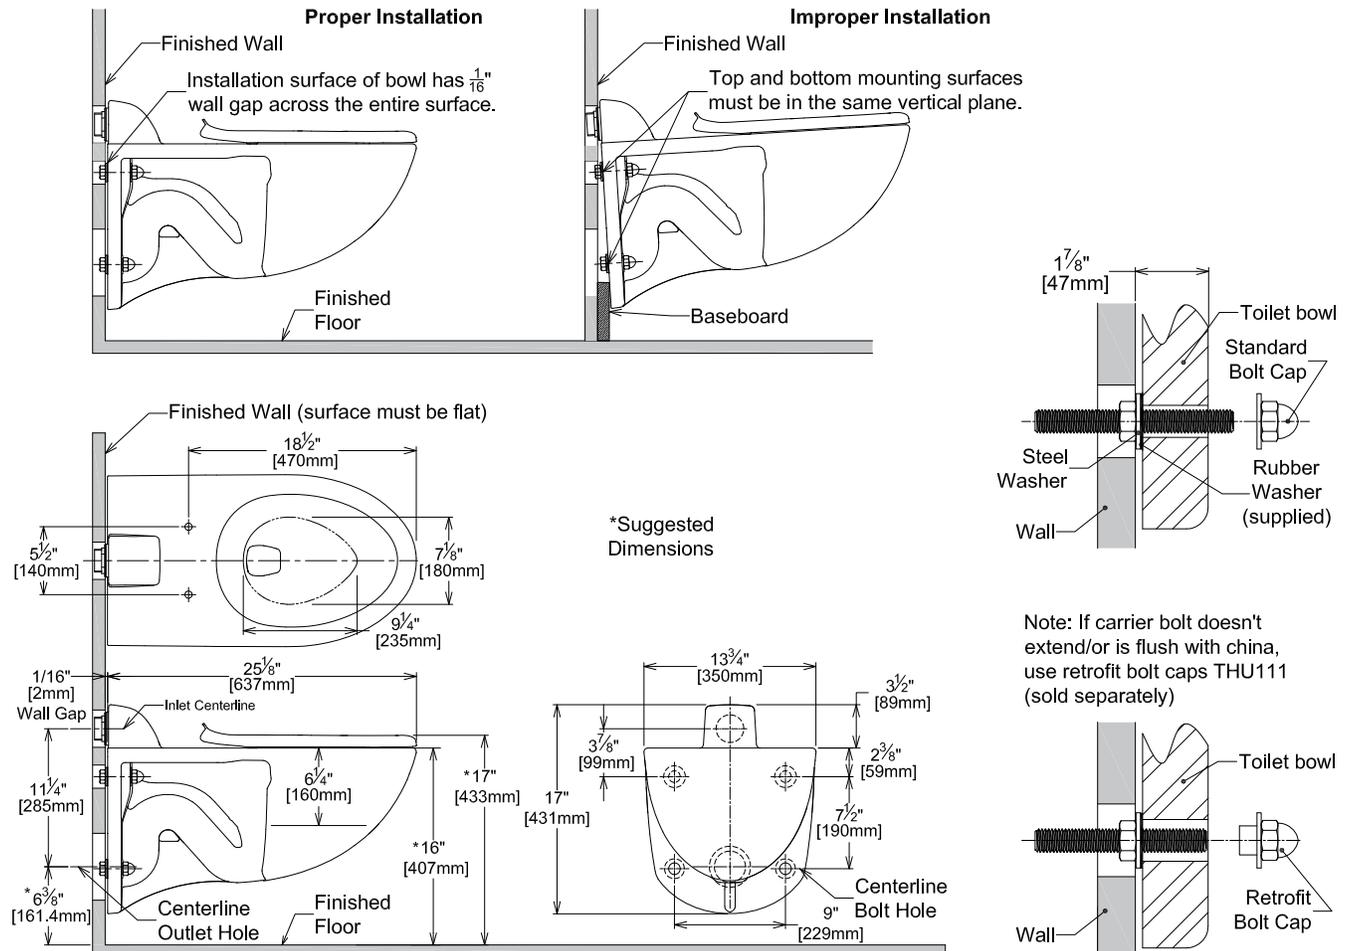

TOTO

These dimensions and specifications are subject to change without notice