

WOOD AND METAL STUD SPECFLEX® BRACKET



Figure 2407



NFP240724

FEATURES & BENEFITS

- One-piece bracket for use on wood or metal studs
- Includes open gate bracket for easy adjustments
- Comes fully assembled for faster installation
- Length: 24" (adjustment range: 7-1/4" – 24")
- Height: 2-3/4"
- Meets Buy American Act (BAA) requirements


TECHNICAL DATA

- Material: Zinc-plated steel, ASTM A-366
- Bracket thickness: 2.0mm, ± 0.05
- See Specflex® Hose data sheets for UL/FM approved assemblies

INSTALLATION

- Please refer to NFP Specflex® Installation Manuals for proper installation guidelines

WOOD STUD INSTALLATION DIAGRAM

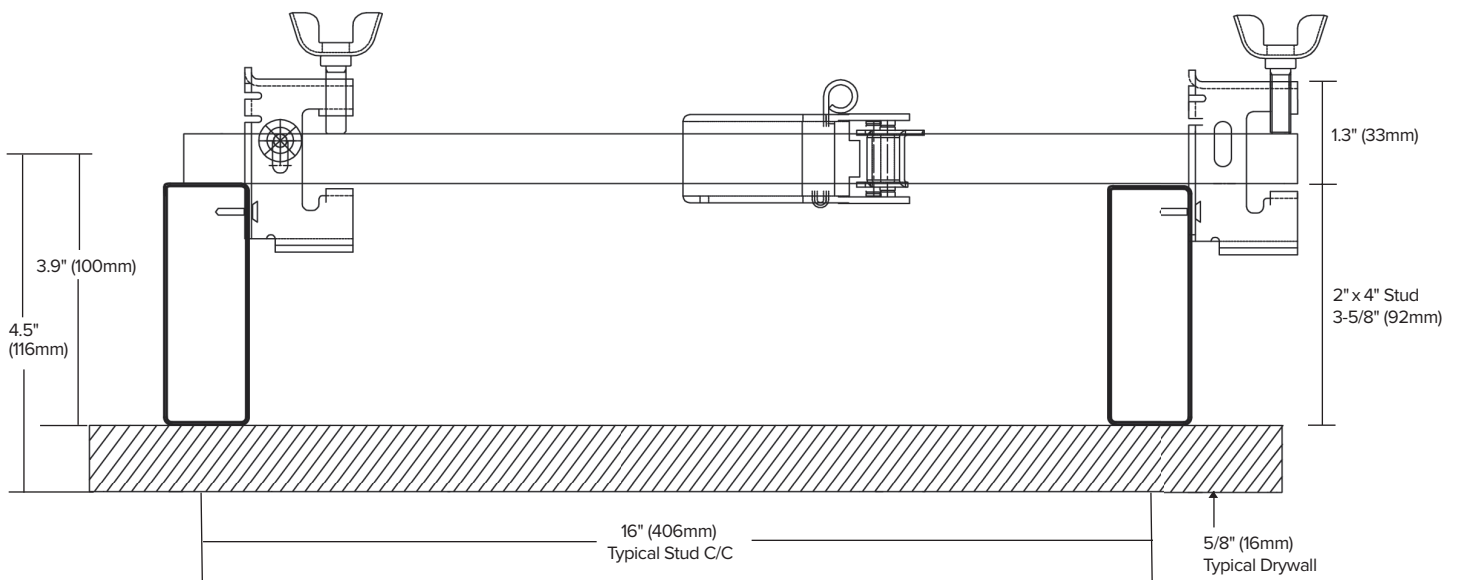

WOOD AND METAL STUD SPECFLEX® BRACKET



Figure 2407

METAL STUD INSTALLATION DIAGRAM

