


Submitted Model No.: _____

Specific Features: _____

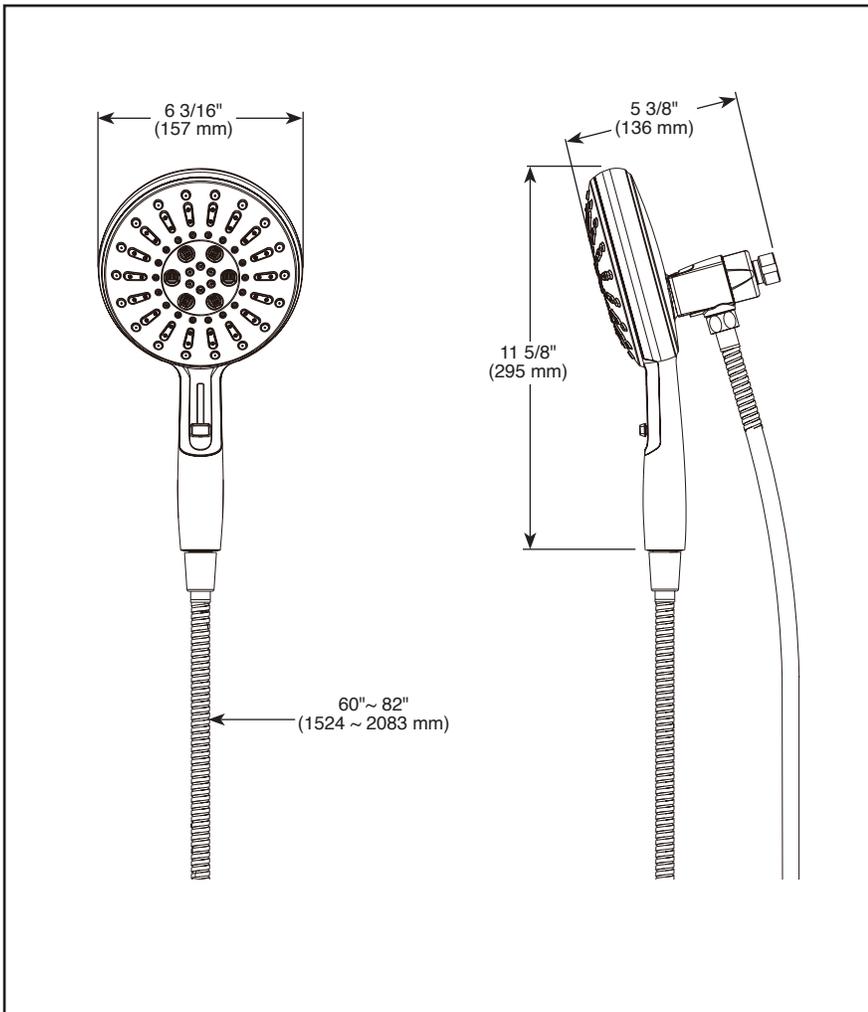

▲ Designate proper finish suffix

◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.



see what Delta can do™

SUREDOCK™ MAGNETIC HAND SHOWER

■ Magnetic hand held shower with 7 spray settings

FEATURES:

- H₂Okinetic® Technology
- Touch-Clean® Nozzles
- MagnaTite® Docking

STANDARD SPECIFICATIONS:

- Maximum flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Slide switch to changes from powerful to relaxing sprays, including pause
- SureDock™ Magnetic allows for easy and secure docking for hands-free showering
- 60" - 82" (1524mm-2083mm) stretchable metal hose

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) – 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- ASME A112.18.3 ◆
- EPA WaterSense®