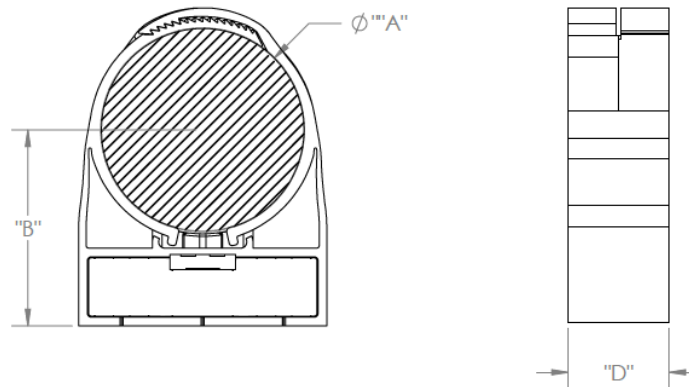


Product Information Sheet

H88.64-LOK A88.64-LOK

Thermoplastic "Push-to-Lok" hanger for pipe, conduit, piping, and cabling. See www.HangerLok.com for more information.



Physical Specifications:

Max compatible diameter ($\varnothing A$):	2.91 inches (74 mm)
Min compatible diameter ($\varnothing A$):	2.48 inches (63mm)
Base to center of clamp (B):	2.72-3.02 inches
Base width (C):	3.43 inches
Base Depth (D):	1.57 Inches

Applications (including but not limited to):

Plumbing:	63mm Pipe
-----------	-----------

Material Specifications:

Material Type:	
H88.64-LOK	Nylon (PA) 66
A88.64-LOK	HDPE
Color:	RAL Gray standard (other colors available for special order)
UV Resistant:	Yes
Flammability Rating:	
H88.64-LOK	UL94V0 (ECO) or V2 (Technyl)
A88.64-LOK	

Product Information Sheet





Packaging Specifications:

Quantity per carton	25 pcs
Carton size (L x W x H)	16" x 13" x 8"
Carton weight:	5.5 lbs (approx.)

Regulatory Compliance:

ROHS 2 Compliant:	Yes
REACH Compliant:	Yes

Compatible Accessories:

Flange:	F71113-38 (Formerly LT106). Stainless flange to adapt hanger to 3/8" thread.	 F71113-38
Strutcatcher	LT109 . Adapts to strut and provides secure mounting for all HangerLok products. *Typical use is 2 per hanger.	

Contact Us:

Litchfield-HangerLok, LLC
170 West Road. Suite #3
Portsmouth, NH 03801
Tel: (888) 443-3999
Email: orders@hangerlok.com

Made in USA