

# Traverse Direct

14210S | 1.0

## GENERATION LIGHTING

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

**SAVE THESE INSTRUCTIONS!**

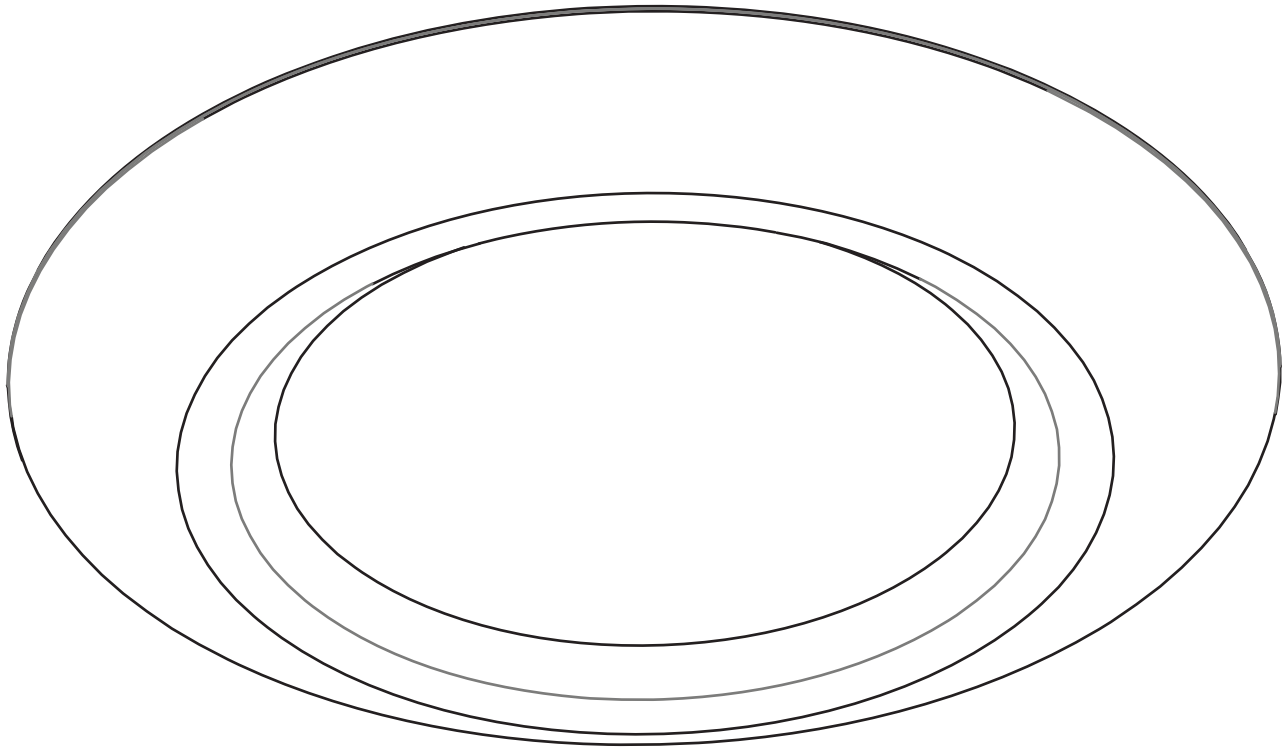

### GENERATION LIGHTING


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

## Install the Fixture

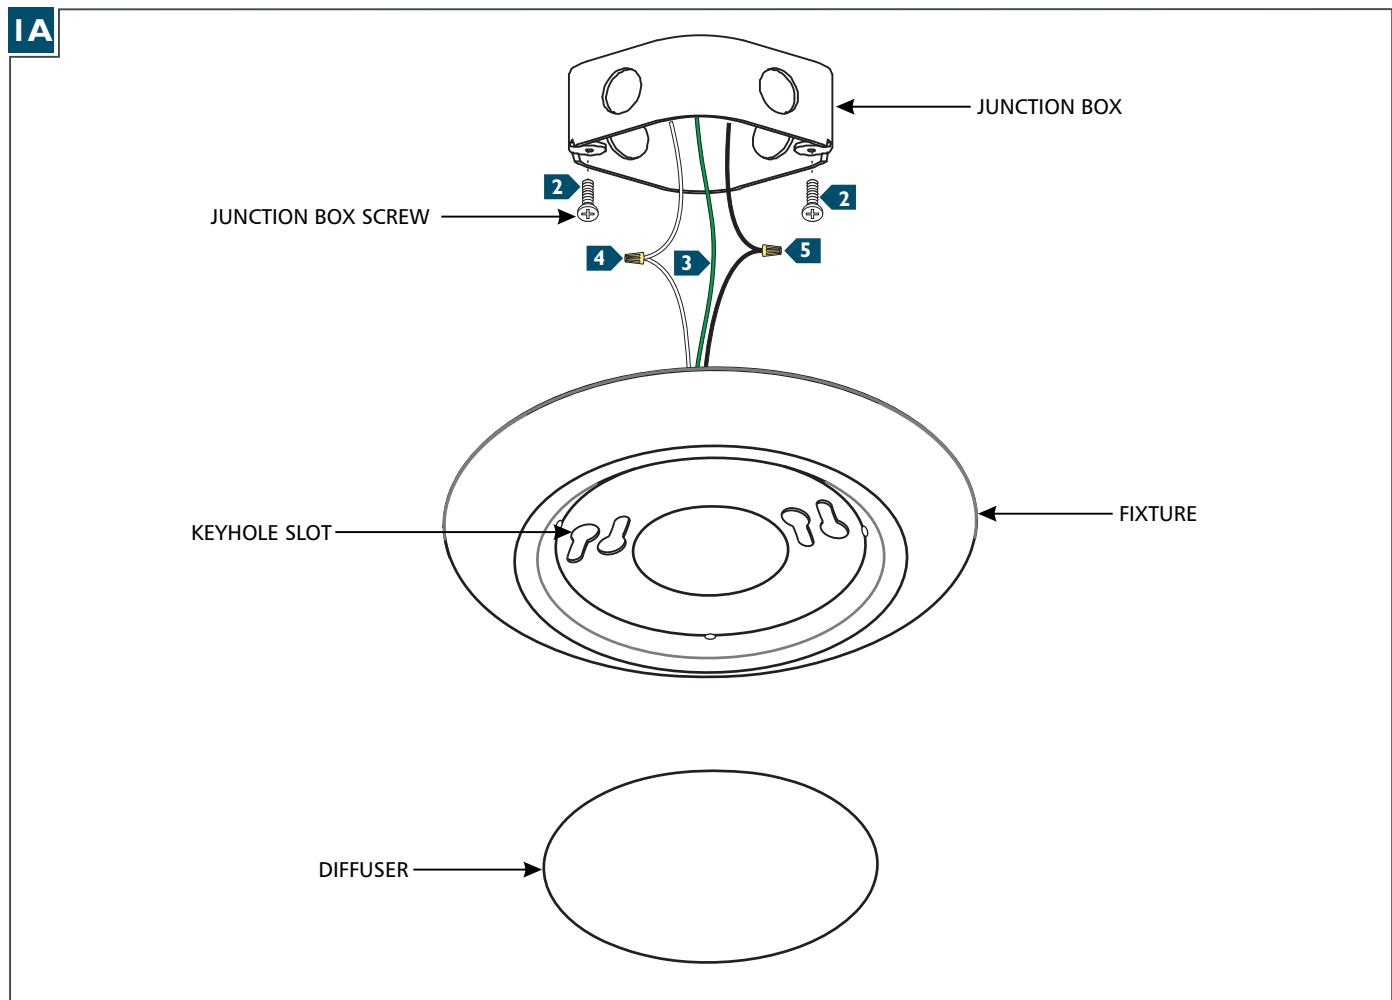

- 1** Remove the diffuser from the fixture by twisting it counterclockwise.
- 2** Install junction box screws into the junction box, leaving enough length to install the fixture using the keyhole slots.
- 3** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 4** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5** Connect the black fixture wire to the hot power line wire with a wire nut.
- 6** Properly place the wire nuts and wires into the junction box, align the keyhole slots on the fixture with the junction box screws, push the fixture flush against the ceiling, and rotate it clockwise to lock in place. If necessary, screw the junction box screws until snug.
- 7** Reinstall the diffuser by screwing it clockwise onto the fixture.