



30,000 BTU/H AIR HANDLER HEAT PUMP SYSTEM

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____




ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ DATE _____

Indoor Unit (IDU): DRAM30S1A	Outdoor Unit (ODU): DRA1U30S1A	WIRED REMOTE DRSTAT100
		

PRODUCT FEATURES

- High-efficiency constant volume variable speed motor
- Multi-position installation: horizontal (right or left), vertical (up or down)
- Built-in dehumidifier, humidifier, and IAQ ports
- All aluminum coil
- Anti-corrosive coil fin coating
- Low ambient heating down to -13°F
- Low ambient cooling down to 5°F
- Included base pan heater
- DRSTAT100 programmable thermostat included
- Automatic airflow configuration technology
- Multiple operation modes (Cool, Heat, Aux, Dry, Fan, Auto)
- 24V thermostat compatible
- Optional electric heat (not included)

EFFICIENCY DATA	
SEER2	17.3
EER2	10.6
HSPF2	8.5
COP at 47°F ²	3.25
COP at 17°F ⁴	2.47
COP at 5°F ⁵	1.70

SYSTEM DATA	
Refrigerant Type	R-410A
Refrigerant Charge (oz.)	107.59
Design Pressure (PSIG)	550/340
Indoor/ Outdoor Coil Coating	Golden Fin Coating

CAPACITIES		
Cooling Capacity (BTU/hr)	Rated at 95°F ¹	30000
	Maximum at 109°F	29000
	Maximum at 5°F ³	30000
	Minimum	9500
	Maximum	33000
Heating Capacity (BTU/hr)	Rated at 47°F ²	31000
	Rated at 17°F ⁴	20000
	Rated at 5°F ⁵	17800
	Minimum	12200
	Maximum	32000

Specifications are subject to change without notice.
 © 2023 Ferguson Enterprises LLC
 www.durastar.com





30,000 BTU/H AIR HANDLER HEAT PUMP SYSTEM SPECIFICATIONS

LINE SET REQUIREMENTS	
Connection Type	Flare or Braze
Liquid (Insulated)	Ø3/8" (Ø9.52mm)
Gas	Ø3/4" (Ø19.10mm)
Pre-Charge Length	25'
Minimum Length	10'
Maximum Length	164'
Maximum Height Differential	82'
Additional Refrigerant (oz./ft)	0.69

OUTDOOR UNIT		
Unit Dimensions	Width	37-1/4"
	Depth	16-1/8"
	Height	31-7/8"
Carton Dimensions	Width	42-15/16"
	Depth	19-11/16"
	Height	34-7/8"
Net Weight	142 lbs.	
Gross Weight	152 lbs.	
Cooling Operating Temperature	5°F - 122°F	
Heating Operating Temperature	-13°F - 75°F	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Recommended Breaker (Amps)	35	
Minimum Circuit Ampacity (Amps)	20	
Communication Wire Size	16/2 AWG Stranded Shielded or 18/8 Thermostat Wire	
Rated Current - Cooling (Amps) ¹	13.2	
Rated Current - Heating (Amps) ²	12.4	
Fan Motor RLA (Amps)	1.4	
Fan Motor Output (Watt)	120	
Sound Pressure (dB(A))	59.5	

INDOOR UNIT		
Unit Dimensions	Width	21"
	Depth	21"
	Height	49"
Carton Dimensions	Width	26-9/16"
	Depth	24-7/16"
	Height	52-9/16"
Net Weight	129 lbs.	
Gross Weight	156 lbs.	
Blower Motor Type	Constant Volume Variable Speed	
Indoor Unit Air Flow (CFM)	Low	712
	Medium	806
	High	894
	Turbo	1088
Drain Port Size	3/4"	
Moisture Removal (Pints/day)	183	
Recommended Breaker (Amps)	15	
Indoor Fan Motor RLA (Amps)	3.5	
Sound Pressure (dB(A))	Low	28.0
	Medium	37.5
	High	40.5
Static Pressure Range ⁶ (in. wg.)	0 - 0.8	
Filter Dimensions (WDH) (in.)	16 x 20 x 1	

COMPRESSOR	
Type	Inverter Rotary
Rated Current (RLA) (Amps)	16
Oil Type	Ester Oil VG74
Oil Charge (oz.)	22.7 (670ml)

AHRI Rated data is taken at a fixed compressor speed.

¹ AHRI Rated at 95°F (AFull).

² AHRI Rated at 47°F (H1Full).

³ Maximum Capacity: Indoor 80°F DB, 67°F WB // Outdoor 5°F DB, 4°F WB

⁴ AHRI Rated Capacity at 17°F (H32)

⁵ AHRI Rated Capacity at 5°F (H42)



⁶ Static pressure at full required airflow for AHRI testing is 0.5 in.WG.





30,000 BTU/H AIR HANDLER HEAT PUMP SYSTEM

IDU DIMENSIONS - DRAM30S1A

Dimensions

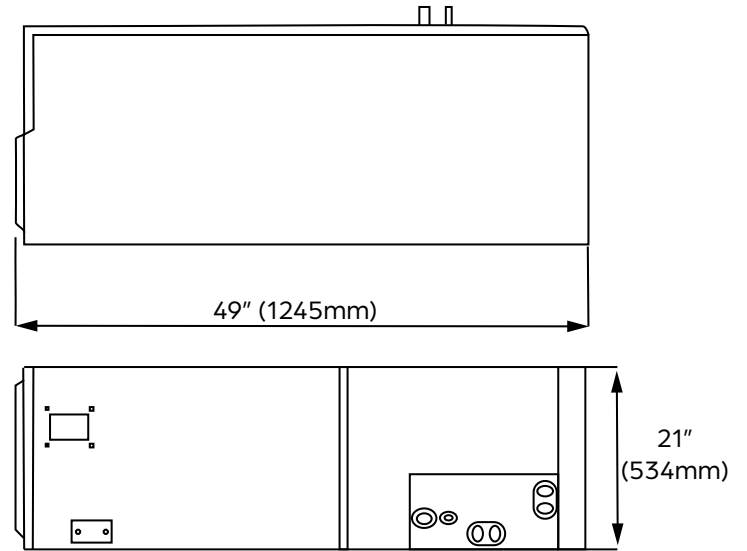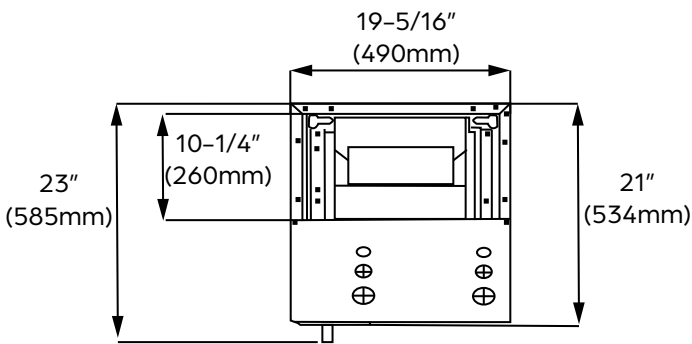

Clearances



Auxiliary Electric Heaters (Optional)


Model	(Btu/h)
DRHTR05BRKA	5kW
DRHTR08BRKA	8kW
DRHTR10BRKA	10kW
DRHTR15BRKA	15kW




30,000 BTU/H AIR HANDLER HEAT PUMP SYSTEM

ODU DIMENSIONS - DRA1U30S1A

Clearances

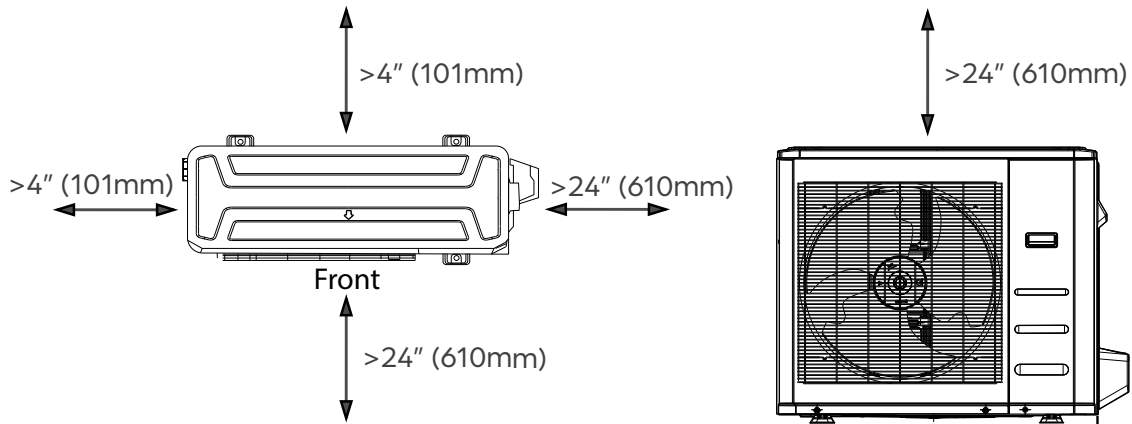

Dimensions

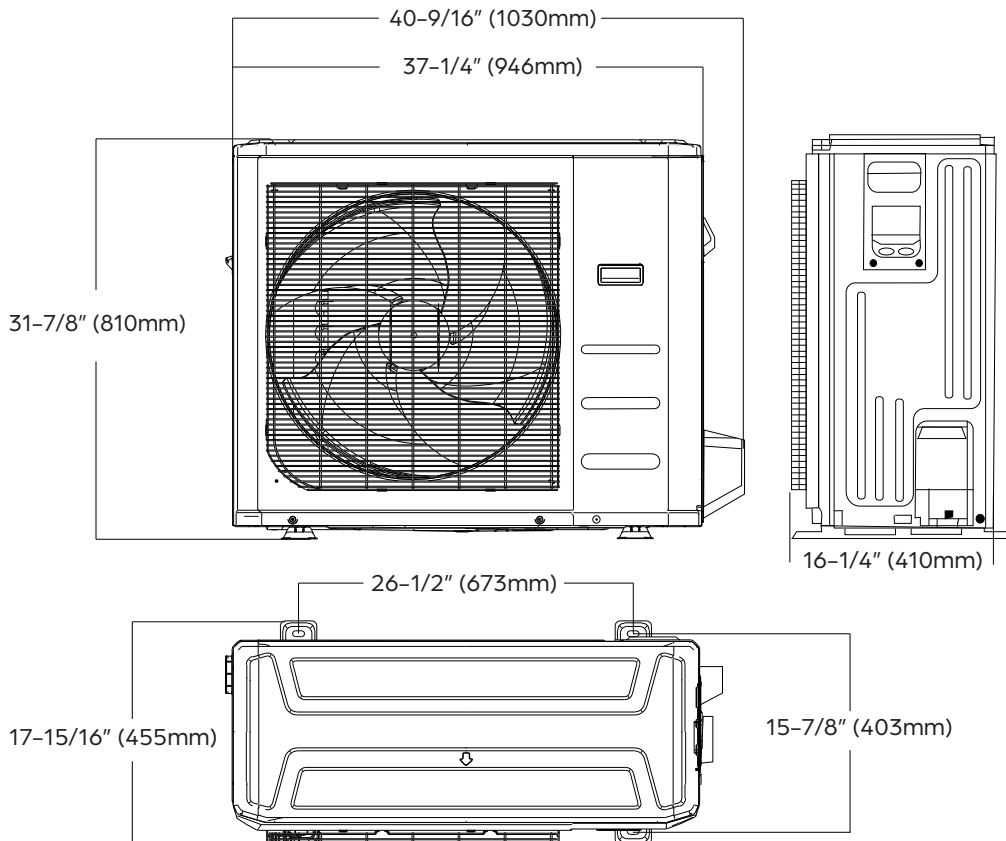

NOTE

Illustrations in this document are for explanatory purposes. The actual shape of your equipment may vary slightly.