




# Installation Manual


## (Flex Vent 2 in. Conversion Kit)

### Included Accessories

Part No.	Part	Shape	Qty
①	Air Intake Filter		1
②	EZTR Adapter		1
③	Installation Manual (this document)		1

**NOTE** Follow the unit's installation manual on how to adjust DIP switch appropriately for proper unit operation after completing installation.


### Complete Image

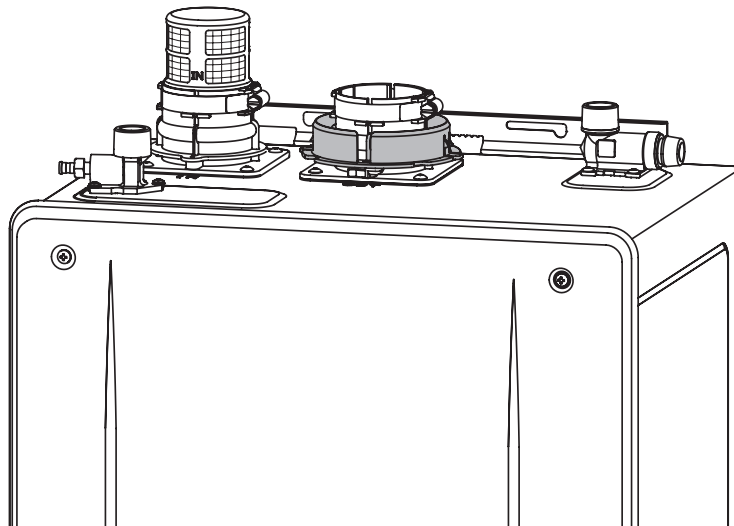



## Installation

### 1 Insert the Air Intake Filter into the Air Intake Flue (on the left side of the unit).

**NOTE** Avoid installation near a washer/dryer. Lint/dust from the washer/dryer can clog the Inlet Screen causing incomplete combustion to occur.

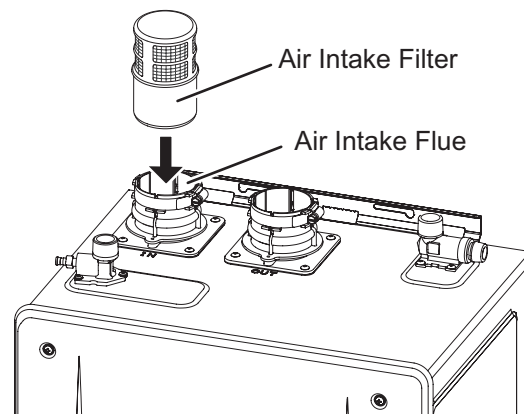


### 2 Continue to insert Air Intake Filter until it reaches to the base of the Air Intake Flue.

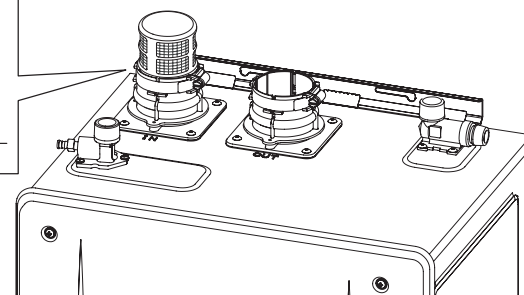


### 3 Secure the band. Only tighten by a hand screwdriver.


**NOTE** Do not use electric drivers, impact drivers and so forth.

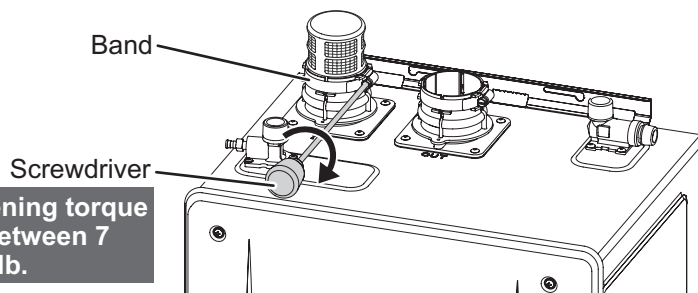

### 4 Put the EZTR Adapter the Exhaust Flue (on the right side of the unit).

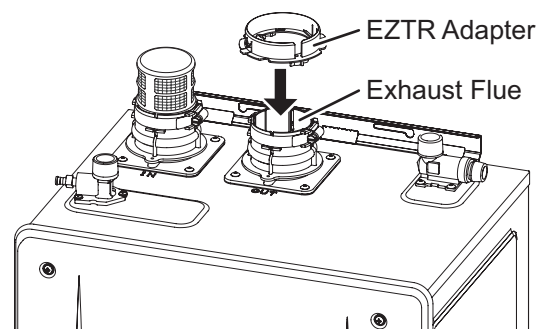

### 5 Spin and lock the EZTR Adapter on the Exhaust Flue as shown figure right.

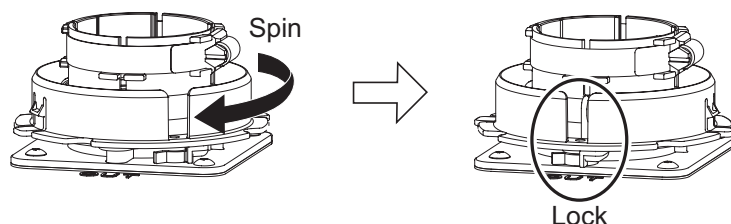

## Note to the installer

Notify the customer that periodical checking and cleaning of the Inlet Screen will be required to clean off any accumulated dust/debris with a vacuum cleaner or damp towel. Do not remove the Air Intake Filter from the Air Intake Flue when cleaning of Air Intake Filter. A clogged Inlet Screen will cause incomplete combustion to occur.