



THERMOSTATS and Accessories



Replacement Components
Carrier

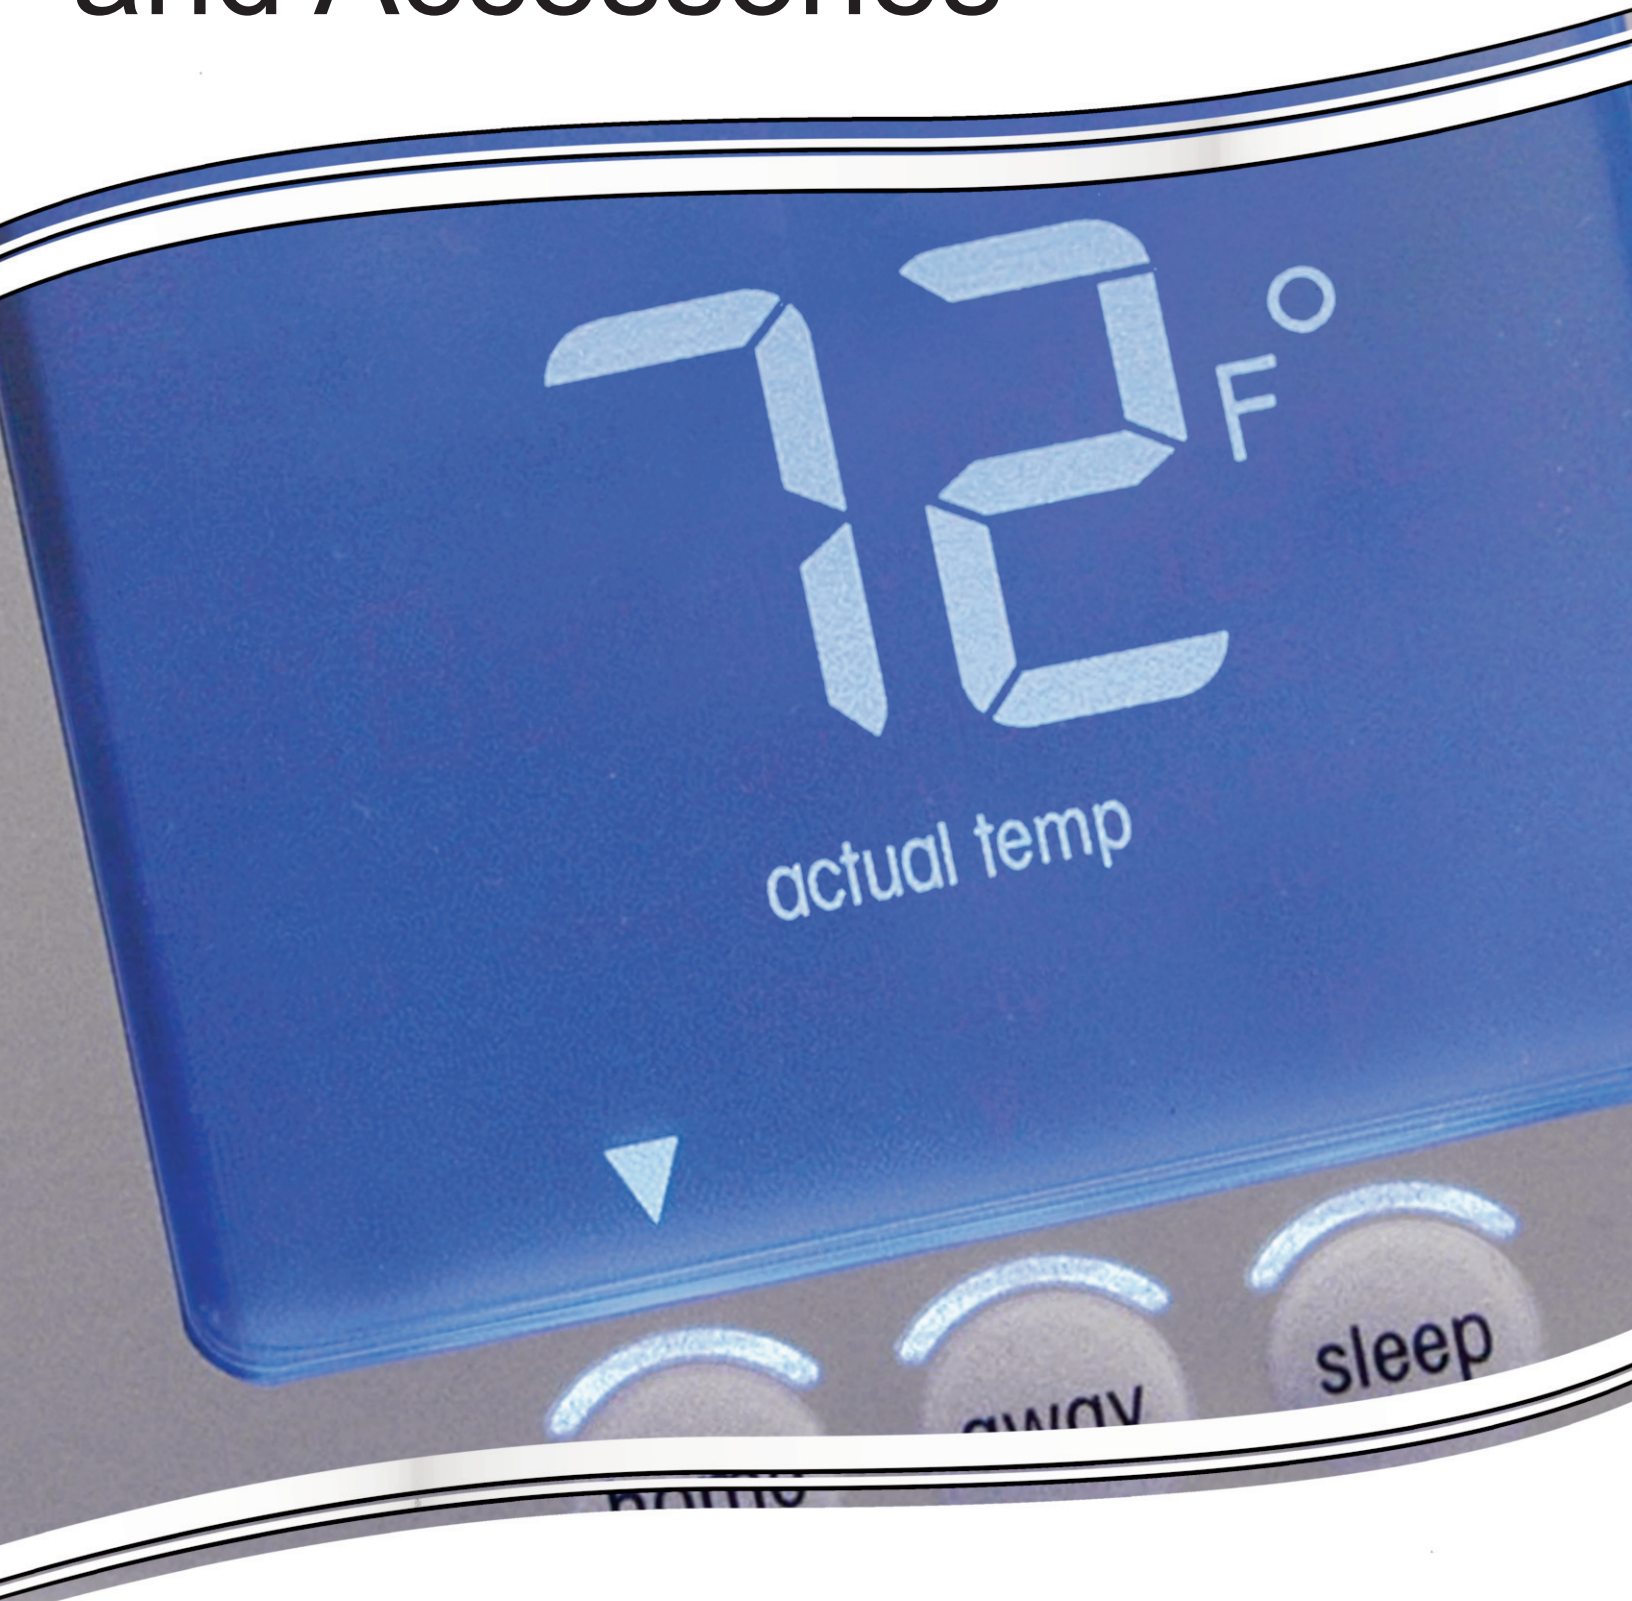

turn to the experts 



Thermostat Table Of Contents



Thermostat Model Number Nomenclature 3



RNC Thermostats - Builder, Construction
Programmable, Non-Programmable and Heat Pump 4 - 5



Builder, Construction Upgrade
Programmable, AC and Heat Pump 4 - 5



Base Model Thermostats - Entry
Programmable, Non-Programmable and Heat Pump 6 - 7



Deluxe Thermostats - Sleek Design, Many Options
Programmable, Non-Programmable and Heat Pump 8 - 9




EZ3 Wi-Fi® Programmable Thermostat
With identical interface with Smartphone and Tablet with App 10

Note: Totaline® thermostats available while supplies last
Wi-Fi® is a registered trademark of Wi-Fi Alliance®.


Thermostats




CARRIER® BRANDED THERMOSTAT MODEL NUMBER NOMENCLATURE

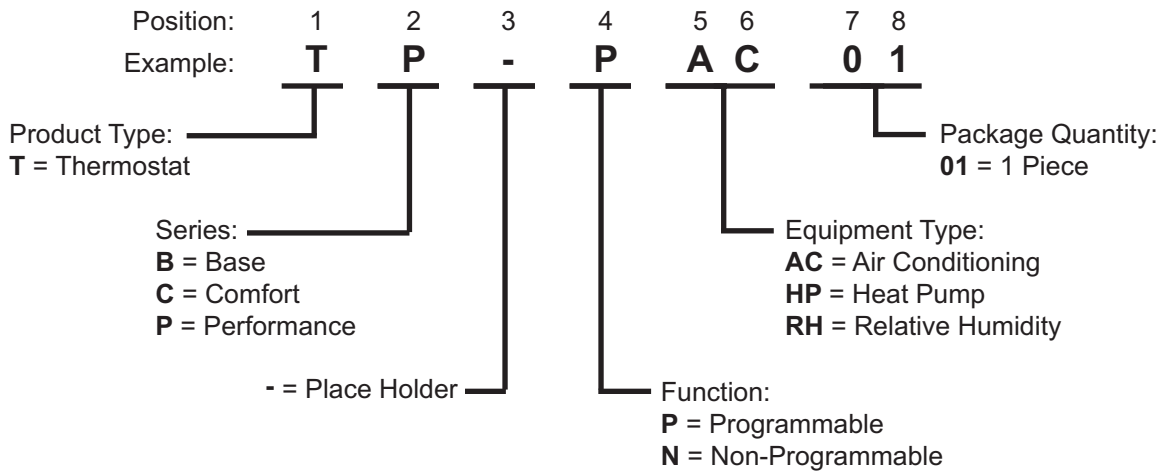

BRYANT® BRANDED THERMOSTAT MODEL NUMBER NOMENCLATURE

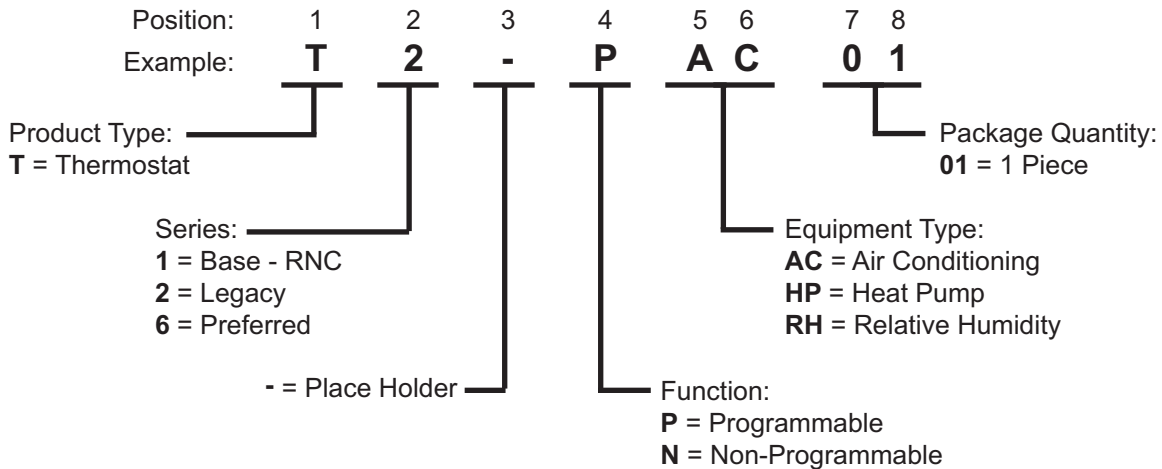

TOTALINE® BRANDED THERMOSTAT MODEL NUMBER NOMENCLATURE

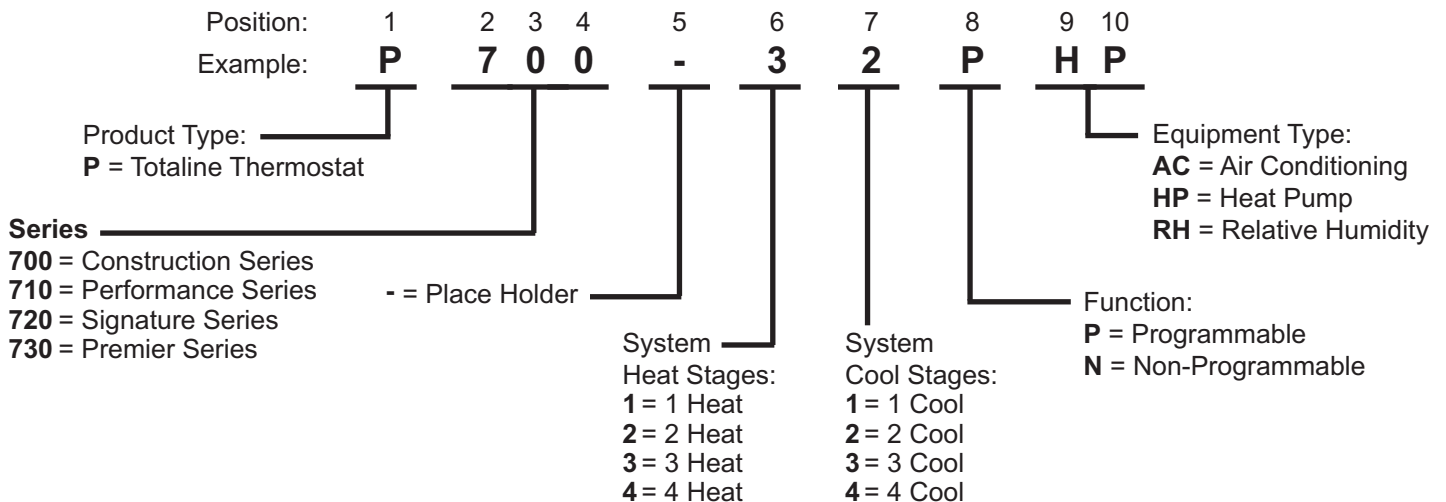


RNC Thermostats



Carrier® Base TB-NAC01-A, TB-PAC01-A, TB-PHP01-A, TB-NHP01-A
Bryant® Legacy™ T1-PAC, T1-PHP, T1-NAC, T1-NHP
Totaline® Construction P700U-21NHP*, P700U-21PHP*



RNC Programmable
Thermostat



RNC Non- Programmable
Thermostat

These RNC thermostats consists of programmable and non-programmable air conditioner and heat pump controls. These units feature non-mercury, non-lead based electronic controls built into a subtle, slim plastic enclosure.

Features

Both Programmable and Non-Programmable Models

- Non-volatile memory to retain settings during a power outage
- English/Metric units selection
- Modes include Off, Cool, Heat and Eheat (emergency heat on heat pump models only)
- Auxiliary heat indicator (heat pump models only)

Programmable Models

- 5-2 days programmable
- Operation with batteries optional

Air Conditioner Control

- 1-stage heat / 1-stage cool

Heat Pump Control

- 2-stage heat / 1-stage cool

Specifications

Physical Characteristics

Programmable Thermostat Dimensions: 3.6"H x 5.5"W x 1.0"D

Non-Programmable Thermostat Dimensions: 2.7"H x 4.3"W x 0.9"D

Electrical

- Input volts/amps: 24VAC, 3 VA

Environment

- Operating temperature/Relative humidity: 32°F (0°C) to 104°F (40°C), 95% RH non-condensing
- Storage temperature/Relative humidity: -40°F (-40°C) to 134°F (57°C), 95% RH non-condensing

Wiring Requirements

Standard 18 to 22 gauge, local wiring codes supercede.

Totaline® Programmable Builder, Construction Upgrade P710U-21PHP*



Programmable Builder
Upgrade Thermostat

Features

- Universal Application Up To 2 Heat/1 Cool HP
- Front Load Battery
- Configurable Backlighting
- Heating/Cooling Indicator
- Keypad Lockout
- Compressor Protection
- Hardwire or Battery
- 4 Square Inch Display

Physical Characteristics

- Programmable Thermostat Dimensions: 5.2"H x 5.2"W x 1.2"D

RNC Thermostats



Carrier® Base TB-NAC01-A, TB-PHP01-A
Bryant® Legacy™ T1-PAC01-A, T1-PHP01-A, T1-NAC01-A, T1-NHP01-A
Totaline® Construction P700U-21NHP*, P700U-21PHP*, P710U-21PHP*

RNC Thermostat Model Comparison

Brand	Ordering Model Number	Programmable	Non-Prommable	Equipment Type		
				AC	HP	RH
Carrier	TB-NAC01-A	-	X	X	-	-
Carrier	TB-PHP01-A	X	-	-	X	-
Bryant	T1-NAC01-A	-	X	X	-	-
Bryant	T1-NHP01-A	-	X	-	X	-
Bryant	T1-PAC01-A	X	-	X	-	-
Bryant	T1-PHP01-A	X	-	-	X	-
Totaline	P700U-21NHP*	-	X	X	X	-
Totaline	P700U-21PHP*	X	-	X	X	-
Totaline	P710U-21PHP*	X	-	X	X	-
Totaline	P710U-21NHP*	-	X	X	X	-

AC = Air Conditioning
 HP = Heat Pump
 RH = Relative Humidity

* = notation while supplies last

Parts and Accessories

- TX-LBP01— Large decorative backplate for P710U-21PHP
- TX-MBP01— Medium decorative backplate for TB-PAC, TB-PHP, T1-PAC, T1-PHP, P700U-21PHP
- TX-SBP01 — Small decorative backplate for TB-NAC, TB-NHP, T1-NAC, T1-NHP, P700U-21NHP


Base Thermostats



Carrier® Comfort™ TC-PAC01-A, TC-PHP01-A, TC-NAC01-A, TC-NHP01-A
Bryant® Legacy™ T2-NAC01-A, T2-NAC01-A, T2-NAC01-A, T2-PHP01-A
Totaline® Signature P720-11NHP*, P720-11PAC*, P720-32PHP*



**Base Programmable
Thermostat**



**Base Non-Programmable
Thermostat**

These Base Series of thermostats consists of programmable and non-programmable air conditioner and heat pump controls. These units feature non-mercury, non-lead based electronic controls built into a subtle, slim plastic enclosure.

Features

Both Programmable and Non-Programmable Models

- Continuous display back-lighting configurable
- Auto changeover available
- Non-volatile memory to retain settings during a power outage
- Optional battery operation
- English/Metric units selection
- Keypad lockout
- RC / RH power compatible
- Configurable setpoint limits

Programmable Models

- Touch-N-Go™ programmability
- 5-2 or All Days programmable
- 4 or 2 periods per day selectable
- Battery Backup

Air Conditioner Control

- 1-stage heat / 1-stage cool

Heat Pump Control

- 3-stage heat / 2-stage cool

Specifications

Physical Characteristics

- Programmable Thermostat Dimensions: 5.2"H x 5.2"W x 1.2"D
- Non-Programmable Thermostat Dimensions: 4.1"H x 5.1"W x 1.1"D

Electrical

- Input volts/amps: 24VAC, 3 VA, RC/RH compatible

Environment

- Operating temperature/Relative humidity: 32°F (0°C) to 104°F (40°C), 95% RH non-condensing
- Storage temperature/Relative humidity: -40°F (-40°C) to 134°F (57°C), 95% RH non-condensing

Wiring Requirements

Standard 18 to 22 gauge, local wiring codes supercede.

Base Thermostats



Carrier® Comfort™ TC-PAC01-A, TC-PHP01-A, TC-NAC01-A, TC-NHP01-A
Bryant® Legacy™ T2-NAC01-A, T2-NAC01-A, T2-NAC01-A, T2-PHP01-A
Totaline® Signature P720-11NHP*, P720-11PAC*, P720-32PHP*

Base Thermostat Model Comparison

Brand	Ordering Model Number	Programmable	Non-Prommable	Equipment Type		
				AC	HP	RH
Carrier	TC-NAC01-A	-	X	X	-	-
Carrier	TC-NHP01-A	-	X	-	X	-
Carrier	TC-PAC01-A	X	-	X	-	-
Carrier	TC-PHP01-A	X	-	-	X	-
Bryant	T2-NAC01-A	-	X	X	-	-
Bryant	T2-NHP01-A	-	X	-	X	-
Bryant	T2-PAC01-A	X	-	X	-	-
Bryant	T2-PHP01-A	X	-	-	X	-
Totaline	P720-11NAC*	-	X	X	-	-
Totaline	P720-11PAC*	X	-	X	-	-
Totaline	P720-32PHP*	X	-	X	X	-

AC = Air Conditioning
 HP = Heat Pump
 RH = Relative Humidity

* = notation while supplies last

Parts and Accessories

- TX-LBP01 — Large decorative backplate for TC-PAC, TC-PHP, T2-PAC, T2-PHP, P720-11PAC and P720-32PHP
- TX-MBP01 — Medium decorative backplate for TC-NAC, TC-NHP, T2-NAC, T2-NHP, P720-11NAC

Deluxe Thermostats



Carrier® Performance™ TP-NAC01-A, TP-NHP01A, TP-NRH01-B, TP-PAC01-A, TP-PHP01A, TP-PRH01-A*, TP-PRH01-B

Bryant® Preferred™ T6-NRH01-B, T6-NHP01-A, T6-PHP01-A, T6-PRH01-B

Totaline® Premier P730-11NAC*, P730-11PAC*, P730-32NRH-01*, P730-32PHP*, P730-32PRH*



**Deluxe Programmable
Thermostat**



**Deluxe Non- Programmable
Thermostat**

These Deluxe thermostats consists of programmable and non-programmable air conditioner, heat pump and Thermidistatt controls. These units feature non-mercury, non-lead based electronic controls built into a subtle, slim plastic enclosure.

Features

Programmable and Non-Programmable Models

Outdoor Air Temperature (OAT) sensor option

- Auto changeover available
- Battery free
- Non-volatile memory to retain settings during a power outage
- Keypad lockout
- English/Metric units selection
- Filter/UV light/Humidifier pad replacement indicators
- Continuous display back-lighting configurable
- Hybrid Heat compatible
- RC/RH power compatible
- 2-wire communicating installation option

Programmable Models

- ExP™ expansion port** for use with future enhancements and/ or features
- Programmable with personal computer***
- 7, 5-2, All Days programmable
- 4 or 2 periods per day programmability
- Programmable fan by period
- Vacation mode controls temperature and humidity
- Remote room sensor option
- Adjusts automatically for Daylight Savings Time

Non-Programmable models

- Touch-N-Go™ programmability

Air Conditioner Control

- 1-stage heat / 1-stage cool

Heat Pump Control

- 3-stage heat / 2-stage cool

Thermidistat Control

- Heat pump 2-stage or Hybrid Heat 3-stage heat / 2-stage cooling with humidity control
- Humidity display
- Humidify output for direct control of humidifier
- Dehumidify output for variable-speed blowers
- Hybrid Heat compatible

* = notation while supplies last

** ExP accessory (expansion port and memory card) sold separately

*** Requires ExP accessory

Deluxe Thermostats



Carrier® Performance™ TP-NAC01-A, TP-NHP01A, TP-NRH01-B, TP-PAC01-A, TP-PHP01A, TP-PRH01-A*, TP-PRH01-B

Bryant® Preferred™ T6-NRH01-B, T6-NHP01-A, T6-PHP01-A, T6-PRH01-B

Totaline® Premier P730-11NAC*, P730-11PAC*, P730-32NRH-01*, P730-32PHP*, P730-32PRH*

Specifications

Physical Characteristics

Programmable Thermostat

- Dimensions: 5.2"H x 5.2"W x 1.3"D
- Battery Backup

Non-Programmable Thermostat

- Dimensions: 5.2"H x 5.2"W x 1.3"D

Electrical

- Input volts/amps: 24VAC, 3 VA, RC/RH compatible

Environment

- Operating temperature/Relative humidity: 32°F (0°C) to 104°F (40°C), 95% RH non-condensing
- Storage temperature/Relative humidity: -40°F (-40°C) to 134°F (57°C), 95% RH non-condensing

Wiring Requirements

Standard 18 to 22 gauge, local wiring codes supercede.

Deluxe Thermostat Model Comparison

Brand	Ordering Model Number	Programmable	Non-Programmable	Equipment Type		
				AC	HP	RH
Carrier	TP-NAC01-A	-	X	X	-	-
Carrier	TP-NHP01-A	-	X	-	X	-
Carrier	TP-NRH01-A	-	X	-	-	X
Carrier	TP-PAC01-A	X	-	X	-	-
Carrier	TP-PHP01-A	X	-	-	X	-
Carrier	TP-PRH01-A*, -B	X	-	-	-	X
Bryant	T6-NHP01-A	-	X	-	X	-
Bryant	T6-NRH01-A	-	X	-	-	X
Bryant	T6-PHP01-A	X	-	-	X	-
Bryant	T6-PRH01-A	X	-	-	-	X
Totaline	P730-11NAC*	-	X	X	-	-
Totaline	P730-11PAC*	X	-	X	-	-
Totaline	P730-32NRH-01*	-	X	-	-	X
Totaline	P730-32PHP*	X	-	X	X	X
Totaline	P730-32PRH*	X	-	-	-	X

AC = Air Conditioning

HP = Heat Pump

RH = Relative Humidity

* = notation while supplies last

Parts and Accessories

- TSTATXXSEN01-RC† — Outdoor air temperature sensor
- TP-EXP — ExP Expansion Memory Port
- TX-LBP01 — Large decorative backplate for TP, T6 and P730 series

- TX-2WR05 — 2-wire harness
- ZONECC0RRS01 — Remote room temperature sensor

† The outdoor air temperature sensor must be used with the Thermidstat control in a Hybrid Heat system.

Wi-Fi® Thermostats



Totaline® Premier EZ3-Wi43



Wi-Fi Thermostat with App

With the EZ3 Wi-Fi® Thermostat you get it all top-tier thermostat features – and it's easy to install, set-up and use. The EZ3 is a win for you, and a win for your customer.

Features

- Vibrant full-color 2.75" LCD display with touch/swipe/scroll
- Configurable Backlighting
- State-of-the art Wi-Fi® chipsets for fast & reliable connection speeds
- Easy to configure home Wi-Fi® Network from mobile app
- Convenient programming on Mobile device using App
- Secure network on the cloud
- Remote Access, Connectivity(Cloud)
- Innovative tool-free connector technology
- Simple color-coded connections
- Stages: Up to 4 Heat / 3 Cool Conventional
- 7 Day Programming
- Programmable fan and humidity control
- Dual fuel application
- Back plate and remote sensor pigtail included
- Energy Star Default Program Schedule
- Supports over-the-air software upgrades
- Settings retention without batteries
- Smart Recovery
- Programmable Fan
- Humidity Sensor
- Humidification Control
- De Humidification Control
- Remote Sensing Capability
- Keypad Lockout
- Outside Temperature Displays
- Demand Response Capability
- Dual Fuel
- On Screen Dealer Info

Specifications

Physical Characteristics

- Dimensions: 2.5"H x 3.5"W x 1"D

Electrical

- Input volts/amps: 18 to 30 VAC, RC/RH compatible

Environment

- Operating temperature:
Heat 50°F (10°C) to 88°F (32°C),
Cool 52°F (11°C) to 90°F (33°C),

Wiring Requirements

Standard 18 to 22 gauge, local wiring codes supercede.

Parts and Accessories

- Backplate and adapter - part number 907-01540-1-R
- Outdoor temperature sensor assembly - part number TSTATXXSEN01-RC
- Remote room indoor sensor - part number SYSTXIIRS01-RC
- 4 to 5 Wire conversion Kit (10-pack) - part number TSTATXXCNV

