

**24VNA9 Infinity® 19VS
Variable Speed Air Conditioner
with Puron® Refrigerant
1 – 5 Tons**



Product Data



INFINITY® 19VS

The Infinity 19VS air conditioner offers high-efficiency variable speed performance in a remarkably small cabinet and provides up to 19 SEER cooling efficiency. The variable speed inverter capacity control delivers up to 5 stages of operation for exceptional load matching, dehumidification and zoning performance.

This product has been designed and manufactured to provide flexible system matching and work with a wide variety of indoor units and controls.

NOTE: Ratings contained in this document are subject to change at any time. Always refer to the AHRI directory (www.ahridirectory.org) for the most up-to-date ratings information.

INDUSTRY LEADING FEATURES / BENEFITS

Energy Efficiency

- Up to 19 SEER / 13 EER
- Microtube Technology™ refrigeration system

Sound

- Sound level as low as 55 dBA in low speed (Silencer System II).
- Soft start and smooth ramp to operating speeds

Comfort

- Variable speed compressor operates at 5 stages with capacity range from as wide as 25-100%
- Air cooled Inverter variable speed drive
 - System requires Infinity Touch Control with version 11 software or newer for 5 stage operation on sizes 24 - 60 and version 12 or higher on size 13.
 - Ratings provided with 2-stage thermostats and suitable non-communicating indoor products for 2-stage operation.

Reliability

- Puron® refrigerant - environmentally sound, won't deplete the ozone layer and low lifetime service cost.
- Front-seating service valves
- Inverter control drives compressor and fan motor
- No control module attached to fan motor
- Infinity intelligence monitors critical system parameters
- Pressure equalizer valve for easy compressor starting
- High pressure switch
- Suction pressure transducer
- Compressor discharge temperature sensor
- Suction temperature sensor
- Filter drier (field installed)
- Internal crankcase heater standard

Flexibility and installation:

- 2 control wires to outdoor unit in complete Infinity system and Touch Control
- Energy Tracking capability with the Infinity Touch Control (Energy Tracking has the ability to monitor and estimate the energy consumption of your Infinity system.)
- Smaller and lighter than 2-stage units
- Minimum and Maximum adjustments with Infinity Touch Control
- Compatible with non-communicating thermostats

Durability

WeatherArmor Ultra™ protection package:

- Solid, Durable sheet metal construction
- Steel louver coil guard
- Baked-on, complete outer coverage, powder paint

Applications

- Line sets up to 100 ft (30.5 m) equivalent length
- No long-line accessories required.

MODEL NUMBER NOMENCLATURE

1 N	2 N	3 A	4 A	5 A/N	6 N	7 N	8 N	9 A/N	10 A/N	11 A/N	12 N	13 N
2	4	V	N	A	9	3	6	A	0	0	3	0
Product Series	Product Family	Tier	Major Series	SEER	Cooling Capacity	Variations	Open	Open	Voltage	Minor Series		
24 = AC	V = VS HP	N = Infinity Series	A = Puron	9 = 19 SEER	1,000 Btuh (nominal)	A = Standard B = Design Variation	0 = Not Defined	0 = Not Defined	3 = 208/230-1	0, 1, 2...		



STANDARD FEATURES

FEATURES	Unit Size – Voltage, Series							
	13	24A 24B	25	36	37	48	49	60
Puron Refrigerant	X	X	X	X	X	X	X	X
Variable Speed Rotary Compressor	X	X	X	X	X	X	X	X
Air – Cooled Integrated Inverter Drive	X	X	X	X	X	X	X	X
Louvered Coil Guard	X	X	X	X	X	X	X	X
Field Installed Filter Drier	X	X	X	X	X	X	X	X
Front Seating Service Valves	X	X	X	X	X	X	X	X
Internal Pressure and Temperature Protection	X	X	X	X	X	X	X	X
Suction Pressure Transducer	X	X	X	X	X	X	X	X
High Pressure Switch	X	X	X	X	X	X	X	X
Internal Crankcase Heater	X	X	X	X	X	X	X	X
Enhanced Diagnostics with Infinity Touch™ Control (version 11 software or newer for 5 stage operation on sizes 24 – 60 and version 12 or higher on size 13.)	X	X	X	X	X	X	X	X
Deluxe Sound Blanket	X	X	X	X	X	X	X	X
Outdoor Air Temperature Sensor	X	X	X	X	X	X	X	X

X = Standard

PHYSICAL DATA

UNIT SIZE SERIES	13–30	24A–30	24B–30	25–30	36–30	37–30	48–30	49–30	60–30
Compressor Type	Variable Speed Rotary								
REFRIGERANT	Puron® (R–410A)								
Control	TXV (Puron® Hard Shutoff)								
Charge lb (kg)	4.6 (2.09)	5.5 (2.50)	4.80 (2.18)	5.5 (2.50)	6.0 (2.72)	7.5 (3.40)	7.5 (3.40)	9.6 (4.35)	8.30 (3.76)
COND FAN	Forward Swept Propeller Type, Direct Drive								
Air Discharge	Vertical								
Air Qty (CFM)	1600	2500	2500	2500	2500	4500	4500	4800	4500
Motor HP	1/5	1/3	1/5	1/3	1/3	1/3	1/3	1/3	1/3
Motor RPM	650	1050	825	1050	1050	850	850	850	900
COND COIL									
Face Area (Sq ft)	11.12	13.90	11.12	13.90	13.90	21.50	21.50	27.53	23.65
Fins per In.	20	20	20	20	20	20	20	25	20
Rows	1	1	1	1	1	1	1	1	1
Circuits	6	6	5	6	6	8	8	8	8
VALVE CONNECT. (In. ID)									
Vapor	5/8	3/4	5/8	3/4	3/4	7/8	7/8	7/8	7/8
Liquid	3/8								
REFRIGERANT TUBES (In. OD)									
Rated Vapor*	3/4	7/8	3/4	7/8	7/8	1–1/8	1–1/8	1–1/8	1–1/8
Max Liquid Line	3/8								

* Units are rated with 25 ft (7.6 m) of lineset length. See Vapor Line Sizing and Cooling Capacity Loss table when using other sizes and lengths of lineset.

Note: See unit Installation Instruction for proper installation.

REFRIGERANT PIPING LENGTH LIMITATIONS

Maximum Line Lengths:

The maximum allowable total equivalent length for air conditioners can vary depending on the vertical separation. See the tables below for allowable lengths depending on whether the outdoor unit is on the same level, above or below the outdoor unit.

Maximum Line Lengths for Air Conditioner Applications

	MAXIMUM ACTUAL LENGTH ft (m)	MAXIMUM EQUIVALENT LENGTH† ft (m)	MAXIMUM VERTICAL SEPARA- TION ft (m)
Units on equal level	100 (30.5)	100 (30.5)	N/A
Outdoor unit ABOVE indoor unit	100 (30.5)	100 (30.5)	100 (30.5)
Outdoor unit BELOW indoor unit	See Table 'Maximum Total Equivalent Length: Outdoor Unit BELOW Indoor Unit'		

† Total equivalent length accounts for losses due to elbows or fitting. See the Long Line Guideline for details.

Maximum Total Equivalent Length† - Outdoor Unit BELOW Indoor Unit

Size	Liquid Line Diameter w/ TXV	AC with Puron® Refrigerant – Maximum Total Equivalent Length† Vertical Separation ft (m) Outdoor unit BELOW indoor unit;						
		0–20 (0 – 6.1)	21–30 (6.4 – 9.1)	31–40 (9.4 – 12.2)	41–50 (12.5 – 15.2)	51–60 (15.5 – 18.3)	61–70 (18.6 – 21.3)	71–80 (21.6 – 24.4)
1–Ton	3/8	100*	100*	100*	100*	100*	100*	100*
2–Ton	3/8	100*	100*	100*	100*	100*	100*	100*
3–Ton	3/8	100*	100*	100*	100*	100*	100*	100*
4–Ton	3/8	100*	100*	100*	100*	100	100	--
5–Ton	3/8	100*	100*	100*	100*	100	100	--

* Maximum actual length not to exceed 100 ft (30.5 m)

† Total equivalent length accounts for losses due to elbows or fitting.

-- = outside acceptable range

LONG LINE APPLICATIONS

Unit is approved for up to 100 ft (30.5 m) equivalent length and vertical separations shown above with no additional accessories. Longer line set applications are not permitted.

COOLING CAPACITY LOSS TABLE

Nominal Size (Btuh)	Line OD (in.)	24VNA9 Cooling Capacity Loss (%)				
		Total Equivalent Line Length (ft)				
		25	50	75	80	100
13	5/8	0.5	1.2	1.8	1.9	2.4
	3/4	0.1	0.4	0.6	0.7	0.8
24B	5/8	0.5	1.2	1.8	1.9	2.4
	3/4	0.1	0.4	0.6	0.7	0.8
24A 25	5/8	0.5	1.2	1.8	1.9	2.4
	3/4	0.1	0.4	0.6	0.7	0.8
	7/8	0.0	0.1	0.3	0.3	0.4
36 37	5/8	1.1	2.4	3.7	4.0	5.0
	3/4	0.3	0.8	1.3	1.4	1.8
	7/8	0.0	0.3	0.5	0.6	0.8
48 49	3/4	0.7	1.6	2.4	2.6	3.2
	7/8	0.3	0.7	1.1	1.2	1.6
	1 1/8	0.0	0.1	0.2	0.3	0.4
60	3/4	1.0	2.3	3.5	3.8	4.8
	7/8	0.4	1.0	1.7	1.8	2.3
	1 1/8	0.0	0.1	0.3	0.4	0.5

Rating Line Size in **BOLD**

MIN/MAX AIRFLOW TABLES

The indoor airflow delivered by this system varies significantly based on outdoor temperature, indoor unit combination, and system demand. The airflows on these tables are for duct design considerations. Duct systems capable of these ranges will ensure

the system will deliver full capacity at all outdoor temperatures. Minimum and maximum airflows can be adjusted from these numbers in the Infinity Control Setup screen.

Cooling – Comfort Mode			Minimum Cooling (Dehum or Zoning)
Size	Max Stage 5 Airflow	Max Stage 1 Airflow	
1 – Ton	420	300	300
2 – Ton	739	263	222
3 – Ton	990	289	236
4 – Ton	1389	542	457
5 – Ton	1600	700	600

Cooling – Efficiency Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
1 – Ton	420	300
2 – Ton	825	585
3 – Ton	1050	600
4 – Ton	1400	875
5 – Ton	1800	975

Cooling Max Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
1 – Ton (550 cfm/ delivered ton)	780	434
2 – Ton (24)	850	585
2 – Ton (25) (550 cfm/ delivered ton)*	1350	510
3 – Ton	1200	600
4 – Ton	1600	875
4 – Ton – 49	1450	875
5 – Ton	2000	975

* Serial number beginning with 0115E and newer

LEGEND::

Max Capacity Airflow – Stage 5 airflow varies depending on conditions. This is the highest airflow the system will attempt to deliver in this particular mode. Ductwork for non-zoned systems should be sized for this airflow to ensure the system can deliver full capacity when needed. Improper duct design may result in excessive airflow noise and/or cutback occurrences at max airflow conditions.

Highest Min. Capacity Airflow – Stage 1 airflow also varies depending on conditions. In zoned systems, each zone must be capable of delivering this airflow for the system to deliver full capacity into the zone. Otherwise, airflow may be diverted to other zones or cutback may occur.

Min Cooling (Dehum or Zoning) – Lowest airflow the system will deliver. May operate down to this airflow in dehumidification mode or in zoning applications where ductwork restrictions have caused the blower to cut-back.

ELECTRICAL DATA

UNIT SIZE – VOLTAGE, SERIES	V/PH	OPER VOLTS*		COMPR		FAN	MCA	MAX FUSE ** or CKT BRK AMPS
		MAX	MIN	LRA	RLA	FLA		
13 – 30	208 – 230 – 1	253	197	N/A	10.3	0.58	13.5	20
24A – 30				N/A	17.7	1.20	23.6	40
24B – 30				N/A	10.3	0.58	13.5	20
25 – 30				N/A	17.7	1.20	23.6	40
36 – 30				N/A	18.4	1.20	24.2	40
37 – 30				N/A	19.6	1.20	26.0	40
48 – 30				N/A	20.9	1.20	27.3	40
49 – 30				N/A	19.6	1.40	26.0	40
60 – 30				N/A	30.9	1.40	40.0	60

* Permissible limits of the voltage range at which the unit will operate satisfactorily

** Time – Delay fuse.

FLA – Full Load Amps

LRA – Locked Rotor Amps

MCA – Minimum Circuit Amps

RLA – Rated Load Amps

NOTE: Control circuit is 24 – V on all units and requires external power source. Copper wire must be used from service disconnect to unit.

All motors/compressors contain internal overload protection.

Complies with 2010 requirements of ASHRAE Standards 90.1

CHARGING SUBCOOLING (TXV-TYPE EXPANSION DEVICE)

UNIT SIZE – VOLTAGE, SERIES	If a Touch Control is installed, subcooling recommendation displayed in Charging Mode must be followed. If not, subcooling chart shown on the charging label must be followed
13 – 30	
24A – 30, 24B – 30	
25 – 30	
36 – 30	
37 – 30	
48 – 30	
49 – 30	
60 – 30	

RPM-CAPACITY-SOUND (dBA)*

STAGE #	COMP RPM	CAPACITY %	SOUND (dBA)
24VNA913			
1	1500	58%	58
2	1867	72%	59
3	2100	81%	59
4	2350	90%	59
5	2600	100%	60
24VNA924A			
1	1200	36%	56
2	1900	58%	61
3	2400	73%	64
4	2600	79%	68
5	3300	100%	71
24VNA924B			
1	1500	35%	55
2	2566	56%	60
3	3150	69%	65
4	3950	87%	66
5	4700	100%	68
24VNA925			
1	1200	36%	56
2	1900	58%	61
3	2400	73%	63
4	2600	79%	67
5	3300	100%	69
24VNA936			
1	1200	25%	56
2	2400	50%	61
3	3300	69%	65
4	4200	88%	69
5	4800	100%	71
24VNA937			
1	1200	40%	56
2	1800	60%	63
3	2200	73%	67
4	2600	87%	67
5	3000	100%	68
24VNA948			
1	1500	35%	62
2	2460	57%	65
3	2800	65%	67
4	3650	84%	70
5	4320	100%	72
24VNA949			
1	1200	38%	57
2	1840	59%	62
3	2300	74%	66
4	2700	87%	68
5	3120	100%	69
24VNA960			
1	1200	32%	57
2	2180	55%	61
3	2850	70%	64
4	3700	90%	70
5	4140	100%	72

*Estimated sound for stages 2, 3, and 4
For 2-stage operation: Low = Stage 2, High = Stage 5

SOUND POWER LEVEL (dBA)

Unit Size – Voltage, Series	Typical Octave Band Spectrum (without tone adjustment)	Min Speed Cooling	Max Speed Cooling
13 – 30	Freq (Hz)	1500	2600
	125	46.5	46.5
	250	50.5	54.0
	500	52.0	53.5
	1000	50.0	51.0
	2000	47.0	47.5
	4000	40.5	47.0
	8000	45.5	45.0
	Sound Rating (dBA)	58	60
24A – 30	Freq (Hz)	1200 RPM	3300 RPM
	125	40.4	43.9
	250	44.4	53.9
	500	46.3	61.8
	1000	45.0	59.0
	2000	37.2	56.7
	4000	31.0	60.0
	8000	28.4	45.4
	Sound Rating (dBA)	56	71
24B – 30	Freq (Hz)	1500 RPM	4700 RPM
	125	40.5	44.0
	250	45.5	49.5
	500	41.5	53.0
	1000	44.0	52.5
	2000	39.0	50.5
	4000	34.5	53.0
	8000	31.0	45.0
	Sound Rating (dBA)	55	67
25 – 30	Freq (Hz)	1200 RPM	3300 RPM
	125	40.4	45.4
	250	44.4	57.9
	500	46.3	61.3
	1000	45.0	58.0
	2000	37.2	54.7
	4000	31.0	52.0
	8000	28.4	41.9
	Sound Rating (dBA)	56	69
36 – 30	Freq (Hz)	1200 RPM	4800 RPM
	125	40.4	43.9
	250	44.4	53.9
	500	46.3	61.8
	1000	45.0	59.0
	2000	37.2	56.7
	4000	31.0	60.0
	8000	28.4	45.4
	Sound Rating (dBA)	56	71
37 – 30	Freq (Hz)	1200	3000
	125	45.0	54.5
	250	48.5	59.0
	500	50.5	63.0
	1000	50.0	60.5
	2000	44.0	59.5
	4000	37.5	57.5
	8000	44.5	52.0
	Sound Rating (dBA)	56	68
48 – 30	Freq (Hz)	1500 RPM	4320 RPM
	125	40.9	42.4
	250	46.4	54.4
	500	47.3	60.3
	1000	56.5	63.5
	2000	39.2	56.7
	4000	35.0	56.0
	8000	31.9	44.9
	Sound Rating (dBA)	62	72
49 – 30	Freq (Hz)	1200	3120
	125	44.5	52.0
	250	48.5	63.0
	500	50.5	63.5
	1000	51.5	67.5
	2000	47.5	61.5
	4000	43.5	58.5
	8000	47.5	54.5
	Sound Rating (dBA)	57	69.0
60 – 30	Freq (Hz)	1200 RPM	4140 RPM
	125	39.0	49.5
	250	48.0	59.5
	500	46.5	62.0
	1000	45.5	60.0
	2000	39.5	58.5
	4000	36.5	55.0
	8000	35.5	48.0
	Sound Rating (dBA)	57	72

NOTE: Tested in compliance with AHRI 270–2008 but not listed with AHRI.

ACCESSORIES

KIT NUMBER	KIT NAME	13-30	24A-30 24B-30	25-30	36-30	37-30	48-30	49-30	60
KSASF0101AAA	SPRT FEET KIT					X	X	X	X
KSASF0201AAA	SPRT FEET KIT	X	X	X	X	X			
KSATX0201PUR	TXV KIT	X	X	X					
KSATX0301PUR	TXV KIT				X	X			
KSATX0401PUR	TXV KIT						X	X	
KSATX0501PUR	TXV KIT								X
KSBTX0201PUR	TXV KIT	X	X	X					
KSBTX0301PUR	TXV KIT				X	X			
KSBTX0401PUR	TXV KIT						X	X	
LM10KK003	VAPOR LINE MUFFLER	X	X	X	X	X	X	X	X

x = Accessory

Accessory Description and Usage

Support Feet

Raises unit above base pad. 2 and 3 ton kit contains 5 feet for stable installation with small base. 4 and 5 ton kit contains 4 feet.

Usage Guideline:

Recommended for rooftop applications

Thermostatic Expansion Valve (TXV)

A modulating flow-control valve which meters refrigerant liquid flow rate into the evaporator in response to the superheat of the refrigerant gas leaving the evaporator.

Usage Guideline:

Required if indoor unit does not already contain Puron® refrigerant TXV

Vapor Line Muffler

An external muffler installed in the vapor line to minimize vibration transmitted through refrigerant lines

Usage Guideline:

Recommended if vapor line is not installed per recommendations in the installation instructions and vibration may be transmitted into the structure.

CONTROLS

SYSTXCCITN01-A	Infinity Touch Control (non-Wi-Fi) (version 11 software or newer for 5 stage operation on sizes 24 – 60 and version 12 or higher on size 13.)
SYSTXCCITC01-A	Infinity Touch Control (Wi-Fi) (version 11 software or newer for 5 stage operation on sizes 24 – 60 and version 12 or higher on size 13.)
SYSTXCCITW01-A	Infinity Touch Control with Wi-Fi & Wireless Access Point
SYSTXCC4ZC01	Infinity 4-Zone Damper Control Module
SYSTXCCSMS01	Infinity Smart Sensor (Optional wall control used to monitor temperature and/or fan control in an individual zone.)
SYSTXCCNIM01	Infinity Network Interface Module (Connects Heat Recovery and Energy Recovery Ventilators on non-zoning applications.)
SYSTXCCSMS01	Infinity Smart Sensor

THERMOSTATS


PART NUMBER	PROGRAM	GAS	ELECTRIC	HEAT	COOL
TP-PAC01	7-Day	√	√	1	1
TP-NRH01-A	NP	√	√	3	2
TP-NAC01	NP	√	√	1	1

DIMENSIONS - ENGLISH

UNIT	SERIES	ELECTRICAL CHARACTERISTICS	A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (lbs)	SHIPPING WEIGHT (lbs)	SHIPPING DIMENSIONS (L x W x H)
24VWA913A	0	X	0	0	0	0	0	0	0	0	0	0	0	0	135	158	25 1/4" x 25 1/4" x 35 5/8"
24VWA924A	0	X	0	0	0	0	0	0	0	0	0	0	0	0	160	186	25 1/4" x 25 1/4" x 43 3/8"
24VWA924B	0	X	0	0	0	0	0	0	0	0	0	0	0	0	135	158	25 1/4" x 25 1/4" x 35 5/8"
24VWA925A	0	X	0	0	0	0	0	0	0	0	0	0	0	0	160	186	25 1/4" x 25 1/4" x 43 3/8"
24VWA936A	0	X	0	0	0	0	0	0	0	0	0	0	0	0	160	186	25 1/4" x 25 1/4" x 43 3/8"
24VWA937A	0	X	0	0	0	0	0	0	0	0	0	0	0	0	216	255	33 3/8" x 33 3/8" x 46 1/8"
24VWA948A	0	X	0	0	0	0	0	0	0	0	0	0	0	0	216	255	33 3/8" x 33 3/8" x 46 1/8"
24VWA949A	0	X	0	0	0	0	0	0	0	0	0	0	0	0	262	300	36 1/8" x 39 1/4" x 50 3/16"
24VWA960A	0	X	0	0	0	0	0	0	0	0	0	0	0	0	241	282	33 3/8" x 33 3/8" x 49 9/16"

460-3-60
208/230-3-60
230-1-60
208-230-1-60

X = YES
O = NO

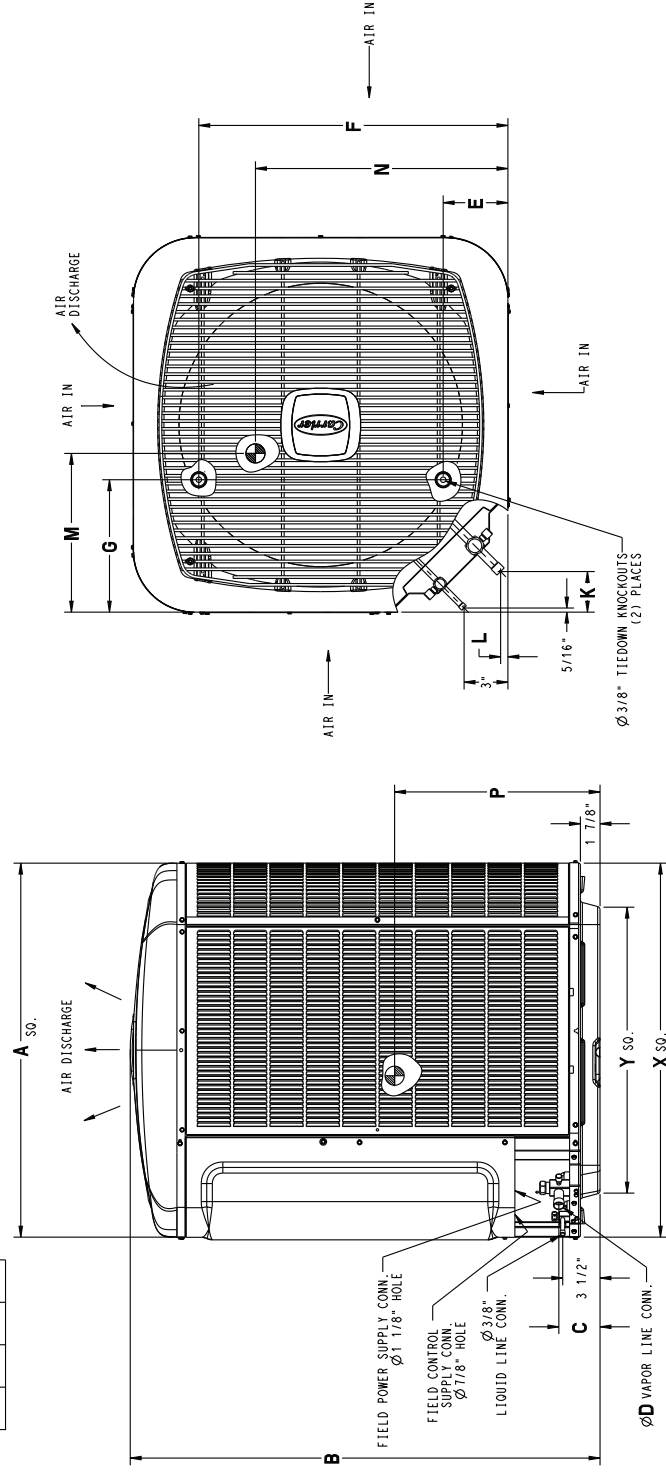

When installing, allow sufficient space for airflow clearance, wiring, refrigerant piping, and service. Allow 24 in. (609.6 mm) clearance to service end of unit and 48 in. (1219.2 mm) (above unit, for proper airflow, a 6-in. (152.4 mm) clearance on 1 side of unit and 12-in. (304.8 mm) on all remaining sides must be maintained. Maintain a distance of 24 in. (609.6 mm) between units or 18 in. (457.2 mm) if no overhang within 12 ft. (3.66 m) Position so water, snow, or ice from roof or eaves cannot fall directly on unit.

NOTE: 18" (457.2 mm) clearance option described above is approved for outdoor units with wire grille coil guard only. Units with louver panels require 24" (609.6 mm) between units.

On rooftop applications, locate unit at least 6 in. (152.4 mm) above roof surface.


UNIT SIZE	"X" MIN GROUND MOUNTING PAD APPLICATION DIMENSIONS	"Y" MIN ROOF-TOP MOUNTING PAD APPLICATION DIMENSIONS
13, 24, 25, 36	23 1/8"	17 3/4"
-	25 3/4"	20 7/16"
37, 48, 60	31 3/16"	23"
75, 90	36"	26 3/4"

DIMENSIONS - SI

UNIT	SERIES	ELECTRICAL CHARACTERISTICS			A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (Kgs)	SHIPPING WEIGHT (Kgs)	SHIPPING DIMENSIONS (L x W x H)		
24VNA913A	0	X	0	0	587.3	803.1	96.1	19.1	112.7	458.8	198.4	71.4	12.7	285.8	285.8	368.3	61.2	71.7	641.5 X 641.5 X 905.2		
24VNA924A	0	X	0	0	587.3	975.9	96.1	19.1	112.7	458.8	198.4	71.4	12.7	273.1	273.1	463.6	72.6	84.4	641.5 X 641.5 X 1102.2		
24VNA924B	0	X	0	0	587.3	803.1	96.1	19.1	112.7	458.8	198.4	71.4	12.7	285.8	285.8	368.3	61.2	71.7	641.5 X 641.5 X 905.2		
24VNA925A	0	X	0	0	587.3	975.9	96.1	19.1	112.7	458.8	198.4	71.4	12.7	273.1	273.1	463.6	72.6	84.4	641.5 X 641.5 X 1102.2		
24VNA936A	0	X	0	0	587.3	975.9	96.1	19.1	112.7	458.8	198.4	71.4	12.7	273.1	273.1	463.6	72.6	84.4	641.5 X 641.5 X 1102.2		
24VNA937A	0	X	0	0	792.2	1010.3	98.4	22.2	166.7	627.1	231.8	74.6	15.9	368.3	371.5	476.3	98.0	115.7	846.6 X 846.6 X 1172.2		
24VNA948A	0	X	0	0	792.2	1010.3	98.4	22.2	166.7	627.1	231.8	74.6	15.9	368.3	371.5	476.3	98.0	115.7	846.6 X 846.6 X 1172.2		
24VNA949A	0	X	0	0	889.0	1117.6	98.4	22.2	166.7	722.3	231.8	74.6	15.9	412.8	412.8	520.7	118.8	136.1	917.6 X 997.0 X 1274.8		
24VNA960A	0	X	0	0	792.2	1096.7	98.4	22.2	166.7	627.1	231.8	74.6	15.9	419.1	381.0	508.0	109.3	127.9	846.6 X 846.6 X 1258.6		

208-230-160	230-160	208/230-3-60	460-3-60
-------------	---------	--------------	----------

X = YES
0 = NO

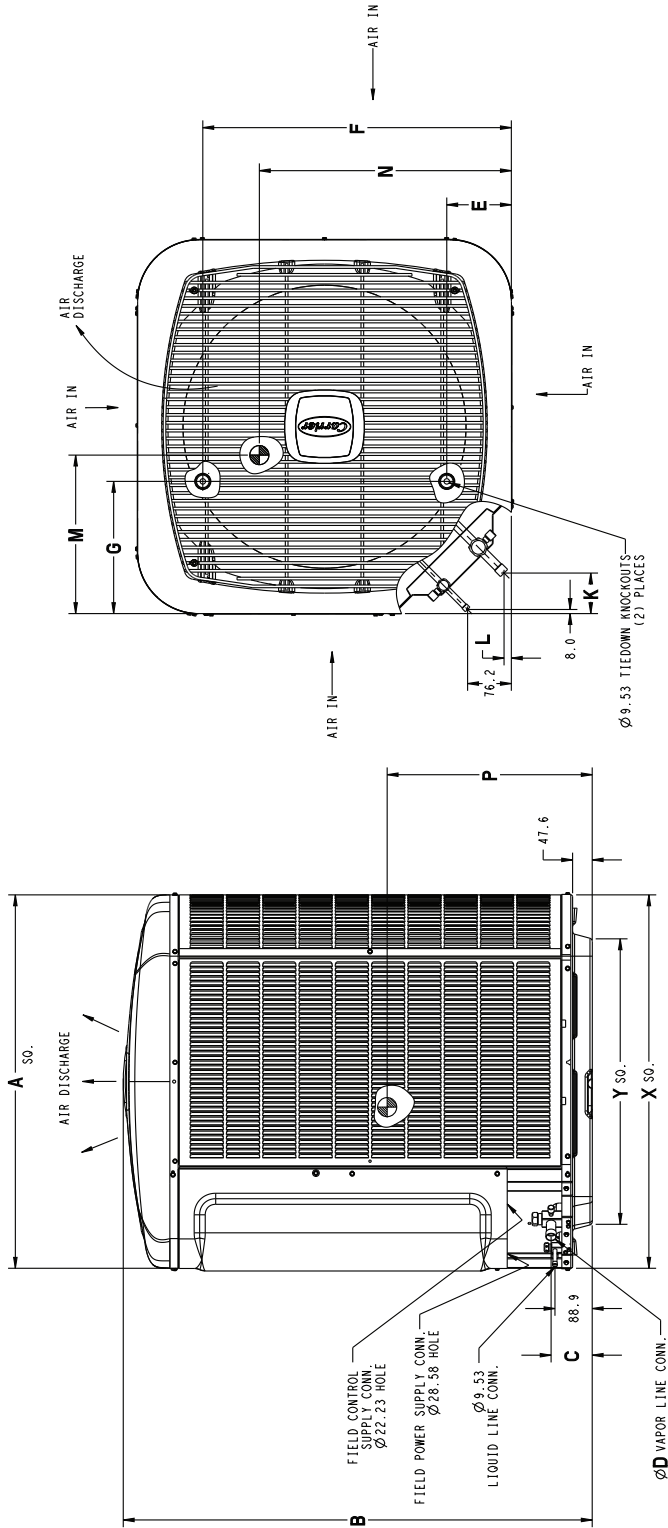

UNIT SIZE	X MIN GROUND MOUNTING PAD APPLICATION DIMENSIONS	Y MIN ROOF-TOP MOUNTING PAD APPLICATION DIMENSIONS
13, 24, 25, 36	587.4	451.3
-	634.0	518.5
37, 48, 60	792.2	583.2
49	889.0	679.7

When installing, allow sufficient space for airflow clearance, wiring, refrigerant piping, and service. Allow 24 in. (609.6 mm) clearance to service end of unit and 48 in. (1219.2 mm) (above unit. For proper airflow, a 6-in. (152.4 mm) clearance on 1 side of unit and 12-in. (304.8 mm) on all remaining sides must be maintained. Maintain a distance of 24 in. (609.6 mm) between units or 18 in. (457.2 mm) if no overhang within 12 ft. (3.66 m) Position so water, snow, or ice from roof or eaves cannot fall directly on unit.

NOTE: 18" (457.2 mm) clearance option described above is approved for outdoor units with wire grille coil guard only. Units with lower panels require 24" (609.6 mm) between units.

On rooftop applications, locate unit at least 6 in. (152.4 mm) above roof surface.

TESTED AHRI COMBINATION RATINGS*

NOTE: Ratings contained in this document are subject to change at any time.

For AHRI ratings certificates, please refer to the AHRI directory www.ahridirectory.org

Additional ratings and system combinations can be accessed via the Carrier database at: www.MyCarrierRatings.com

For performance data at specific application &/or design conditions with various indoor unit combinations, the equipment performance calculator can be accessed at : <http://rpmob.wrightsoft.com/>

Model Number	Coil Model Number	Furnace Model Number	Cooling Capacity High	SEER	EER	ID CFM
24VNA913A**30	FE4ANF002L+UI		12800	17.0	13.0	420
24VNA924A**30	FE4AN(B,F)005L+UI		23000	18.0	11.0	825
24VNA924A**30	FV4CN(B,F)003L		22600	16.0	11.0	700
24VNA924B**30	FE4ANF002L+UI		24000	18.0	11.0	825
24VNA924B**30	FV4CNF002L		23800	16.0	11.0	700
24VNA925A**30	FE4AN(B,F)005L+UI		24000	19.0	12.5	825
24VNA925A**30	FV4CN(B,F)003L		22600	19.0	12.2	700
24VNA936A**30	FE4AN(B,F)005L+UI		35000	18.0	10.5	1050
24VNA936A**30	FV4CN(B,F)005L		35000	16.0	10.5	1050
24VNA937A**30	FE4ANB006L+UI		33600	19.0	13.0	1050
24VNA948A**30	FE4ANB006L+UI		46500	19.0	11.0	1400
24VNA948A**30	FV4CNB006L		46000	15.5	11.0	1400
24VNA949A**30	CNPV*6024AL	58CV(A,X)155-22+UL	44500	19.0	12.5	1200
24VNA960A**30	FE4ANB006L+UI		57000	17.0	10.0	1600
24VNA960A**30	FV4CNB006L		57500	15.0	10.0	1750

* Ratings are net values reflecting the effects of circulating fan heat. Supplemental electric heat is not included. Ratings are based on:

Cooling Standard: 80°F (27°C) db 67°F (19°C) wb indoor entering air temperature and 95°F (35°C) db air entering outdoor unit.

EER — Energy Efficiency Ratio

SEER — Seasonal Energy Efficiency Ratio

UI — User Interface

NOTE: Ratings contained in this document are subject to change at any time.

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE

EDB °F (°C)	EVP. AIR	24VNA913 / FEANF02L Efficiency Mode Condenser Entering Air Temperature °F (°C)																							
		115 (48.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**				
75 (23.9)	72 (22.2) 67 (19.4) 63 (17.2) 57 (13.9)	420	12.59	5.26	1.36	13.48	5.59	1.17	14.21	5.86	0.98	15.07	6.18	0.81	15.92	6.51	0.65	16.76	6.83	0.50					
			11.37	7.16	1.35	12.17	7.50	1.17	13.61	8.13	0.82	14.37	8.46	0.67	15.11	8.79	0.53								
			10.47	8.64	1.34	11.21	8.99	1.17	11.83	9.30	0.99	12.53	9.64	0.83	13.22	9.98	0.69	13.89	10.32	0.56					
			9.83	9.83	1.34	10.40	10.40	1.17	10.89	10.89	0.99	11.42	11.42	0.84	11.93	11.93	0.71	12.42	12.42	0.59					
			12.55	7.18	1.36	13.44	7.52	1.17	14.16	7.81	0.98	15.02	8.15	0.81	15.87	8.49	0.65	16.71	8.83	0.50					
80 (26.7)	67 (19.4) 63 (17.2) 57 (13.9)	420	11.34	9.04	1.35	12.13	9.40	1.17	12.80	9.71	0.98	13.57	10.07	0.82	14.33	10.42	0.67	15.07	10.76	0.53					
			10.52	10.47	1.35	11.23	10.87	1.17	11.84	11.20	0.99	12.54	11.57	0.83	13.22	11.93	0.69	13.88	12.28	0.56					
			10.48	10.48	1.34	11.08	11.08	1.17	11.59	11.59	0.99	12.16	12.16	0.83	12.70	12.70	0.70	13.22	13.22	0.57					
75 (23.9)	67 (19.4) 63 (17.2) 57 (13.9)	300	10.14	4.18	1.01	10.85	4.45	0.90	12.12	5.12	0.77	12.91	5.41	0.66	13.68	5.70	0.54	14.43	5.98	0.42					
			9.12	5.54	1.01	9.75	5.82	0.91	10.91	7.08	0.79	11.61	7.38	0.68	12.29	7.68	0.57	12.95	7.97	0.47					
			8.38	6.62	1.01	8.96	6.90	0.91	10.04	8.60	0.79	10.67	8.92	0.69	11.28	9.23	0.60	11.88	9.53	0.50					
			7.73	7.73	1.00	8.17	8.17	0.92	9.57	9.57	0.80	10.07	10.07	0.70	10.54	10.54	0.61	11.01	11.01	0.52					
			10.10	5.57	1.01	10.82	5.86	0.90	12.07	7.11	0.77	12.86	7.42	0.66	13.63	7.73	0.54	14.38	8.03	0.42					
80 (26.7)	67 (19.4) 63 (17.2) 57 (13.9)	300	9.09	6.92	1.01	9.73	7.22	0.91	10.89	9.03	0.79	11.58	9.36	0.68	12.25	9.68	0.57	12.91	9.99	0.47					
			8.39	7.99	1.01	8.97	8.29	0.91	10.24	10.24	0.79	10.78	10.78	0.69	11.34	11.19	0.59	11.92	11.53	0.50					
			8.23	8.23	1.01	8.70	8.70	0.91	10.23	10.23	0.79	10.75	10.75	0.69	11.26	11.26	0.60	11.76	11.76	0.50					
75 (23.9)	67 (19.4) 63 (17.2) 57 (13.9)	200	8.50	3.45	0.83	9.09	3.68	0.77	8.44	3.60	0.51	9.06	3.83	0.44	9.67	4.05	0.36	10.28	4.28	0.28					
			7.65	4.36	0.83	8.17	4.60	0.77	7.61	5.05	0.51	8.16	5.29	0.45	8.70	5.53	0.39	9.23	5.77	0.31					
			7.04	5.08	0.82	7.51	5.32	0.77	7.02	6.18	0.51	7.51	6.44	0.46	8.00	6.69	0.40	8.46	6.93	0.34					
			6.23	6.15	0.81	6.63	6.39	0.77	6.75	6.75	0.52	7.16	7.16	0.47	7.54	7.54	0.41	7.90	7.90	0.36					
			8.46	4.39	0.83	9.06	4.63	0.77	8.40	5.06	0.51	9.02	5.30	0.44	9.64	5.55	0.36	10.24	5.80	0.28					
80 (26.7)	67 (19.4) 63 (17.2) 57 (13.9)	200	7.83	5.29	0.83	8.15	5.54	0.77	7.59	6.49	0.51	8.14	6.76	0.45	8.68	7.02	0.39	9.21	7.28	0.31					
			7.03	6.01	0.82	7.49	6.26	0.77	7.23	7.23	0.51	7.66	7.66	0.46	8.08	8.08	0.40	8.50	8.42	0.33					
			6.58	6.58	0.82	6.94	6.94	0.77	7.22	7.22	0.51	7.65	7.65	0.46	8.06	8.06	0.40	8.46	8.46	0.34					

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 48

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

24VNA913

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*FE4ANF002L	1.00	1.00	
CAP**1814AL*	0.98	0.98	58CV(A.X)070-12
CAP**2414AL*	0.99	0.99	58CV(A.X)070-12
CAP**2417AL*	0.99	0.99	59*N*A060V17**14
CAP**2417AL*	0.99	0.99	59*N*A080V17**14
CNPH*2417AL*	0.99	0.99	59*N*A060V17**14
CNPH*2417AL*	0.99	0.99	59*N*A080V17**14
CNPV*2414AL*	1.00	1.00	58CV(A.X)070-12
CNPV*2417AL*	0.99	0.99	59*N*A060V17**14
CNPV*2417AL*	0.99	0.99	59*N*A080V17**14
CSPH*2412AL*	1.00	1.00	59*N*A060V17**14
CSPH*2412AL*	1.00	1.00	59*N*A080V17**14

See additional notes on page 48

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVA P AIR	24VNA924A / FE4ANF005 Efficiency Mode Condenser Entering Air Temperature °F (°C)																							
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCFM	Capacity MBtuh		Total Sys KW**	ID SCFM	Capacity MBtuh		Total Sys KW**	ID SCFM	Capacity MBtuh		Total Sys KW**	ID SCFM	Capacity MBtuh		Total Sys KW**	ID SCFM	Capacity MBtuh		Total Sys KW**	Capacity MBtuh	Sens†	Total S KW**	
Total	Sens†		Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†					Total
75 (23.9)	72 (22.2)	825	22.60	9.53	3.21	825	24.02	10.05	2.61	825	25.33	10.54	2.07	825	26.67	11.04	1.60	825	27.98	11.54	1.20	825	29.26	12.02	0.84
	67 (19.4)		20.56	13.19	3.20		21.88	13.76	2.63		23.10	14.31	2.09		24.34	14.86	1.64		25.55	15.41	1.24		26.73	15.95	0.89
	63 (17.2)		19.06	16.04	3.19		20.29	16.66	2.63		21.44	17.25	2.10		22.61	17.85	1.66		23.74	18.44	1.26		24.85	19.01	0.93
	57 (13.9)		18.10	18.10	3.18		19.09	19.09	2.63		20.04	20.04	2.11		20.97	20.97	1.67		21.89	21.89	1.29		22.78	22.78	0.96
	72 (22.2)		22.44	13.14	3.20		23.85	13.70	2.61		25.15	14.23	2.06		26.49	14.77	1.60		27.80	15.31	1.19		29.07	15.84	0.84
80 (26.7)	67 (19.4)	825	20.48	16.76	3.20	21.79	17.38	2.62	23.00	17.96	2.09	24.24	18.56	1.63	25.45	19.15	1.23	26.62	19.73	0.89					
	63 (17.2)		19.26	19.26	3.19	20.37	20.18	2.63	21.49	20.85	2.10	22.63	21.51	1.65	23.75	22.15	1.26	24.85	22.77	0.92					
	57 (13.9)		19.23	19.23	3.19	20.28	20.28	2.63	21.25	21.25	2.10	22.23	22.23	1.66	23.18	23.18	1.27	24.10	24.10	0.94					
	72 (22.2)		15.08	6.47	1.54	16.06	6.82	1.33	16.82	7.10	1.10	17.75	7.44	0.91	18.67	7.78	0.72	19.58	8.12	0.54					
	67 (19.4)		13.68	9.15	1.54	14.59	9.54	1.35	15.33	9.87	1.12	16.19	10.25	0.94	17.03	10.82	0.76	17.86	10.99	0.59					
75 (23.9)	63 (17.2)	650	12.70	11.25	1.54	13.54	11.67	1.36	14.27	12.04	1.13	15.07	12.45	0.96	15.86	12.85	0.79	16.62	13.24	0.62					
	57 (13.9)		12.27	12.27	1.54	12.97	12.97	1.37	13.58	13.58	1.14	14.24	14.24	0.97	14.89	14.89	0.81	15.52	15.52	0.65					
	72 (22.2)		14.96	9.12	1.53	15.93	9.51	1.33	16.68	9.81	1.10	17.61	10.18	0.91	18.52	10.55	0.72	19.47	10.93	0.54					
	67 (19.4)		13.64	11.78	1.54	14.54	12.20	1.35	15.27	12.55	1.12	16.13	12.96	0.94	16.96	13.36	0.76	17.78	13.76	0.59					
	63 (17.2)		13.08	13.08	1.54	13.82	13.82	1.36	14.43	14.43	1.13	15.14	15.09	0.96	15.89	15.56	0.79	16.65	15.99	0.62					
80 (26.7)	57 (13.9)	650	13.06	13.06	1.54	13.79	13.79	1.36	14.41	14.41	1.13	15.10	15.10	0.96	15.77	15.77	0.79	16.42	16.42	0.63					
	72 (22.2)		11.92	5.31	0.85	12.72	5.59	0.82	10.55	4.66	0.46	11.18	4.89	0.44	11.84	5.13	0.39	12.52	5.37	0.28					
	67 (19.4)		10.80	7.83	0.86	11.55	8.14	0.83	9.58	6.85	0.47	10.16	7.10	0.47	10.74	7.35	0.43	11.36	7.61	0.34					
	63 (17.2)		10.05	9.78	0.86	10.74	10.13	0.84	8.93	8.56	0.49	9.46	8.83	0.49	10.00	9.10	0.46	10.55	9.37	0.38					
	57 (13.9)		9.97	9.97	0.86	10.57	10.57	0.85	8.82	8.82	0.49	9.29	9.29	0.50	9.75	9.75	0.47	10.21	10.21	0.40					
75 (23.9)	72 (22.2)	650	11.80	7.81	0.85	12.59	8.12	0.82	10.41	6.81	0.46	11.06	7.06	0.44	11.73	7.32	0.38	12.41	7.59	0.28					
	67 (19.4)		10.80	10.29	0.86	11.52	10.64	0.83	9.55	8.98	0.47	10.13	9.25	0.47	10.71	9.53	0.43	11.32	9.81	0.34					
	63 (17.2)		10.66	10.66	0.86	11.28	11.28	0.84	9.40	9.40	0.48	9.89	9.89	0.48	10.37	10.37	0.44	10.87	10.87	0.36					
	57 (13.9)		10.64	10.64	0.86	11.26	11.26	0.84	9.39	9.39	0.48	9.87	9.87	0.48	10.35	10.35	0.44	10.85	10.85	0.36					
	72 (22.2)		12.52	5.37	0.28	11.84	5.13	0.39	11.84	5.13	0.39	11.84	5.13	0.39	11.84	5.13	0.39	11.84	5.37	0.28					
80 (26.7)	67 (19.4)	585	11.36	7.61	0.34	10.74	7.35	0.43	10.16	7.10	0.47	10.74	7.35	0.43	10.74	7.35	0.43	11.36	7.61	0.34					
	63 (17.2)		10.55	9.37	0.38	10.00	9.10	0.46	9.46	8.83	0.49	9.75	9.75	0.47	10.21	10.21	0.40	10.55	9.37	0.38					
	57 (13.9)		10.21	10.21	0.40	9.75	9.75	0.47	9.29	9.29	0.50	9.75	9.75	0.47	10.21	10.21	0.40	10.21	10.21	0.40					
	72 (22.2)		12.41	7.59	0.28	11.73	7.32	0.38	11.06	7.06	0.44	11.73	7.32	0.38	11.73	7.32	0.38	12.41	7.59	0.28					
	67 (19.4)		11.32	9.81	0.34	10.71	9.53	0.43	10.13	9.25	0.47	10.71	9.53	0.43	10.71	9.53	0.43	11.32	9.81	0.34					
75 (23.9)	63 (17.2)	585	10.87	10.87	0.36	10.37	10.37	0.44	9.89	9.89	0.48	10.13	9.25	0.47	10.71	9.53	0.43	11.32	9.81	0.34					
	57 (13.9)		10.85	10.85	0.36	10.35	10.35	0.44	9.87	9.87	0.48	10.35	10.35	0.44	10.35	10.35	0.44	10.87	10.87	0.36					
	72 (22.2)		12.52	5.37	0.28	11.84	5.13	0.39	11.84	5.13	0.39	11.84	5.13	0.39	11.84	5.13	0.39	12.52	5.37	0.28					
	67 (19.4)		11.36	7.61	0.34	10.74	7.35	0.43	10.16	7.10	0.47	10.74	7.35	0.43	10.74	7.35	0.43	11.36	7.61	0.34					
	63 (17.2)		10.55	9.37	0.38	10.00	9.10	0.46	9.46	8.83	0.49	9.75	9.75	0.47	10.21	10.21	0.40	10.55	9.37	0.38					
80 (26.7)	57 (13.9)	650	10.21	10.21	0.40	9.75	9.75	0.47	9.29	9.29	0.50	9.75	9.75	0.47	10.21	10.21	0.40	10.21	10.21	0.40					
	72 (22.2)		12.41	7.59	0.28	11.73	7.32	0.38	11.06	7.06	0.44	11.73	7.32	0.38	11.73	7.32	0.38	12.41	7.59	0.28					
	67 (19.4)		11.32	9.81	0.34	10.71	9.53	0.43	10.13	9.25	0.47	10.71	9.53	0.43	10.71	9.53	0.43	11.32	9.81	0.34					
	63 (17.2)		10.87	10.87	0.36	10.37	10.37	0.44	9.89	9.89	0.48	10.37	10.37	0.44	10.37	10.37	0.44	10.87	10.87	0.36					
	57 (13.9)		10.85	10.85	0.36	10.35	10.35	0.44	9.87	9.87	0.48	10.35	10.35	0.44	10.35	10.35	0.44	10.85	10.85	0.36					

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 — Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 48

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

24VNA924A

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*FE4AN(B,F)005L	1.00	1.00	
FE4AN(B,F)003L	0.96	1.00	
FE4AN(B)002L	0.98	1.08	
FE4ANF002L	0.96	1.00	
CAP**3614AL*	0.98	1.03	58CV(A,X)070-12
CNPV**3617AL*	0.98	1.08	58CV(A,X)070-12
CNPV**3617AL*	0.98	1.08	58CV(A,X)070-12
CNPV**3617AL*	0.97	1.01	58CV(A,X)070-12
CNPV**3717AL*	0.97	1.02	58CV(A,X)070-12
CNPV**4217AL*	0.96	1.00	58CV(A,X)070-12
CSPH**3612AL*	1.00	1.05	58CV(A,X)070-12
CSPH**4212AL*	1.00	1.05	58CV(A,X)070-12
CAP**3617AL*	0.98	1.03	58CV(A,X)090-16
CAP**4221AL*	0.99	1.04	58CV(A,X)090-16
CNPV**3617AL*	0.98	1.03	58CV(A,X)090-16
CNPV**4221AL*	0.98	1.04	58CV(A,X)090-16
CNPV**3617AL*	0.97	1.01	58CV(A,X)090-16
CNPV**3621AL*	0.97	1.01	58CV(A,X)090-16
CNPV**3717AL*	0.97	0.97	58CV(A,X)090-16
CNPV**4217AL*	0.96	1.00	58CV(A,X)090-16
CNPV**4217AL*	0.96	1.00	58CV(A,X)090-16
CSPH**3612AL*	1.00	1.00	58CV(A,X)090-16
CSPH**4212AL*	1.01	1.01	58CV(A,X)090-16
CAP**3617AL*	0.98	1.03	59"N*A060V17**14
CAP**3621AL*	0.98	1.03	59"N*A060V17**14
CAP**4221AL*	0.98	1.03	59"N*A060V17**14
CNPV**3617AL*	0.97	1.07	59"N*A060V17**14
CNPV**4221AL*	0.98	1.08	59"N*A060V17**14
CNPV**3617AL*	0.94	1.03	59"N*A060V17**14
CNPV**3621AL*	0.94	1.03	59"N*A060V17**14
CNPV**3717AL*	0.97	1.02	59"N*A060V17**14
CNPV**4221AL*	0.95	1.04	59"N*A060V17**14
CSPH**4212AL*	0.99	1.04	59"N*A060V17**14
CSPH**4212AL*	1.00	1.05	59"N*A060V17**14
CAP**3617AL*	0.98	1.03	59"N*A060V17**14
CAP**4221AL*	0.99	1.04	59"N*A060V17**14
CNPV**3617AL*	0.98	1.08	59"N*A080V17**14
CNPV**4221AL*	0.99	1.09	59"N*A080V17**14
CNPV**3617AL*	0.95	1.04	59"N*A080V17**14
CNPV**3621AL*	0.95	0.99	59"N*A080V17**14
CNPV**3717AL*	0.97	1.02	59"N*A080V17**14
CNPV**4221AL*	0.97	1.02	59"N*A080V17**14
CSPH**3612AL*	1.00	1.05	59"N*A080V17**14
CSPH**4212AL*	1.00	1.05	59"N*A080V17**14
CAP**3617AL*	0.98	1.03	59"N*A080V17**14
CAP**4221AL*	0.99	1.04	59MN7A060V21**20
CNPV**3617AL*	0.98	1.04	59MN7A060V21**20
CAP**4224AL*	0.99	1.04	59MN7A060V21**20

2-STAGE (HI-Stage 5, Lo-Stage 2)				2-STAGE (HI-Stage 5, Lo-Stage 2)			
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Furnace Model	High Speed Cap.	Power	Low Speed Cap.
FV4CN(B,F)003L	0.94	0.94	0.99		0.94	0.94	0.94
FV4CNF002L	0.94	0.94	1.00		0.97	0.97	
CAP**2414AL*	0.94	0.99	1.08	58PH*045-08	0.94	1.12	0.97
CAP**2417AL*	0.94	0.99	1.09	58PH*045-08	0.94	1.12	0.97
CAP**3014AL*	0.95	0.95	1.08	58PH*045-08	0.94	1.11	0.97
CNPV**3017AL*	0.95	0.95	1.09	58PH*045-08	0.94	1.11	0.97
CNPV**2414AL*	0.93	0.98	1.08	58PH*045-08	0.94	1.12	0.97
CNPV**2417AL*	0.93	0.98	1.08	58PH*045-08	0.94	1.12	0.97
CNPV**3017AL*	0.95	1.00	1.08	58PH*045-08	0.94	1.11	0.97
CNPV**3117AL*	0.95	1.00	1.09	58PH*045-08	0.94	1.11	0.97
CNPV**3117AL*	0.95	0.95	1.12	58PH*045-08	0.94	1.11	0.97
CAP**2414AL*	0.93	0.93	1.08	58CTW045-12	0.94	1.08	1.08
CAP**2417AL*	0.94	0.94	1.08	58CTW045-12	0.94	1.07	1.07
CAP**3014AL*	0.93	0.93	1.10	58CTW045-12	0.94	1.09	1.09
CAP**3017AL*	0.93	0.93	1.11	58CTW045-12	0.94	1.09	1.09
CNPV**2414AL*	0.93	0.98	1.08	58CTW045-12	0.94	1.07	1.07
CNPV**2417AL*	0.93	0.98	1.08	58CTW045-12	0.94	1.07	1.07
CNPV**3014AL*	0.93	0.97	1.10	58CTW045-12	0.93	1.03	1.03
CNPV**3017AL*	0.93	0.93	1.11	58CTW045-12	0.93	1.03	1.03
CNPV**3117AL*	0.94	0.94	1.12	58CTW045-12	0.95	1.05	1.05
CSPH**3012AL*	0.93	0.93	1.11	58CTW045-12	0.96	1.05	1.05
CSPH**2412AL*	0.93	0.93	1.11	58CTW070-16	0.95	1.07	1.07
CAP**3017AL*	0.93	0.93	1.11	58CTW070-16	0.95	1.05	1.05
CNPV**2417AL*	0.96	1.05	1.09	58CTW070-16	0.93	0.97	1.07
CNPV**3017AL*	0.93	0.98	1.11	58CTW070-16	0.93	1.07	1.13
CNPV**3117AL*	0.95	0.95	1.12	58CTW070-16	0.94	1.04	1.08
CNPV**2417AL*	0.93	0.98	1.08	58CTW070-16	0.93	1.03	1.07
CNPV**3017AL*	0.93	0.93	1.11	58CTW070-16	0.96	1.00	1.09
CNPV**3117AL*	0.95	0.95	1.12	58CTW070-16	0.92	1.01	1.07
CSPH**2412AL*	0.97	1.01	1.09	58CTW070-16	0.93	0.98	1.07
CSPH**3012AL*	0.93	0.93	1.11	58CTW070-16	0.94	0.99	1.09
CSPH**2412AL*	0.94	0.94	1.13	58CTW090-16	0.96	1.05	1.10
CSPH**3012AL*	0.95	0.95	1.14	58CTW090-16	0.93	0.98	1.08
CAP**2414AL*	0.95	1.00	1.08	59"P2A040E14**10	0.96	1.05	1.10
CAP**2417AL*	0.93	0.98	1.08	59"P2A040E14**10	0.97	1.01	1.16
CAP**3014AL*	0.94	0.99	1.07	59"P2A040E14**10	0.94	1.04	1.08
CNPV**2414AL*	0.93	0.97	1.07	59"P2A040E14**10	0.93	1.03	1.07
CNPV**2417AL*	0.93	0.97	1.07	59"P2A040E14**10	0.96	1.00	1.09
CNPV**3014AL*	0.94	0.99	1.07	59"P2A040E14**10	0.92	1.01	1.07
CNPV**3017AL*	0.94	0.99	1.07	59"P2A040E14**10	0.93	0.98	1.07
CNPV**3117AL*	0.95	1.00	1.08	59"P2A040E14**10	0.94	0.99	1.09
CSPH**3117AL*	0.94	0.94	1.11	59"P2A040E14**10	0.96	1.05	1.10
CSPH**3012AL*	0.97	1.01	1.09	59"P2A040E14**10	0.93	0.98	1.08
CAP**2417AL*	0.93	0.98	1.07	59"P2A040E17**12	0.96	1.05	1.10
CAP**3017AL*	0.95	1.00	1.08	59"P2A040E17**12	0.94	1.04	1.08
CNPV**2417AL*	0.93	0.97	1.07	59"P2A040E17**12	0.93	1.03	1.07
CNPV**3017AL*	0.97	1.01	1.09	59"P2A040E17**12	0.96	1.00	1.09
CNPV**3117AL*	0.95	1.05	1.08	59"P2A040E17**12	0.92	1.01	1.07
CNPV**3117AL*	0.96	1.00	1.10	59"P2A040E17**12	0.94	0.99	1.09
CAP**2414AL*	0.94	0.94	1.09	59"P2A060E14**12	0.96	1.05	1.10
CAP**2417AL*	0.95	0.95	1.10	59"P2A060E14**12	0.93	0.98	1.08
CAP**3014AL*	0.93	0.93	1.11	59"P2A060E14**12	0.97	1.01	1.16

2-STAGE (HI-Stage 5, Lo-Stage 2)				2-STAGE (HI-Stage 5, Lo-Stage 2)			
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Furnace Model	High Speed Cap.	Power	Low Speed Cap.
CAP**3017AL*	0.94	0.94	1.12	59"P2A000E14**12	0.94	1.11	1.11
CNPV**2414AL*	0.94	0.99	1.09	59"P2A000E14**12	0.94	1.09	1.09
CNPV**2417AL*	0.94	0.99	1.09	59"P2A000E14**12	0.94	1.09	1.09
CNPV**3014AL*	0.93	0.98	1.11	59"P2A000E14**12	0.93	1.11	1.11
CNPV**3017AL*	0.94	0.94	1.12	59"P2A000E14**12	0.94	1.11	1.11
CSPH**2412AL*	0.96	0.96	1.13	59"P2A000E14**12	0.96	1.09	1.10
CSPH**3012AL*	0.95	0.95	1.09	59"P2A000E14**12	0.95	1.09	1.10
CSPH**2412AL*	0.94	0.94	1.12	59"P2A000E14**12	0.94	1.10	1.13
CSPH**2412AL*	0.96	0.96	1.13	59"P2A000E14**12	0.96	1.10	1.13
CSPH**2412AL*	0.95	0.95	1.13	59"P2A000E17**14	0.95	1.15	1.15
CSPH**2417AL*	0.96	1.00	1.10	59"P2A000E17**16	0.96	1.10	1.10
CSPH**2412AL*	0.94	0.94	1.12	59"P2A000E17**16	0.94	1.12	1.12
CAP**2414AL*	0.93	1.03	1.07	59"P5A040E14**10	0.93	1.07	1.17
CAP**2417AL*	0.94	1.04	1.07	59"P5A040E14**10	0.94	1.07	1.17
CAP**3014AL*	0.95	1.05	1.07	59"P5A040E14**10	0.95	1.05	1.16
CAP**3017AL*	0.93	1.03	1.07	59"P5A040E14**10	0.93	1.03	1.17
CNPV**2414AL*	0.95	1.05	1.07	59"P5A040E14**10	0.95	1.05	1.17
CNPV**2417AL*	0.93	1.03	1.07	59"P5A040E14**10	0.93	1.03	1.17
CNPV**3014AL*	0.95	1.05	1.07	59"P5A040E14**10	0.95	1.05	1.15
CNPV**3017AL*	0.95	1.05	1.07	59"P5A040E14**10	0.95	1.05	1.15
CNPV**3117AL*	0.96	1.05	1.08	59"P5A040E14**10	0.96	1.05	1.13
CSPH**2412AL*	0.95	1.05	1.07	59"P5A040E14**10	0.95	1.05	1.17
CSPH**3012AL*	0.93	0.97	1.07	59"P5A040E17**12	0.93	0.97	1.14
CAP**3017AL*	0.93	0.98	1.07	59"P5A040E17**12	0.93	0.98	1.13
CNPV**2417AL*	0.94	1.04	1.08	59"P5A040E17**12	0.94	1.04	1.15
CNPV**3117AL*	0.96	1.00	1.09	59"P5A040E17**12	0.96	1.00	1.12
CNPV**2417AL*	0.92	1.01	1.07	59"P5A040E17**12	0.92	1.01	1.14
CNPV**3017AL*	0.93	0.98	1.07	59"P5A040E17**12	0.93	0.98	1.13
CNPV**3117AL*	0.94	0.99	1.09	59"P5A040E17**12	0.94	0.99	1.12
CSPH**2412AL*	0.96	1.05	1.10	59"P5A040E17**12	0.96	1.05	1.23
CSPH**3012AL*	0.93	0.98	1.08	59"P5A040E17**12	0.93	0.98	1.13
CNPV**2417AL*	0.96	1.05	1.10	59"P5A060E14**12	0.96	1.05	1.17

See notes on page 48

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAAP. AIR	24VNA924B / FE4ANF002L Efficiency Mode Condenser Entering Air Temperature °F (°C)																							
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**
			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†	
75 (23.9)	72 (22.2)	825	23.43	9.90	2.85	825	25.03	10.49	2.52	825	26.46	11.02	2.20	825	28.00	11.60	1.91	825	29.51	12.16	1.63	825	31.01	12.73	1.37
	67 (19.4)		21.30	13.70	2.81		22.76	14.32	2.49		24.07	14.89	2.18		25.46	15.50	1.90		26.82	16.10	1.63		28.19	16.70	1.38
	63 (17.2)		19.74	16.69	2.78		21.07	17.34	2.47		22.29	17.94	2.17		23.58	18.57	1.89		24.85	19.20	1.63		26.11	19.82	1.39
	57 (13.9)		18.74	18.74	2.76		19.81	19.81	2.45		20.78	20.78	2.15		21.79	21.79	1.88		22.78	22.78	1.63		23.74	23.74	1.39
	72 (22.2)		23.36	13.70	2.85		24.96	14.32	2.52		26.39	14.88	2.20		27.93	15.49	1.91		29.44	16.09	1.63		30.94	16.69	1.37
80 (26.7)	67 (19.4)	825	21.24	17.45	2.81	825	22.69	18.11	2.49	825	24.00	18.72	2.18	825	25.39	19.36	1.90	825	26.76	19.99	1.63	825	28.12	20.63	1.38
	63 (17.2)		19.96	19.96	2.78		21.18	20.93	2.47		22.35	21.63	2.17		23.61	22.34	1.89		24.86	23.02	1.63		26.10	23.70	1.38
	57 (13.9)		19.93	19.93	2.78		21.05	21.05	2.47		22.07	22.07	2.16		23.12	23.12	1.89		24.16	24.16	1.63		25.17	25.17	1.39
	72 (22.2)		16.60	7.18	1.72		17.75	7.59	1.53		18.75	7.96	1.31		19.88	8.37	1.12		20.99	8.78	0.94		22.08	9.18	0.77
	67 (19.4)		15.01	10.22	1.72		16.06	10.66	1.53		16.99	11.06	1.32		18.00	11.49	1.14		18.99	11.92	0.97		19.97	12.34	0.81
75 (23.9)	63 (17.2)	650	13.88	12.59	1.71	650	14.82	13.06	1.54	650	15.70	13.48	1.32	650	16.62	13.94	1.15	650	17.52	14.38	0.99	650	18.40	14.82	0.84
	57 (13.9)		13.48	13.48	1.71		14.25	14.25	1.54		14.97	14.97	1.32		15.70	15.70	1.16		16.40	16.40	1.01		17.10	17.10	0.86
	72 (22.2)		16.54	10.24	1.72		17.69	10.68	1.53		18.68	11.07	1.31		19.81	11.51	1.12		20.92	11.94	0.94		22.01	12.37	0.77
	67 (19.4)		14.98	13.23	1.72		16.01	13.70	1.53		16.94	14.13	1.32		17.95	14.59	1.14		18.93	15.05	0.97		19.91	15.50	0.81
	63 (17.2)		14.42	14.42	1.72		15.24	15.24	1.53		15.99	15.99	1.32		16.77	16.77	1.15		17.61	17.39	0.99		18.46	17.89	0.83
80 (26.7)	57 (13.9)	650	14.40	14.40	1.72	650	15.22	15.22	1.53	650	15.96	15.96	1.32	650	16.74	16.74	1.15	650	17.50	17.50	0.99	650	18.23	18.23	0.84
	72 (22.2)		14.01	6.30	1.38		15.00	6.65	1.24		9.25	4.60	0.54		9.85	4.81	0.46		10.45	5.01	0.37		11.04	5.22	0.29
	67 (19.4)		12.64	9.35	1.39		13.52	9.73	1.25		8.32	7.38	0.55		8.85	7.61	0.48		9.37	7.84	0.40		9.89	8.07	0.33
	63 (17.2)		11.71	11.62	1.39		12.49	12.06	1.26		8.11	8.11	0.55		8.56	8.56	0.48		9.00	9.00	0.41		9.43	9.43	0.34
	57 (13.9)		11.67	11.67	1.39		12.35	12.35	1.26		8.11	8.11	0.55		8.55	8.55	0.48		8.98	8.98	0.41		9.42	9.42	0.34
75 (23.9)	72 (22.2)	650	13.95	9.39	1.38	650	14.94	9.76	1.24	585	9.20	7.43	0.54	585	9.80	7.66	0.45	585	10.39	7.90	0.37	585	10.98	8.13	0.29
	67 (19.4)		12.66	12.32	1.39		13.52	12.75	1.25		8.77	8.77	0.54		9.26	9.26	0.47		9.73	9.73	0.39		10.19	10.19	0.31
	63 (17.2)		12.55	12.55	1.39		13.28	13.28	1.26		8.77	8.77	0.54		9.25	9.25	0.47		9.72	9.72	0.39		10.18	10.18	0.31
	57 (13.9)		12.53	12.53	1.39		13.26	13.26	1.26		8.76	8.76	0.54		9.24	9.24	0.47		9.71	9.71	0.39		10.17	10.17	0.31
	72 (22.2)		14.01	6.30	1.38		15.00	6.65	1.24		9.25	4.60	0.54		9.85	4.81	0.46		10.45	5.01	0.37		11.04	5.22	0.29
80 (26.7)	67 (19.4)	585	11.04	5.22	0.29	585	11.04	5.22	0.29	585	11.04	5.22	0.29	585	11.04	5.22	0.29	585	11.04	5.22	0.29	585	11.04	5.22	0.29
	63 (17.2)		10.18	10.18	0.31		10.18	10.18	0.31		10.18	10.18	0.31		10.18	10.18	0.31		10.18	10.18	0.31		10.18	10.18	0.31
	57 (13.9)		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31
	72 (22.2)		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31
	67 (19.4)		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31		10.17	10.17	0.31

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 — Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 48

24VNA924B

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL	2-STAGE (HI-Stage 5, Lo-Stage 2)			
				Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.
CSPH*4212AL*	1.00	1.00	58CV(A/X)070-12				
CSPH*4212AL*	1.00	1.00	58CV(A/X)090-16				
CSPH*4812AL*	1.00	1.00	59"N*AO60V17**14				
CSPH*4812AL*	1.00	1.00	59"N*AO80V17**14				
*FV4CNF002L	1.00	1.00	1.00				
FV4CN(B)F003L	1.04	0.95	0.99	0.98			
FV4CNF002L	1.03	0.94	1.00	1.00			
CAP**2414AL*	1.03	0.99	1.08	1.16			
CAP**2414AL*	1.03	0.93	1.09	1.13			
CAP**2414AL*	1.02	1.02	1.07	1.19			
CAP**2414AL*	1.02	0.97	1.08	1.15			
CAP**2414AL*	1.02	0.92	1.08	1.11			
CAP**2414AL*	1.02	0.97	1.08	1.16			
CAP**2417AL*	1.02	0.97	1.07	1.15			
CAP**2417AL*	1.03	0.94	1.10	1.14			
CAP**2417AL*	1.02	1.02	1.07	1.19			
CAP**2417AL*	1.01	0.96	1.07	1.17			
CAP**2417AL*	1.03	0.98	1.09	1.16			
CAP**2417AL*	1.03	0.93	1.08	1.10			
CAP**2417AL*	1.03	0.93	1.11	1.13			
CAP**2417AL*	1.03	0.98	1.07	1.16			
CAP**3014AL*	1.04	0.95	1.11	1.16			
CAP**3014AL*	1.03	1.03	1.07	1.19			
CAP**3014AL*	1.03	0.94	1.08	1.15			
CAP**3014AL*	1.03	0.94	1.10	1.13			
CAP**3017AL*	1.03	0.99	1.08	1.16			
CAP**3017AL*	1.03	0.99	1.08	1.16			
CAP**3017AL*	1.04	0.95	1.12	1.16			
CAP**3017AL*	1.03	1.03	1.07	1.18			
CAP**3017AL*	1.02	0.97	1.07	1.17			
CAP**3017AL*	1.03	0.94	1.09	1.15			
CAP**3017AL*	1.03	0.94	1.11	1.13			
CAP**3017AL*	1.04	0.95	1.11	1.12			
CNP#2417AL*	1.03	1.03	1.08	1.16			
CNP#2417AL*	1.04	0.99	1.11	1.17			
CNP#2417AL*	1.04	0.99	1.10	1.14			
CNP#2417AL*	1.03	1.03	1.09	1.11			
CNP#3017AL*	1.03	1.03	1.08	1.16			
CNP#3017AL*	1.02	1.02	1.07	1.17			
CNP#3017AL*	1.04	0.99	1.11	1.16			
CNP#3017AL*	1.03	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2417AL*	1.00	0.95	1.07	1.16			
CNP#2417AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.96	1.08	1.11			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			
CNP#2417AL*	1.01	0.96	1.08	1.15			
CNP#2414AL*	1.01	0.96	1.08	1.11			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#3117AL*	1.07	0.97	1.12	1.10			
CNP#3117AL*	1.04	0.99	1.10	1.14			
CNP#2414AL*	1.00	0.95	1.07	1.16			
CNP#2414AL*	1.02	0.97	1.09	1.13			
CNP#2417AL*	1.01	1.01	1.07	1.20			
CNP#2417AL*	0.99	0.99	1.07	1.17			

See notes on page 48

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAP. AIR	24VNA25/FE4AHF05 Efficiency Mode Condenser Entering Air Temperature °F (°C)																							
		115 (46.1)			105 (40.5)			95 (35)			85 (29.4)			75 (23.9)			65 (18.3)								
		ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**				
			Sens†	Total			Sens†	Total			Sens†	Total			Sens†	Total			Sens†	Total		Sens†	Total	Sens†	Total
75 (23.9)	72 (22.2)	825	23.68	9.99	2.51	825	25.12	10.51	2.21	825	26.43	11.00	1.90	825	27.77	11.50	1.62	825	29.08	11.99	1.34	825	30.34	12.47	1.07
	67 (19.4)		21.55	13.82	2.50		22.88	14.39	2.21		24.10	14.93	1.92		25.35	15.48	1.65		26.55	16.01	1.39		27.72	16.54	1.13
	63 (17.2)		19.97	16.81	2.49		21.22	17.43	2.22		22.38	18.00	1.93		23.54	18.59	1.67		24.67	19.16	1.42		25.77	19.72	1.17
	57 (13.9)		18.96	18.96	2.48		19.97	19.97	2.21		20.91	20.91	1.94		21.84	21.84	1.69		22.75	22.75	1.45		23.62	23.62	1.21
	72 (22.2)		23.52	13.77	2.50		24.94	14.33	2.20		26.25	14.85	1.90		27.59	15.38	1.61		28.89	15.91	1.34		30.15	16.42	1.07
80 (26.7)	67 (19.4)	825	21.46	17.56	2.50	825	22.78	18.18	2.21	825	24.00	18.75	1.92	825	25.24	19.33	1.65	825	26.45	19.90	1.39	825	27.61	20.46	1.13
	63 (17.2)		20.19	20.19	2.49		21.30	21.10	2.22		22.43	21.76	1.93		23.57	22.40	1.67		24.68	23.02	1.42		25.77	23.62	1.17
	57 (13.9)		20.15	20.15	2.49		21.20	21.20	2.22		22.18	22.18	1.93		23.15	23.15	1.67		24.09	24.09	1.43		25.00	25.00	1.19
	STAGE 3																								
75 (23.9)	72 (22.2)	650	15.55	6.67	1.25	650	16.54	7.02	1.17	650	17.29	7.30	1.03	650	18.23	7.64	0.91	650	19.14	7.98	0.77	650	20.05	8.32	0.61
	67 (19.4)		14.11	9.43	1.25		15.02	9.82	1.18		15.76	10.15	1.05		16.63	10.52	0.95		17.47	10.89	0.82		18.29	11.25	0.67
	63 (17.2)		13.09	11.60	1.25		13.94	12.02	1.19		14.67	12.38	1.06		15.47	12.78	0.97		16.26	13.17	0.85		17.02	13.56	0.71
	57 (13.9)		12.65	12.65	1.25		13.36	13.36	1.20		13.97	13.97	1.07		14.62	14.62	0.98		15.26	15.26	0.87		15.89	15.89	0.75
	72 (22.2)		15.43	9.41	1.24		16.40	9.79	1.17		17.14	10.08	1.03		18.08	10.45	0.91		18.99	10.81	0.77		19.94	11.19	0.61
80 (26.7)	67 (19.4)	650	14.07	12.14	1.25	650	14.97	12.56	1.18	650	15.70	12.91	1.05	650	16.56	13.31	0.94	650	17.39	13.70	0.82	650	18.21	14.09	0.67
	63 (17.2)		13.49	13.49	1.25		14.23	14.23	1.19		14.84	14.84	1.06		15.54	15.49	0.96		16.30	15.95	0.84		17.05	16.38	0.71
	57 (13.9)		13.47	13.47	1.25		14.20	14.20	1.19		14.81	14.81	1.06		15.50	15.50	0.96		16.17	16.17	0.85		16.81	16.81	0.72
	STAGE 1																								
75 (23.9)	72 (22.2)	650	12.12	5.39	0.73	650	12.92	5.68	0.75	585	10.55	4.66	0.46	585	11.18	4.89	0.44	585	11.84	5.13	0.39	585	12.52	5.37	0.28
	67 (19.4)		10.98	7.95	0.74		11.73	8.27	0.77		9.58	6.85	0.47		10.16	7.10	0.47		10.74	7.35	0.43		11.36	7.61	0.34
	63 (17.2)		10.22	9.94	0.74		10.91	10.29	0.77		8.93	8.56	0.49		9.46	8.83	0.49		10.00	9.10	0.46		10.55	9.37	0.38
	57 (13.9)		10.14	10.14	0.74		10.74	10.74	0.78		8.82	8.82	0.49		9.29	9.29	0.50		9.75	9.75	0.47		10.21	10.21	0.40
	72 (22.2)		11.99	7.94	0.73		12.79	8.25	0.75		10.41	6.81	0.46		11.06	7.06	0.44		11.73	7.32	0.38		12.41	7.59	0.28
80 (26.7)	67 (19.4)	650	10.97	10.45	0.74	650	11.70	10.80	0.76	585	9.55	8.98	0.47	585	10.13	9.25	0.47	585	10.71	9.53	0.43	585	11.32	9.81	0.34
	63 (17.2)		10.83	10.83	0.74		11.46	11.46	0.77		9.40	9.40	0.48		9.89	9.89	0.48		10.37	10.37	0.44		10.87	10.87	0.36
	57 (13.9)		10.82	10.82	0.74		11.44	11.44	0.77		9.39	9.39	0.48		9.87	9.87	0.48		10.35	10.35	0.44		10.85	10.85	0.36
	STAGE 5																								

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

24VNA925

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*FE4AN(B,F)005L	1.00	1.00	
FE4AN(B,F)003L	0.96	0.98	
FE4ANB006L	0.98	1.07	
FE4ANF002L	0.96	0.98	
CAP**3614AL*	0.98	1.01	58CV(A,X)070-12
CAP**3617AL*	0.98	1.01	58CV(A,X)070-12
CNPV*3617AL*	0.98	1.02	58CV(A,X)070-12
CNPV*3617AL*	0.97	0.99	58CV(A,X)070-12
CNPV*3717AL*	0.96	1.00	58CV(A,X)070-12
CNPV*4217AL*	0.98	0.98	58CV(A,X)070-12
CSPH*3612AL*	1.00	1.02	58CV(A,X)070-12
CSPH*4212AL*	1.00	1.02	58CV(A,X)070-12
CAP**3617AL*	0.98	1.01	58CV(A,X)090-16
CAP**3621AL*	0.98	1.01	58CV(A,X)090-16
CAP**4217AL*	0.99	0.99	58CV(A,X)090-16
CNPV*3617AL*	0.98	1.01	58CV(A,X)090-16
CNPV*4212AL*	0.99	1.02	58CV(A,X)090-16
CNPV*3617AL*	0.97	0.99	58CV(A,X)090-16
CNPV*3621AL*	0.97	0.99	58CV(A,X)090-16
CNPV*3717AL*	0.98	0.98	58CV(A,X)090-16
CNPV*4217AL*	0.96	0.98	58CV(A,X)090-16
CNPV*4217AL*	0.98	0.98	58CV(A,X)090-16
CSPH*3612AL*	1.00	1.00	58CV(A,X)090-16
CSPH*4212AL*	1.01	1.01	58CV(A,X)090-16
CAP**3617AL*	0.98	1.02	59"N*A060V17**14
CAP**3621AL*	0.98	1.01	59"N*A060V17**14
CAP**4212AL*	0.98	1.01	59"N*A060V17**14
CNPV*3617AL*	0.98	1.11	59"N*A060V17**14
CNPV*4212AL*	0.96	1.12	59"N*A060V17**14
CNPV*3617AL*	0.94	1.02	59"N*A060V17**14
CNPV*3717AL*	0.98	1.00	59"N*A060V17**14
CNPV*4212AL*	0.95	1.03	59"N*A060V17**14
CSPH*3612AL*	0.99	1.02	59"N*A060V17**14
CSPH*4212AL*	1.00	1.02	59"N*A060V17**14
CAP**3617AL*	0.98	1.01	59"N*A080V17**14
CAP**3621AL*	0.98	1.01	59"N*A080V17**14
CAP**4212AL*	0.99	1.02	59"N*A080V17**14
CNPV*3617AL*	0.96	1.07	59"N*A080V17**14
CNPV*4212AL*	0.99	1.08	59"N*A080V17**14
CNPV*3617AL*	0.95	1.03	59"N*A080V17**14
CNPV*3717AL*	0.98	1.00	59"N*A080V17**14
CNPV*4212AL*	0.98	1.00	59"N*A080V17**14
CSPH*3612AL*	1.00	1.02	59"N*A080V17**14
CSPH*4212AL*	1.00	1.02	59MN7A060V21**20
CAP**3621AL*	0.99	1.02	59MN7A060V21**20
CAP**4224AL*	0.99	1.02	59MN7A060V21**20

2-STAGE (HI-Stage 5, Lo-Stage 2)				2-STAGE (HI-Stage 5, Lo-Stage 2)			
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Furnace Model	High Speed Cap.	Power	Low Speed Cap.
FV4CN(B,F)003L	0.94	0.98	0.99		0.94	0.94	
FV4CNF002L	0.94	0.98	1.00	58PH*045-08	0.97	1.09	
CAP**2414AL*	0.94	1.02	1.08	58PH*045-08	1.12	1.12	
CAP**2417AL*	0.94	1.02	1.09	58PH*045-08	1.12	1.12	
CAP**3014AL*	0.95	0.99	1.08	58PH*045-08	1.11	1.11	
CNPV*3017AL*	0.93	1.01	1.08	58PH*045-08	1.12	1.12	
CNPV*2417AL*	0.93	1.01	1.08	58PH*045-08	1.12	1.12	
CNPV*3017AL*	0.95	1.03	1.08	58PH*045-08	1.11	1.11	
CNPV*3017AL*	0.95	1.03	1.09	58PH*045-08	1.11	1.11	
CNPV*3117AL*	0.95	0.99	1.12	58PH*045-08	1.11	1.11	
CAP**2414AL*	0.94	0.98	1.08	58CTW045-12	0.98	1.08	
CAP**2417AL*	0.94	0.98	1.08	58CTW045-12	0.98	1.08	
CAP**3014AL*	0.93	0.96	1.10	58CTW045-12	1.09	1.09	
CAP**3017AL*	0.93	0.97	1.11	58CTW045-12	1.09	1.09	
CNPV*2417AL*	0.93	1.01	1.08	58CTW045-12	1.07	1.07	
CNPV*3014AL*	0.93	1.01	1.10	58CTW045-12	1.09	1.09	
CNPV*3017AL*	0.93	0.97	1.11	58CTW045-12	1.09	1.09	
CNPV*3117AL*	0.94	0.98	1.12	58CTW045-12	1.06	1.06	
CSPH*3012AL*	0.93	0.96	1.11	58CTW045-12	1.08	1.08	
CAP**2417AL*	0.93	0.96	1.11	58CTW070-16	1.08	1.08	
CNPV*2417AL*	0.93	0.97	1.11	58CTW070-16	1.08	1.08	
CNPV*3017AL*	0.96	1.04	1.09	58CTW070-16	1.07	1.07	
CNPV*3117AL*	0.93	1.01	1.11	58CTW070-16	1.08	1.08	
CNPV*2417AL*	0.93	1.01	1.08	58CTW070-16	1.07	1.07	
CNPV*3017AL*	0.93	0.97	1.11	58CTW070-16	1.08	1.08	
CNPV*3117AL*	0.95	0.99	1.12	58CTW070-16	1.05	1.05	
CSPH*2412AL*	0.97	1.05	1.09	58CTW070-16	1.08	1.08	
CSPH*3012AL*	0.93	0.97	1.11	58CTW070-16	1.07	1.07	
CSPH*2412AL*	0.94	0.98	1.13	58CTW090-16	1.15	1.15	
CSPH*3012AL*	0.95	0.99	1.14	58CTW090-16	1.12	1.12	
CAP**2414AL*	0.95	1.03	1.08	59"P2A040E14**10	0.96	1.06	
CAP**2417AL*	0.93	1.01	1.08	59"P2A040E14**10	0.93	1.03	
CAP**3014AL*	0.94	1.02	1.07	59"P2A040E14**10	1.12	1.12	
CNPV*2414AL*	0.93	1.01	1.07	59"P2A040E14**10	1.13	1.13	
CNPV*2417AL*	0.93	1.01	1.07	59"P2A040E14**10	1.13	1.13	
CNPV*3014AL*	0.94	1.02	1.07	59"P2A040E14**10	1.12	1.12	
CNPV*3017AL*	0.95	1.03	1.08	59"P2A040E14**10	1.12	1.12	
CNPV*3117AL*	0.96	1.04	1.10	59"P2A040E14**10	1.23	1.23	
CSPH*3012AL*	0.97	1.05	1.09	59"P2A040E14**10	1.11	1.11	
CAP**2417AL*	0.93	1.01	1.07	59"P2A040E17**12	1.12	1.12	
CNPV*3017AL*	0.95	1.03	1.08	59"P2A040E17**12	1.13	1.13	
CNPV*3117AL*	0.97	1.05	1.09	59"P2A040E17**12	1.12	1.12	
CNPV*2417AL*	0.93	1.01	1.07	59"P2A040E17**12	1.13	1.13	
CNPV*3017AL*	0.95	1.03	1.08	59"P2A040E17**12	1.12	1.12	
CNPV*3117AL*	0.97	1.05	1.09	59"P2A040E17**12	1.10	1.10	
CSPH*2412AL*	0.96	1.04	1.10	59"P2A060E14**12	1.25	1.25	
CAP**2414AL*	0.94	0.98	1.09	59"P2A060E14**12	1.10	1.10	
CAP**2417AL*	0.95	0.99	1.10	59"P2A060E14**12	1.10	1.10	
CAP**3014AL*	0.93	0.97	1.11	59"P2A060E14**12	1.11	1.11	

2-STAGE (HI-Stage 5, Lo-Stage 2)				2-STAGE (HI-Stage 5, Lo-Stage 2)			
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Furnace Model	High Speed Cap.	Power	Low Speed Cap.
CAP**3017AL*	0.94	0.98	1.12	59"P2A000E14**12	1.11	1.11	
CNPV*2414AL*	0.94	1.02	1.09	59"P2A000E14**12	1.09	1.09	
CNPV*2417AL*	0.94	1.02	1.09	59"P2A000E14**12	1.09	1.09	
CNPV*3014AL*	0.93	1.01	1.11	59"P2A000E14**12	1.11	1.11	
CNPV*3017AL*	0.94	0.98	1.12	59"P2A000E14**12	1.11	1.11	
CNPV*3117AL*	0.96	1.00	1.13	59"P2A000E14**12	1.09	1.09	
CSPH*2412AL*	0.95	0.99	1.09	59"P2A000E14**12	1.10	1.10	
CSPH*3012AL*	0.94	0.98	1.12	59"P2A000E14**12	1.10	1.10	
CSPH*2412AL*	0.96	1.04	1.11	59"P2A000E17**14	1.13	1.13	
CSPH*2412AL*	0.95	0.99	1.13	59"P2A000E17**14	1.15	1.15	
CSPH*2417AL*	0.96	1.04	1.10	59"P2A000E17**16	1.10	1.10	
CSPH*2412AL*	0.94	0.98	1.12	59"P2A000E17**16	1.12	1.12	
CAP**2414AL*	0.93	1.06	1.07	59"P5A040E14**10	1.17	1.17	
CAP**2417AL*	0.94	1.07	1.07	59"P5A040E14**10	1.17	1.17	
CAP**3014AL*	0.95	1.08	1.07	59"P5A040E14**10	1.16	1.16	
CAP**3017AL*	0.95	1.08	1.07	59"P5A040E14**10	1.15	1.15	
CNPV*2414AL*	0.93	1.11	1.07	59"P5A040E14**10	1.17	1.17	
CNPV*2417AL*	0.93	1.11	1.07	59"P5A040E14**10	1.17	1.17	
CNPV*3014AL*	0.95	1.08	1.07	59"P5A040E14**10	1.16	1.16	
CNPV*3017AL*	0.95	1.08	1.07	59"P5A040E14**10	1.15	1.15	
CNPV*3117AL*	0.98	1.11	1.08	59"P5A040E14**10	1.13	1.13	
CSPH*2412AL*	0.95	1.08	1.07	59"P5A040E14**10	1.17	1.17	
CSPH*3012AL*	0.95	1.08	1.08	59"P5A040E14**10	1.15	1.15	
CAP**2417AL*	0.93	1.01	1.07	59"P5A040E17**12	1.14	1.14	
CAP**3017AL*	0.93	1.01	1.07	59"P5A040E17**12	1.13	1.13	
CNPV*2417AL*	0.94	1.12	1.08	59"P5A040E17**12	1.15	1.15	
CNPV*3117AL*	0.96	1.04	1.09	59"P5A040E17**12	1.12	1.12	
CNPV*3017AL*	0.92	1.04	1.07	59"P5A040E17**12	1.14	1.14	
CNPV*3017AL*	0.93	1.01	1.07	59"P5A040E17**12	1.13	1.13	
CNPV*3117AL*	0.96	1.04	1.09	59"P5A040E17**12	1.12	1.12	
CSPH*2412AL*	0.96	1.09	1.10	59"P5A040E17**12	1.23	1.23	
CSPH*3012AL*	0.93	1.01	1.08	59"P5A040E17**12	1.10	1.10	
CNPV*2417AL*	0.96	1.09	1.10	59"P5A060E17**14	1.17	1.17	
CSPH*2412AL*	0.97	1.05	1.10	59"P5A060E17**14	1.16	1.16	

See notes on page 48

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVA.P. AIR	24VNA936 / FE4ANF005 Efficiency Mode Condenser Entering Air Temperature °F (°C)																													
		115 (46.1)					105 (40.5)					95 (35)					85 (29.4)					75 (23.9)					65 (18.3)				
		ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**		
			Sens†	Total			Sens†	Total			Sens†	Total			Sens†	Total			Sens†	Total			Sens†	Total			Sens†	Total		Sens†	Total
75 (23.9)	72 (22.2)	1050	34.24	14.18	4.44	3.89	36.41	14.99	3.89	1050	38.29	15.70	3.36	40.30	16.47	2.87	1050	42.28	17.24	2.41	44.18	17.98	1.98								
	67 (19.4)		31.38	19.07	4.38	3.85	33.35	19.95	3.85		35.13	20.75	3.34	36.99	21.60	2.87		38.79	22.42	2.43	40.52	23.22	2.02								
	63 (17.2)		29.21	22.90	4.33	3.81	31.07	23.84	3.81		32.74	24.70	3.31	34.48	25.59	2.86		36.17	26.47	2.44	37.79	27.32	2.04								
	57 (13.9)		27.05	27.05	4.27	3.77	28.50	28.50	3.77		29.85	29.85	3.28	31.20	31.20	2.84		32.65	32.25	2.44	34.08	33.21	2.06								
	72 (22.2)		34.04	18.92	4.44	3.88	36.21	19.79	3.88		38.09	20.56	3.35	40.10	21.39	2.86		42.08	22.22	2.41	43.98	23.01	1.98								
80 (26.7)	67 (19.4)	1050	31.25	23.78	4.38	3.84	33.23	24.72	3.84	1050	35.00	25.57	3.33	36.86	26.47	2.86	1050	38.66	27.35	2.42	40.39	28.21	2.02								
	63 (17.2)		29.21	27.55	4.33	3.81	31.05	28.56	3.81		32.70	29.48	3.31	34.43	30.44	2.86		36.11	31.38	2.43	37.72	32.28	2.04								
	57 (13.9)		28.61	28.61	4.32	3.80	30.14	30.14	3.80		31.53	31.53	3.30	32.95	32.95	2.85		34.31	34.31	2.44	35.64	35.64	2.05								
	STAGE 3																														
	72 (22.2)		21.81	9.32	1.96	1.83	23.25	9.85	1.83		24.29	10.24	1.67	25.66	10.75	1.50		27.01	11.26	1.31	28.33	11.75	1.10								
75 (23.9)	67 (19.4)	900	19.85	13.12	1.96	1.84	21.18	13.71	1.84	900	22.21	14.19	1.68	23.48	14.77	1.52	900	24.72	15.33	1.35	25.94	15.89	1.15								
	63 (17.2)		18.41	16.08	1.95	1.85	19.66	16.73	1.85		20.68	17.29	1.68	21.87	17.91	1.54		23.02	18.53	1.37	24.16	19.14	1.19								
	57 (13.9)		17.71	17.71	1.95	1.85	18.75	18.75	1.85		19.63	19.63	1.68	20.61	20.61	1.54		21.57	21.57	1.39	22.50	22.50	1.22								
	72 (22.2)		21.64	13.06	1.95	1.83	23.07	13.65	1.83		24.08	14.08	1.66	25.46	14.65	1.49		26.81	15.21	1.31	28.13	15.76	1.10								
	67 (19.4)		19.77	16.83	1.95	1.84	21.09	17.48	1.84		22.11	18.01	1.67	23.37	18.64	1.52		24.60	19.26	1.35	25.82	19.87	1.15								
80 (26.7)	63 (17.2)	900	18.86	18.86	1.95	1.84	19.95	19.95	1.84	900	20.82	20.82	1.68	21.94	21.67	1.53	900	23.07	22.38	1.37	24.19	23.06	1.19								
	57 (13.9)		18.83	18.83	1.95	1.84	19.91	19.91	1.84		20.79	20.79	1.68	21.82	21.82	1.53		22.82	22.82	1.37	23.80	23.80	1.20								
	STAGE 1																														
	72 (22.2)		14.74	6.58	0.98	1.00	15.80	6.96	1.00		10.82	4.81	0.48	11.57	5.09	0.46		12.38	5.38	0.39	13.21	5.69	0.27								
	67 (19.4)		13.36	9.71	0.98	1.02	14.34	10.16	1.02		9.83	7.10	0.49	10.52	7.42	0.49		11.24	7.76	0.44	11.99	8.11	0.34								
75 (23.9)	63 (17.2)	800	12.47	12.13	0.98	1.03	13.37	12.65	1.03	800	9.17	8.88	0.51	9.81	9.25	0.51	800	10.45	9.62	0.47	11.13	10.00	0.38								
	57 (13.9)		12.37	12.37	0.98	1.03	13.18	13.18	1.03		9.09	9.09	0.51	9.66	9.66	0.52		10.22	10.22	0.48	10.81	10.81	0.40								
	72 (22.2)		14.58	9.69	0.97	1.00	15.63	10.12	1.00		10.67	7.06	0.47	11.46	7.39	0.46		12.27	7.73	0.39	13.08	8.07	0.27								
	67 (19.4)		13.36	12.75	0.98	1.02	14.32	13.27	1.02		9.80	9.32	0.49	10.49	9.70	0.49		11.21	10.08	0.44	11.95	10.47	0.34								
	63 (17.2)		13.20	13.20	0.98	1.02	14.04	14.04	1.02		9.68	9.68	0.49	10.28	10.28	0.49		10.89	10.89	0.45	11.52	11.52	0.36								
80 (26.7)	57 (13.9)	800	13.18	13.18	0.98	1.02	14.02	14.02	1.02	800	9.67	9.67	0.49	10.26	10.26	0.49	800	10.87	10.87	0.45	11.50	11.50	0.36								
	72 (22.2)		14.74	6.58	0.98	1.00	15.80	6.96	1.00		10.82	4.81	0.48	11.57	5.09	0.46		12.38	5.38	0.39	13.21	5.69	0.27								
	67 (19.4)		13.36	9.71	0.98	1.02	14.34	10.16	1.02		9.83	7.10	0.49	10.52	7.42	0.49		11.24	7.76	0.44	11.99	8.11	0.34								
	63 (17.2)		12.47	12.13	0.98	1.03	13.37	12.65	1.03		9.17	8.88	0.51	9.81	9.25	0.51		10.45	9.62	0.47	11.13	10.00	0.38								
	57 (13.9)		12.37	12.37	0.98	1.03	13.18	13.18	1.03		9.09	9.09	0.51	9.66	9.66	0.52		10.22	10.22	0.48	10.81	10.81	0.40								
80 (26.7)	72 (22.2)	800	14.58	9.69	0.97	1.00	15.63	10.12	1.00	800	10.67	7.06	0.47	11.46	7.39	0.46	800	12.27	7.73	0.39	13.08	8.07	0.27								
	67 (19.4)		13.36	12.75	0.98	1.02	14.32	13.27	1.02		9.80	9.32	0.49	10.49	9.70	0.49		11.21	10.08	0.44	11.95	10.47	0.34								
	63 (17.2)		13.20	13.20	0.98	1.02	14.04	14.04	1.02		9.68	9.68	0.49	10.28	10.28	0.49		10.89	10.89	0.45	11.52	11.52	0.36								
	57 (13.9)		13.18	13.18	0.98	1.02	14.02	14.02	1.02		9.67	9.67	0.49	10.26	10.26	0.49		10.87	10.87	0.45	11.50	11.50	0.36								
	72 (22.2)		14.74	6.58	0.98	1.00	15.80	6.96	1.00		10.82	4.81	0.48	11.57	5.09	0.46		12.38	5.38	0.39	13.21	5.69	0.27								

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

24VNA936

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*FE4AN(B,F)005L	1.00	1.00	
FE4AN(B,F)003L	0.97	0.97	
FE4AN(B)006L	0.99	0.99	
FE4ANF002L	0.96	1.01	
CAP**3614AL*	0.98	1.03	58CV(A,X)070-12
CSPH*3612AL*	0.98	1.03	58CV(A,X)070-12
CSPH*4212AL*	0.98	1.03	58CV(A,X)070-12
CAP**3617AL*	0.98	0.98	58CV(A,X)090-16
CAP**4817AL*	0.98	0.98	58CV(A,X)090-16
CNPV*3617AL*	0.95	1.00	58CV(A,X)090-16
CNPV*3617AL*	0.95	1.00	58CV(A,X)090-16
CNPV*3717AL*	0.97	0.97	58CV(A,X)090-16
CNPV*4217AL*	0.97	0.97	58CV(A,X)090-16
CNPV*4821AL*	0.97	1.01	58CV(A,X)090-16
CNPV*4821AL*	0.98	0.98	58CV(A,X)090-16
CSPH*3612AL*	0.98	0.98	58CV(A,X)090-16
CSPH*4212AL*	0.98	0.98	58CV(A,X)090-16
CAP**3617AL*	0.97	1.02	59*N*A060V17**14
CAP**4817AL*	0.98	1.03	59*N*A060V17**14
CNPV*3617AL*	0.95	1.05	59*N*A060V17**14
CNPV*3617AL*	0.95	1.05	59*N*A060V17**14
CNPV*3717AL*	0.97	1.02	59*N*A060V17**14
CNPV*4217AL*	0.95	1.00	59*N*A060V17**14
CNPV*4217AL*	0.95	1.05	59*N*A060V17**14
CNPV*4821AL*	0.97	1.02	59*N*A060V17**14
CSPH*3612AL*	0.97	1.02	59*N*A060V17**14
CSPH*4212AL*	0.98	1.03	59*N*A060V17**14
CSPH*4821AL*	0.98	1.03	59*N*A060V17**14
CAP**3617AL*	0.98	1.03	59*N*A060V17**14
CAP**4817AL*	0.98	1.03	59*N*A060V17**14
CNPV*3617AL*	0.95	1.05	59*N*A060V17**14
CNPV*3617AL*	0.95	1.05	59*N*A060V17**14
CNPV*3717AL*	0.97	1.02	59*N*A060V17**14
CNPV*4217AL*	0.95	1.00	59*N*A060V17**14
CNPV*4217AL*	0.95	1.05	59*N*A060V17**14
CNPV*4821AL*	0.97	1.02	59*N*A060V17**14
CSPH*3612AL*	0.97	1.02	59*N*A060V17**14
CSPH*4212AL*	0.98	1.03	59*N*A060V17**14
CSPH*4821AL*	0.98	1.03	59*N*A060V17**14
CAP**3617AL*	0.98	1.03	59*N*A060V17**14
CAP**4817AL*	0.98	1.03	59*N*A060V17**14
CNPV*3617AL*	0.95	1.05	59*N*A060V21**20
CNPV*3617AL*	0.95	1.05	59*N*A060V21**20
CNPV*3717AL*	0.97	1.02	59*N*A060V21**20
CNPV*4217AL*	0.95	1.00	59*N*A060V21**20
CNPV*4217AL*	0.95	1.05	59*N*A060V21**20
CNPV*4821AL*	0.97	1.02	59*N*A060V21**20
CSPH*3612AL*	0.97	1.02	59*N*A060V21**20
CSPH*4212AL*	0.98	1.03	59*N*A060V21**20
CSPH*4821AL*	0.98	1.03	59*N*A060V21**20
CAP**3617AL*	0.98	1.03	59*N*A060V21**20
CAP**4817AL*	0.98	1.03	59*N*A060V21**20
CNPV*3617AL*	0.95	1.05	59*N*A060V21**20
CNPV*3617AL*	0.95	1.05	59*N*A060V21**20
CNPV*3717AL*	0.97	1.02	59*N*A060V21**20
CNPV*4217AL*	0.95	1.00	59*N*A060V21**20
CNPV*4217AL*	0.95	1.05	59*N*A060V21**20
CNPV*4821AL*	0.97	1.02	59*N*A060V21**20
CSPH*3612AL*	0.97	1.02	59*N*A060V21**20
CSPH*4212AL*	0.98	1.03	59MN7A060V21**20
CSPH*4821AL*	0.98	1.03	59MN7A060V21**20
CAP**3617AL*	0.97	1.01	59MN7A060V21**20
CAP**4221AL*	0.97	1.01	59MN7A060V21**20

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CAP**4821AL*	0.98	1.03	59MN7A060V21**20
CNPV*4221AL*	0.96	1.06	59MN7A060V21**20
CNPV*4221AL*	0.96	1.06	59MN7A060V21**20
CNPV*4321AL*	0.98	1.03	59MN7A060V21**20
CNPV*4821AL*	0.97	1.02	59MN7A060V21**20
CNPV*3621AL*	0.95	1.00	59MN7A060V21**20
CNPV*4221AL*	0.95	1.00	59MN7A060V21**20
CNPV*4221AL*	0.96	1.01	59MN7A060V21**20
CNPV*4324AL*	0.98	1.03	59MN7A060V21**20
CNPV*4821AL*	0.97	1.01	59MN7A060V21**20
CNPV*4821AL*	0.97	1.02	59MN7A060V21**20
CNPV*4821AL*	0.97	1.02	59MN7A060V21**20
CSPH*3612AL*	0.98	1.03	59MN7A060V21**20
CSPH*4212AL*	0.98	1.03	59MN7A060V21**20
CSPH*4812AL*	0.98	1.03	59MN7A060V21**20

2-STAGE (HI-Stage 5, Lo-Stage 2)				
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Furnace Model
FV4C(NB,F)003L	0.97	1.01	1.06	
FV4C(NB)002L	0.97	1.01	0.99	1.08
CAP**3614AL*	0.96	1.06	0.97	1.09
CAP**3617AL*	0.97	1.07	0.97	1.08
CAP**3614AL*	0.96	1.01	0.97	1.07
CAP**3617AL*	0.97	1.01	0.97	1.06
CAP**3617AL*	0.97	1.02	0.98	1.05
CAP**3621AL*	0.97	1.02	0.98	1.04
CAP**3621AL*	0.98	1.03	0.99	1.05
CNPV*3617AL*	0.97	1.01	0.97	1.05
CNPV*3617AL*	0.97	1.01	0.97	1.05
CNPV*3717AL*	1.01	1.00	1.03	58CTW070-16
CNPV*4217AL*	0.99	1.04	0.99	1.05
CAP**3621AL*	0.97	0.97	0.98	1.02
CAP**4221AL*	0.98	0.98	0.99	1.03
CNPV*4221AL*	0.98	0.98	1.03	58CTW090-16
CNPV*4321AL*	1.01	1.01	1.01	58CTW090-16
CNPV*3621AL*	0.97	1.01	0.97	1.03
CNPV*4221AL*	0.98	0.98	0.98	1.03
CNPV*3621AL*	0.97	0.97	0.97	1.02
CNPV*4221AL*	0.98	0.98	0.98	1.02
CNPV*4324AL*	1.02	0.97	1.01	0.98
CAP**3617AL*	0.96	1.06	0.97	1.12
CAP**3621AL*	0.96	1.06	0.97	1.11
CAP**4221AL*	0.97	1.07	0.97	1.10
CNPV*3617AL*	0.95	1.05	0.96	1.11
CNPV*3717AL*	1.00	1.05	0.99	1.09
CNPV*4821AL*	0.98	1.08	0.98	1.11
CSPH*3612AL*	0.98	1.09	0.98	1.10
CAP**3614AL*	0.97	1.01	0.98	1.08
CAP**3617AL*	0.97	1.01	0.98	1.07
CSPH*3612AL*	0.99	1.04	0.99	1.06
CAP**3617AL*	0.97	1.02	0.98	1.05
CAP**3621AL*	0.97	1.02	0.98	1.04
CAP**4221AL*	0.98	0.98	0.99	1.04
CNPV*3617AL*	0.97	1.01	0.97	1.05
CNPV*4217AL*	0.97	1.01	0.97	1.05

See notes on page 48

2-STAGE (HI-Stage 5, Lo-Stage 2)				
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Furnace Model
CNPV*3617AL*	0.97	1.01	0.97	59*P2A060E17**14
CNPV*3717AL*	1.01	1.01	1.00	59*P2A060E17**14
CNPV*4217AL*	0.99	0.99	0.99	59*P2A060E17**14
CSPH*4821AL*	0.99	0.99	1.04	59*P2A060E17**14
CNPV*3617AL*	0.97	1.02	0.98	59*P2A060E17**14
CAP**3621AL*	0.98	0.98	1.04	59*P2A060E17**16
CAP**4221AL*	0.98	0.98	1.04	59*P2A060E17**16
CNPV*3617AL*	0.97	1.01	0.97	59*P2A060E17**16
CNPV*3717AL*	1.01	1.01	1.00	59*P2A060E17**16
CNPV*4217AL*	0.99	0.99	1.04	59*P2A060E17**16
CAP**3617AL*	0.96	1.12	0.96	59*P5A040E17**12
CAP**3621AL*	0.96	1.12	0.96	59*P5A040E17**12
CAP**4221AL*	0.97	1.13	0.96	59*P5A040E17**12
CNPV*3617AL*	0.95	1.11	0.95	59*P5A040E17**12
CNPV*3617AL*	0.95	1.11	0.95	59*P5A040E17**12
CNPV*3717AL*	1.00	1.11	0.98	59*P5A040E17**12
CNPV*4217AL*	0.98	1.08	0.97	59*P5A040E17**12
CAP**3614AL*	0.95	1.11	0.96	59*P5A060E14**12
CAP**3617AL*	0.96	1.12	0.97	59*P5A060E14**12
CAP**3621AL*	0.97	1.01	0.97	59*P5A060E17**14
CAP**4221AL*	0.97	1.02	0.98	59*P5A060E17**14
CNPV*3617AL*	0.96	1.01	0.97	59*P5A060E17**14
CNPV*3717AL*	1.00	1.05	0.99	59*P5A060E17**14
CNPV*4217AL*	0.98	1.03	0.98	59*P5A060E17**14

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVA.P. AIR °F (°C)	24VNA337/FEANB006L Efficiency Mode Condenser Entering Air Temperature °F (°C)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
		115 (46.1)					105 (40.5)					95 (35)					85 (28.3)					75 (23.9)					65 (18.3)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
		ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†		Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
75 (23.9)	72 (22.2)	1050	32.70	13.63	3.49	34.98	14.48	3.05	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	1050	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86

24VNA937

	COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
A	*F4ANB006L FE4AN(B FJ005L)	1.00	1.00	
	CAP**3617AL*	0.99	1.03	
	CAP**3617AL*	0.01	0.15	58CV(A.X)070-12
	CAP**3617AL*	0.01	0.15	59*N*A060V17***14
	CAP**3617AL*	0.01	0.15	59*N*A080V17***14
	CAP**3617AL*	0.95	1.01	58CV(A.X)070-12
B	CAP**3617AL*	0.96	1.00	58CV(A.X)090-16
	CAP**3621AL*	0.01	0.15	58CV(A.X)110-20
	CAP**3621AL*	0.01	0.15	59*N*A060V17***14
	CAP**3621AL*	0.01	0.15	59*N*A080V17***14
	CAP**3621AL*	0.95	1.01	59MNTA060V21**20
	CAP**3621AL*	0.96	1.02	59*N*A080V21**20
C	CAP**3621AL*	0.96	1.00	59*N*A100V21**22
	CAP**3621AL*	0.96	1.00	58CV(A.X)090-16
	CAP**3621AL*	0.96	1.00	58CV(A.X)110-20
	CAP**4221AL*	0.01	0.15	59*N*A060V17***14
	CAP**4221AL*	0.01	0.15	59*N*A080V17***14
	CAP**4221AL*	0.96	1.03	59MNTA060V21**20
D	CAP**4221AL*	0.97	1.03	59*N*A080V21**20
	CAP**4221AL*	0.97	1.03	59*N*A100V21**22
	CAP**4221AL*	0.97	1.01	58CV(A.X)090-16
	CAP**4221AL*	0.97	1.01	58CV(A.X)110-20
	CAP**4224AL*	0.96	1.03	59MNTA060V21**20
	CAP**4224AL*	0.96	1.00	59*N*A080V21**20
E	CAP**4224AL*	0.96	1.00	59*N*A100V21**22
	CAP**4224AL*	0.96	1.00	59*N*A120V24**22
	CAP**4224AL*	0.96	1.00	58CV(A.X)110-20
	CAP**4224AL*	0.96	1.00	58CV(A.X)135-22
	CAP**4224AL*	0.97	1.01	58CV(A.X)155-22
	CAP**4817AL*	0.01	0.15	59*N*A060V17***14
F	CAP**4817AL*	0.98	1.04	59*N*A080V17***14
	CAP**4817AL*	0.98	1.02	58CV(A.X)070-12
	CAP**4817AL*	0.98	1.02	58CV(A.X)090-16
	CAP**4821AL*	0.01	0.15	58CV(A.X)110-20
	CAP**4821AL*	0.97	1.03	59*N*A060V17***14
	CAP**4821AL*	0.97	1.03	59*N*A080V17***14
G	CAP**4821AL*	0.97	1.03	59MNTA060V21**20
	CAP**4821AL*	0.98	1.02	59*N*A080V21**20
	CAP**4821AL*	0.98	1.02	59*N*A100V21**22
	CAP**4821AL*	0.98	1.02	58CV(A.X)110-20
	CAP**4824AL*	0.98	1.02	58CV(A.X)135-22
	CAP**4824AL*	0.98	1.02	58CV(A.X)155-22
H	CAP**4824AL*	0.98	1.02	59*N*A060V17***14
	CAP**6021AL*	0.99	1.05	59*N*A080V17***14
	CAP**6021AL*	0.99	1.05	59*N*A080V21**20
	CAP**6021AL*	0.99	1.03	59*N*A100V21**22
	CAP**6021AL*	0.99	1.03	58CV(A.X)090-16
	CNP#*3617AL*	0.01	0.15	59*N*A060V17***14
I	CNP#*3617AL*	0.01	0.15	59*N*A080V17***14
	CNP#*4221AL*	0.01	0.15	58CV(A.X)090-16
	CNP#*4221AL*	0.01	0.15	59*N*A060V17***14
	CNP#*4221AL*	0.01	0.15	59MNTA060V21**20
	CNP#*4221AL*	0.01	0.15	59NNTA060V21**20
	CNP#*4221AL*	0.01	0.15	59MNTA060V21**20

COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL
CNPV*4221AL*	0.96	1.03	59°N°A080V21**20	
CNPV*4221AL*	0.96	1.03	59°N°A100V21**22	
CNPV*4221AL*	0.96	1.03	58CV(A,X)090-16	
CNPV*4221AL*	0.96	1.03	58CV(A,X)110-20	
CNPV*4321AL*	0.98	1.05	59°N°A060V17***14	
CNPV*4321AL*	0.99	1.05	59°N°A080V17***14	
CNPV*4321AL*	0.99	1.05	59MNTA060V21**20	
CNPV*4321AL*	0.99	1.03	59°N°A080V21**20	
CNPV*4321AL*	0.99	1.03	59°N°A100V21**22	
CNPV*4321AL*	0.99	1.03	58CV(A,X)090-16	
CNPV*4321AL*	0.99	1.03	58CV(A,X)110-20	
CNPV*4821AL*	0.01	0.15	59°N°A060V17***14	
CNPV*4821AL*	0.98	1.04	59°N°A080V17***14	
CNPV*4821AL*	0.98	1.04	59MNTA060V21**20	
CNPV*4821AL*	0.98	1.02	59°N°A080V21**20	
CNPV*4821AL*	0.98	1.02	59°N°A100V21**22	
CNPV*4821AL*	0.98	1.02	58CV(A,X)090-16	
CNPV*6024AL*	0.99	1.03	59MNTA060V21**20	
CNPV*6024AL*	0.99	1.03	59°N°A080V21**20	
CNPV*6024AL*	0.99	1.03	59°N°A100V21**22	
CNPV*6024AL*	0.99	1.03	58CV(A,X)110-20	
CNPV*6024AL*	0.99	0.99	58CV(A,X)135-22	
CNPV*6024AL*	0.99	0.99	58CV(A,X)155-22	
CNPV*3617AL*	0.01	0.15	59°N°A060V17***14	
CNPV*3617AL*	0.01	0.15	59°N°A080V17***14	
CNPV*3617AL*	0.01	0.15	59MNTA060V21**20	
CNPV*3617AL*	0.95	1.01	58CV(A,X)090-16	
CNPV*3617AL*	0.01	0.15	59°N°A060V17***14	
CNPV*3621AL*	0.01	0.15	59°N°A080V17***14	
CNPV*3621AL*	0.01	0.15	59MNTA060V21**20	
CNPV*3621AL*	0.95	1.01	59°N°A080V21**20	
CNPV*3621AL*	0.96	1.02	59°N°A100V21**22	
CNPV*3621AL*	0.96	1.02	58CV(A,X)090-16	
CNPV*3621AL*	0.96	1.02	58CV(A,X)110-20	
CNPV*3717AL*	0.01	0.15	59°N°A060V17***14	
CNPV*3717AL*	0.98	1.05	59°N°A080V17***14	
CNPV*3717AL*	0.98	1.02	58CV(A,X)090-16	
CNPV*4217AL*	0.01	0.15	59°N°A060V17***14	
CNPV*4217AL*	0.01	0.15	59°N°A080V17***14	
CNPV*4217AL*	0.97	1.03	58CV(A,X)070-12	
CNPV*4217AL*	0.98	1.02	58CV(A,X)090-16	
CNPV*4221AL*	0.01	0.15	59°N°A060V17***14	
CNPV*4221AL*	0.01	0.15	59MNTA060V21**20	
CNPV*4221AL*	0.96	1.02	59°N°A080V21**20	
CNPV*4221AL*	0.96	1.00	59°N°A100V21**22	
CNPV*4221AL*	0.96	1.00	58CV(A,X)090-16	
CNPV*4221AL*	0.96	1.00	58CV(A,X)110-20	
CNPV*4324AL*	0.99	1.03	59MNTA060V21**20	
CNPV*4324AL*	0.98	1.02	59°N°A080V21**20	
CNPV*4324AL*	0.98	1.02	59°N°A100V21**22	
CNPV*4324AL*	0.98	1.02	59°N°A120V24**22	
CNPV*4324AL*	0.99	1.03	58CV(A,X)110-20	
CNPV*4324AL*	0.99	0.99	58CV(A,X)135-22	
CNPV*4324AL*	0.99	0.99	58CV(A,X)155-22	
CNPV*6024AL*	0.98	1.02	59MNTA060V21**20	
CNPV*6024AL*	0.98	1.02	59°N°A080V21**20	
CNPV*6024AL*	0.99	1.03	59°N°A100V21**22	

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CNPV*6024AL*	0.98	1.02	59*N*1A120V24**22
CNPV*6024AL*	0.99	0.99	58CV(A,X)110-20
CNPV*6024AL*	0.99	0.99	58CV(A,X)135-22
CNPV*6024AL*	0.99	0.99	58CV(A,X)155-22
CSPH*3612AL*	0.01	0.15	59*N*A060V17***14
CSPH*3612AL*	0.97	1.03	59*N*A080V17***14
CSPH*3612AL*	0.97	1.03	59MNTA060V21**20
CSPH*3612AL*	0.98	1.04	59*N*A080V21***20
CSPH*3612AL*	0.98	1.04	59*N*1A100V21***22
CSPH*3612AL*	0.98	1.04	59*N*1A120V24**22
CSPH*3612AL*	0.98	1.04	58CV(A,X)070-12
CSPH*3612AL*	0.98	1.02	58CV(A,X)090-16
CSPH*3612AL*	0.98	1.02	58CV(A,X)110-20
CSPH*3612AL*	0.98	1.02	58CV(A,X)135-22
CSPH*3612AL*	0.98	1.02	58CV(A,X)155-22
CSPH*4212AL*	0.01	0.15	59*N*A060V17***14
CSPH*4212AL*	0.98	1.04	59*N*A080V17***14
CSPH*4212AL*	0.98	1.04	59MNTA060V21**20
CSPH*4212AL*	0.98	1.02	59*N*A080V21***20
CSPH*4212AL*	0.98	1.02	59*N*1A100V21***22
CSPH*4212AL*	0.98	1.02	59*N*1A120V24**22
CSPH*4212AL*	0.98	1.05	58CV(A,X)070-12
CSPH*4212AL*	0.98	1.02	58CV(A,X)090-16
CSPH*4212AL*	0.98	1.02	58CV(A,X)110-20
CSPH*4212AL*	0.98	1.02	58CV(A,X)135-22
CSPH*4212AL*	0.99	1.03	58CV(A,X)155-22
CSPH*4812AL*	0.01	0.15	59*N*A060V17***14
CSPH*4812AL*	0.98	1.05	59*N*A080V17***14
CSPH*4812AL*	0.98	1.05	59MNTA060V21**20
CSPH*4812AL*	0.98	1.02	59*N*A080V21***20
CSPH*4812AL*	0.99	1.03	59*N*1A100V21***22
CSPH*4812AL*	0.99	1.03	59*N*1A120V24**22
CSPH*6012AL*	0.99	1.03	58CV(A,X)070-12
CSPH*6012AL*	0.99	1.03	58CV(A,X)090-16
CSPH*6012AL*	0.99	1.03	58CV(A,X)110-20
CSPH*6012AL*	1.00	1.00	58CV(A,X)135-22
CSPH*6012AL*	1.00	1.00	58CV(A,X)155-22

2-STAGE (HI-Stage 5, Lo-Stage 2)					
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model
*FE4ANB006L	1.00	1.00	1.00	1.00	
FE4AN(B)F003L	0.96	0.99	0.98	1.08	
FE4AN(B)F005L	0.99	0.98	0.99	1.03	
FE4ANF002L	0.95	1.02	0.98	1.14	
FE5ANB004L	1.01	1.00	1.01	1.01	
FV4CN(B)F003L	0.96	0.99	0.98	1.06	
FV4CN(B)F005L	0.99	0.98	0.99	1.03	
FV4CNB006L	1.00	0.99	1.00	1.00	
FV4CNF002L	0.95	1.02	0.98	1.12	
CSPH*3612AL	0.97	1.03	0.97	1.07	58CTW045-12
CSPH*4212AL *	0.96	1.03	0.98	1.07	58CTW045-12

24VNA937

See notes on page 48

23

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB ° F		EVAIR AIR		24VNA948 / FE4BNB006 Efficiency Mode Condenser Entering Air Temperature ° F (° C)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
				115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
				ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
Sens†	Total	Sens†	Total		Sens†	Total			Sens†	Total			Sens†	Total			Sens†	Total			Sens†	Total		Sens†	Total																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
STAGE 5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
75 (23.9)	72 (22.2)		44.82	18.57	5.52				47.96	19.76	4.88				50.99	20.91	4.29				53.98	22.06	3.74																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 48

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

24VNA948

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*FE4NAB006L	1.00	1.00	
FE4NAB1F005L	0.98	0.98	
CAP**4817AL*	0.97	1.01	58CV(A.X)090-16
CSPH*4812AL*	0.98	1.03	58CV(A.X)090-16
CSPH*6012AL*	0.99	0.99	58CV(A.X)090-16
CAP**4821AL*	0.97	1.01	58CV(A.X)110-20
CAP**6021AL*	0.99	1.06	58CV(A.X)110-20
CNPV*4821AL*	0.97	1.06	58CV(A.X)110-20
CNPV*4821AL*	0.97	1.01	58CV(A.X)110-20
CSPH*4812AL*	0.98	1.03	58CV(A.X)110-20
CAP**4824AL*	0.97	1.00	58CV(A.X)110-20
CAP**6024AL*	0.99	0.97	58CV(A.X)135-22
CNPV*6024AL*	0.99	0.99	58CV(A.X)135-22
CNPV*6024AL*	0.99	1.04	58CV(A.X)135-22
CNPV*6124AL*	0.98	1.05	58CV(A.X)135-22
CNPV*4824AL*	0.96	1.03	58CV(A.X)135-22
CNPV*4824AL*	0.99	0.99	58CV(A.X)155-22
CNPV*6024AL*	0.98	0.99	58CV(A.X)155-22
CNPV*6024AL*	0.99	1.00	58CV(A.X)155-22
CNPV*6124AL*	1.00	1.05	58CV(A.X)155-22
CNPV*4824AL*	0.98	0.98	58CV(A.X)155-22
CNPV*6024AL*	0.99	0.99	58CV(A.X)155-22
CNPV*6124AL*	1.00	1.00	58CV(A.X)155-22
CSPH*4812AL*	0.98	0.98	58CV(A.X)155-22
CSPH*6012AL*	1.00	1.00	58CV(A.X)155-22
CAP**4821AL*	0.97	1.01	59"N*A080V21**20
CAP**6021AL*	0.99	1.04	59"N*A080V21**20
CNPV*4821AL*	0.97	1.06	59"N*A080V21**20
CNPV*4821AL*	0.97	1.01	59"N*A080V21**20
CSPH*4812AL*	0.98	1.03	59"N*A080V21**20
CSPH*6012AL*	0.99	0.99	59"N*A080V21**20
CAP**4821AL*	0.97	1.01	59"N*A100V21**22
CNPV*4821AL*	0.97	1.01	59"N*A100V21**22
CSPH*4812AL*	0.98	1.03	59"N*A100V21**22
CSPH*6012AL*	0.99	0.99	59"N*A100V21**22
CAP**4824AL*	0.97	1.01	59"N*A120V24**22
CAP**6024AL*	0.99	1.04	59"N*A120V24**22
CNPV*6024AL*	0.99	1.04	59"N*A120V24**22
CNPV*6124AL*	0.98	1.04	59"N*A120V24**22
CNPV*4824AL*	0.97	1.01	59"N*A120V24**22
CNPV*6024AL*	0.99	1.04	59"N*A120V24**22
CNPV*4821AL*	0.97	1.01	59"N*A120V24**22
CSPH*4812AL*	0.98	1.03	59"N*A120V24**22
CSPH*6012AL*	0.99	0.99	59MN7A060V21**20
CAP**6021AL*	0.97	1.06	59MN7A060V21**20
CNPV*4821AL*	0.97	1.06	59MN7A060V21**20
CNPV*4821AL*	0.97	1.06	59MN7A060V21**20
CSPH*4812AL*	0.98	1.06	59MN7A060V21**20
CSPH*6012AL*	0.99	1.04	59MN7A060V21**20

2-STAGE (HI-Stage 5, Lo-Stage 2)					
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model
*FV4CNB006L	1.00	1.00	1.00	1.00	
FV4CNB1F005L	0.99	0.99	0.99	1.03	
CAP**4817AL*	0.96	1.11	0.97	1.12	58PH*070-16
CSPH*4812AL*	0.97	1.06	0.98	1.13	58PH*070-16
CSPH*4821AL*	0.96	1.00	0.98	1.06	58PH*090-16
CAP**6021AL*	0.99	1.04	0.98	1.05	58PH*090-16
CNPV*4821AL*	0.97	1.01	0.98	1.06	58PH*090-16
CNPV*4821AL*	0.97	1.01	0.98	1.06	58PH*090-16
CSPH*4812AL*	0.97	1.01	0.98	1.06	58PH*110-20
CAP**4821AL*	0.96	1.00	0.98	1.05	58PH*110-20
CNPV*4821AL*	0.97	1.01	0.98	1.05	58PH*110-20
CNPV*4821AL*	0.97	1.01	0.98	1.05	58PH*110-20
CSPH*4812AL*	0.97	0.97	0.99	1.10	58PH*110-20
CSPH*6012AL*	0.99	0.99	0.99	1.04	58PH*110-20
CAP**6024AL*	0.99	0.99	0.99	1.10	58PH*135-20
CSPH*4812AL*	0.97	1.01	0.99	1.11	58PH*135-20
CAP**4821AL*	0.96	1.00	0.97	1.05	58CTW090-16
CAP**6021AL*	0.99	1.04	0.98	1.04	58CTW090-16
CNPV*4821AL*	0.97	1.01	0.98	1.04	58CTW090-16
CNPV*4821AL*	0.97	1.01	0.98	1.04	58CTW090-16
CSPH*4812AL*	0.97	1.01	0.98	1.05	58CTW090-16
CAP**4821AL*	0.97	1.01	0.98	1.03	58CTW110-22
CNPV*4821AL*	0.97	1.01	0.98	1.03	58CTW110-22
CSPH*4812AL*	0.98	1.02	0.98	1.03	58CTW110-22
CSPH*6012AL*	1.00	1.00	0.99	1.02	58CTW110-22
CAP**4824AL*	0.97	1.01	0.98	1.03	58CTW135-22
CAP**6024AL*	0.99	0.99	0.98	1.02	58CTW135-22
CNPV*6024AL*	0.99	0.99	0.99	1.02	58CTW135-22
CNPV*4824AL*	0.97	1.01	0.98	1.02	58CTW135-22
CNPV*6024AL*	0.99	0.99	0.99	1.02	58CTW135-22
CNPV*6124AL*	1.00	1.00	1.00	1.02	58CTW135-22
CSPH*6012AL*	1.00	1.00	0.99	1.02	58CTW135-22
CAP**4817AL*	0.97	1.01	0.98	1.06	59"P2A080E17**16
CSPH*4812AL*	0.97	1.01	0.98	1.07	59"P2A080E17**16
CAP**4821AL*	0.97	1.01	0.97	1.03	59"P2A080E21**20
CAP**6021AL*	0.99	0.99	0.98	1.03	59"P2A080E21**20
CNPV*4821AL*	0.97	1.01	0.98	1.03	59"P2A080E21**20
CNPV*4821AL*	0.97	1.01	0.98	1.03	59"P2A080E21**20
CSPH*4812AL*	0.98	1.02	0.98	1.04	59"P2A080E21**20
CAP**4821AL*	0.97	1.01	0.97	1.04	59"P2A100E21**20
CNPV*4821AL*	0.99	0.99	0.98	1.03	59"P2A100E21**20
CNPV*4821AL*	0.97	1.01	0.98	1.03	59"P2A100E21**20
CSPH*4812AL*	0.98	1.02	0.98	1.04	59"P2A100E21**20
CSPH*6012AL*	1.00	1.00	0.99	1.03	59"P2A100E21**20
CAP**4824AL*	0.97	1.01	0.98	1.04	59"P2A120E24**20
CAP**6024AL*	0.99	0.99	0.98	1.03	59"P2A120E24**20
CNPV*6024AL*	0.99	1.04	0.99	1.03	59"P2A120E24**20
CNPV*6124AL*	1.00	1.05	0.98	1.03	59"P2A120E24**20
CNPV*4824AL*	0.97	1.01	0.98	1.04	59"P2A120E24**20
CNPV*6024AL*	0.99	0.99	0.99	1.03	59"P2A120E24**20
CNPV*6124AL*	1.00	1.00	0.99	1.02	59"P2A120E24**20
CSPH*4812AL*	0.98	1.02	0.98	1.04	59"P2A120E24**20

2-STAGE (HI-Stage 5, Lo-Stage 2)					
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model
CSPH*6012AL*	1.00	1.00	0.99	1.03	59*P2A120E24**20
CAP**4817AL*	0.96	1.05	0.97	1.08	59*P5A090E17**16
CSPH*4812AL*	0.97	1.06	0.97	1.08	59*P5A090E17**16
CNPV*4821AL*	0.97	1.01	0.96	1.02	59*P5A090E21**20
CNPV*4821AL*	0.97	1.01	0.96	1.02	59*P5A090E21**20
CSPH*4812AL*	0.97	1.01	0.96	1.02	59*P5A090E21**20
CAP**4821AL*	0.96	1.00	0.98	1.11	59*P5A100E21**20
CAP**6021AL*	0.99	1.04	0.99	1.10	59*P5A100E21**20
CAP**6021AL*	0.99	1.04	0.99	1.10	59*P5A100E21**20
CNPV*4821AL*	0.97	1.01	0.99	1.11	59*P5A100E21**20
CSPH*4812AL*	0.97	1.01	0.99	1.11	59*P5A100E21**20
CSPH*6012AL*	0.96	0.99	1.00	1.10	59*P5A100E21**20
CAP**6024AL*	0.99	1.04	0.99	1.14	59*P5A120E24**22

See notes on page 48

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)		EVAP AIR		24VNA949 / *CHNPV*5024AL* Efficiency Mode Condenser Entering Air Temperature °F (°C)																						
				115 (46.1)			105 (40.5)			95 (35)			85 (29.4)			75 (23.9)			65 (18.3)							
				ID SCFM	Capacity MBtuh Total	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Total Sys. KW**					
75 (23.9)	EWB °F (°C)	1200	45.15	18.59	4.64	1200	47.22	19.34	4.10	1200	49.13	20.04	3.62	1200	50.85	20.69	3.20	1200	52.44	21.29	2.83	1200	53.90	21.86	2.50	
			67	40.99	24.58		4.57	42.88	25.28		4.03	44.59	25.92		3.56	46.15	26.50		3.14	47.59	27.05		2.77	48.89	27.54	2.45
			63	37.94	29.29		4.53	39.67	29.93		3.99	41.26	30.52		3.52	42.70	31.05		3.10	44.02	31.54		2.74	45.22	31.98	2.42
			57	34.94	34.94		4.48	36.17	36.17		3.94	37.25	37.25		3.47	38.39	37.79		3.05	39.47	38.20		2.69	40.46	38.55	2.38
			72	45.05	24.59		4.65	47.12	25.29		4.10	49.03	25.93		3.62	50.75	26.52		3.20	52.34	27.07		2.83	53.80	27.58	2.50
80 (26.7)	EWB °F (°C)	1200	40.90	30.52	4.57	1200	42.79	31.16	4.03	1200	44.50	31.73	3.56	1200	46.06	32.26	3.14	1200	47.51	32.74	2.77	1200	48.81	33.18	2.45	
			63	38.05	35.23		4.53	39.74	35.81		3.99	41.31	36.35		3.52	42.73	36.82		3.10	44.03	37.24		2.74	45.22	37.62	2.42
			57	37.10	37.10		4.51	38.37	38.37		3.97	39.51	39.51		3.50	40.51	40.51		3.08	41.42	41.42		2.71	42.21	42.21	2.39
			STAGE 3																							
			72	31.12	13.04		2.69	33.04	13.72		2.42	34.76	14.34		2.13	36.52	14.98		1.89	38.19	15.60		1.67	39.82	16.21	1.47
75 (23.9)	EWB °F (°C)	1100	27.98	17.71	2.68	1100	29.74	18.37	2.42	1100	31.35	18.98	2.12	1100	32.93	19.60	1.88	1100	34.47	20.20	1.67	1100	35.92	20.78	1.46	
			63	25.70	21.37		2.67	27.30	22.01		2.41	28.81	22.61		2.11	30.27	23.20		1.88	31.66	23.76		1.67	33.00	24.31	1.47
			57	24.22	24.22		2.66	25.43	25.43		2.41	26.54	26.54		2.11	27.60	27.60		1.88	28.59	28.59		1.67	29.51	29.51	1.47
			72	31.03	17.82		2.69	32.96	18.48		2.42	34.67	19.07		2.13	36.43	19.69		1.89	38.11	20.29		1.67	39.73	20.88	1.47
			67	27.94	22.44		2.68	29.89	23.08		2.42	31.28	23.67		2.12	32.86	24.25		1.88	34.39	24.83		1.67	35.84	25.38	1.46
80 (26.7)	EWB °F (°C)	1100	25.99	25.99	2.67	1100	27.49	26.68	2.41	1100	28.94	27.28	2.11	1100	30.37	27.85	1.88	1100	31.74	28.40	1.67	1100	33.06	28.93	1.47	
			57	25.95	25.95		2.67	27.20	27.20		2.41	28.35	28.35		2.11	29.45	29.45		1.88	30.47	30.47		1.67	31.45	31.45	1.47
			STAGE 1																							
			72	24.22	10.36		1.81	26.07	11.01		1.70	22.44	9.23		0.80	22.15	9.12		0.98	23.77	9.73		0.84	25.39	10.35	0.64
			67	21.60	14.43		1.81	23.29	15.08		1.71	18.32	11.38		1.06	19.80	12.00		0.98	21.26	12.62		0.84	22.74	13.26	0.66
75 (23.9)	EWB °F (°C)	1100	19.74	17.61	1.80	1100	21.27	18.26	1.71	875	16.73	13.62	1.05	875	18.09	14.24	0.98	875	19.44	14.88	0.85	875	20.79	15.51	0.67	
			63	19.08	19.08		1.80	20.28	20.28		1.71	15.60	15.60		1.05	16.63	16.63		0.98	17.64	17.64		0.86	18.62	18.62	0.70
			57	24.14	14.58		1.81	25.99	15.23		1.70	20.47	11.51		1.08	22.08	12.12		0.98	23.71	12.75		0.84	25.33	13.38	0.64
			72	21.61	18.61		1.81	23.27	19.26		1.71	18.30	14.33		1.06	19.76	14.96		0.98	21.22	15.60		0.84	22.70	16.25	0.66
			63	20.60	20.60		1.80	21.86	21.86		1.71	16.89	16.55		1.06	18.19	17.21		0.98	19.52	17.86		0.85	20.85	18.52	0.67
80 (26.7)	EWB °F (°C)	1100	20.56	20.56	1.80	1100	21.82	21.82	1.71	875	16.76	16.76	1.05	875	17.83	17.83	0.98	875	18.88	18.88	0.85	875	19.90	19.90	0.68	
			57	25.95	20.56		1.80	21.82	21.82		1.71	16.76	16.76		1.05	17.83	17.83		0.98	18.88	18.88		0.85	19.90	19.90	0.68
			STAGE 1																							
			STAGE 3																							
			STAGE 5																							

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

24VNA949

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*CNPV*6024AL*	1.00	1.00	58CV(A.X)155-22
FE4AN(B.F)05L	0.99	0.99	
FE4ANB006L	1.00	1.00	
CAP**4821AL*	0.97	1.03	59MN7A060V21**20
CAP**4824AL*	0.98	1.00	59N*A080V21**20
CAP**4824AL*	0.98	1.00	59N*A100V21**22
CAP**4824AL*	0.98	1.00	59N*A120V24**22
CAP**4824AL*	0.98	1.00	58CV(A.X)110-20
CAP**4824AL*	0.98	1.00	58CV(A.X)135-22
CAP**4824AL*	0.98	1.00	58CV(A.X)155-22
CAP**6021AL*	1.00	1.00	58CV(A.X)090-16
CAP**6021AL*	0.99	1.06	59MN7A060V21**20
CAP**6024AL*	1.00	1.00	59N*A080V21**20
CAP**6024AL*	1.00	1.00	59N*A100V21**22
CAP**6024AL*	1.00	1.00	59N*A120V24**22
CAP**6024AL*	1.00	1.00	58CV(A.X)110-20
CAP**6024AL*	1.00	1.00	58CV(A.X)135-22
CAP**6024AL*	1.00	1.00	58CV(A.X)155-22
CNPV*4821AL*	0.98	1.00	58CV(A.X)090-16
CNPV*4821AL*	0.98	1.04	59MN7A060V21**20
CNPV*6024AL*	0.99	0.99	59N*A080V21**20
CNPV*6024AL*	1.00	1.00	59N*A100V21**22
CNPV*6024AL*	1.00	1.00	59N*A120V24**22
CNPV*6024AL*	1.00	1.00	58CV(A.X)110-20
CNPV*6024AL*	1.00	1.00	58CV(A.X)135-22
CNPV*6024AL*	1.01	0.97	58CV(A.X)155-22
CNPV*6124AL*	1.01	0.97	

2-STAGE (Hi-Stage 5, Lo-Stage 2)										
Cooling Indoor Model		High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model				
*CNPV*6024AL*		1.00	1.00	1.00	1.00	58CV(A.X)155-22				
FE4AN(B.F)05L		0.99	0.99	1.00	1.02					
FE4ANB006L		1.01	0.99	1.01	0.99					
FV4CN(B.F)05L		1.00	0.99	1.00	1.02					
FV4CNB006L		1.01	0.99	1.01	0.99					
CAP**4821AL*		0.97	0.99	0.98	1.05	58PH*090-16				
CAP**6021AL*		1.00	1.03	1.00	1.04	58PH*090-16				
CNPV*4821AL*		0.98	1.02	0.99	1.05	58PH*090-16				
CNPV*4821AL*		0.98	1.01	0.99	1.05	58PH*090-16				
CSPH*4812AL*		0.98	1.00	0.99	1.04	58PH*110-20				
CSPH*6012AL*		1.00	1.03	1.01	1.04	58PH*110-20				
CAP**4821AL*		0.97	0.99	0.98	1.04	58PH*110-20				
CAP**6021AL*		1.00	0.98	1.00	1.04	58PH*110-20				
CNPV*4821AL*		0.98	1.00	0.99	1.04	58PH*110-20				
CNPV*4821AL*		0.98	1.00	1.00	1.05	58PH*110-20				
CSPH*4812AL*		1.00	0.98	1.01	1.04	58PH*110-20				
CAP**4821AL*		0.97	0.99	0.98	1.03	58CTW090-16				
CAP**6021AL*		1.00	1.03	0.99	1.04	58CTW090-16				
CNPV*4821AL*		0.98	1.00	0.98	1.03	58CTW090-16				
CNPV*4821AL*		0.98	1.00	0.98	1.03	58CTW090-16				
CSPH*4812AL*		0.99	1.01	0.99	1.02	58CTW100-22				
CSPH*6012AL*		1.00	1.03	1.00	1.02	58CTW100-22				
CAP**6021AL*		0.98	1.00	0.99	1.02	58CTW100-22				
CNPV*4821AL*		0.98	1.00	0.99	1.02	58CTW100-22				
CSPH*4812AL*		0.99	1.01	0.99	1.02	58CTW100-22				
CSPH*6012AL*		1.01	0.99	1.01	1.02	58CTW100-22				
CAP**4824AL*		0.98	1.00	0.98	1.02	58CTW135-22				
CAP**6024AL*		1.00	0.98	0.99	1.01	58CTW135-22				
CNPV*6024AL*		1.00	1.00	1.00	1.01	58CTW135-22				
CNPV*6124AL*		1.00	1.00	1.00	1.02	58CTW135-22				
CNPV*4824AL*		0.98	1.00	0.98	1.01	58CTW135-22				
CNPV*6024AL*		1.00	0.99	1.00	1.01	58CTW135-22				
CNPV*6124AL*		1.01	0.99	1.02	1.01	58CTW135-22				
CSPH*4812AL*		0.99	1.01	0.99	1.02	58CTW135-22				
CSPH*6012AL*		1.00	0.98	1.01	1.02	58CTW135-22				
CAP**4817AL*		0.98	1.00	0.98	1.05	59P2A080E17**16				
CSPH*6012AL*		1.00	1.03	1.00	1.05	59P2A080E17**16				
CAP**4821AL*		0.98	1.00	0.98	1.03	59P2A080E21**20				
CAP**6021AL*		1.00	1.03	0.99	1.02	59P2A080E21**20				
CNPV*4821AL*		0.98	1.00	0.98	1.02	59P2A080E21**20				
CNPV*4821AL*		0.98	1.00	0.98	1.02	59P2A080E21**20				
CSPH*4812AL*		0.99	1.01	0.99	1.03	59P2A080E21**20				
CSPH*6012AL*		1.01	1.00	1.00	1.01	59P2A080E21**20				
CAP**4821AL*		0.98	1.00	0.98	1.03	59P2A100E21**20				
CAP**6021AL*		1.00	1.03	0.99	1.02	59P2A100E21**20				
CNPV*4821AL*		0.98	1.00	0.98	1.02	59P2A100E21**20				
CNPV*4821AL*		0.98	1.00	0.98	1.02	59P2A100E21**20				
CSPH*4812AL*		0.99	1.01	0.99	1.03	59P2A100E21**20				
CSPH*6012AL*		1.01	1.00	1.00	1.01	59P2A100E21**20				
CAP**4821AL*		0.98	1.00	0.98	1.03	59P2A100E21**20				
CAP**6021AL*		1.00	1.03	0.99	1.02	59P2A100E21**20				
CNPV*4821AL*		0.98	1.00	0.98	1.02	59P2A100E21**20				
CNPV*4821AL*		0.98	1.00	0.98	1.02	59P2A100E21**20				
CSPH*4812AL*		0.99	1.01	0.99	1.03	59P2A100E21**20				
CSPH*6012AL*		1.01	1.00	1.00	1.01	59P2A100E21**20				
CAP**4824AL*		1.00	1.03	0.99	1.02	59P2A120E24**20				
CAP**6024AL*		1.00	1.03	0.99	1.02	59P2A120E24**20				
CNPV*6024AL*		1.00	1.03	1.00	1.02	59P2A120E24**20				
CNPV*6124AL*		1.01	1.00	1.01	1.02	59P2A120E24**20				
CNPV*6124AL*		1.01	1.00	1.01	1.02	59P2A120E24**20				
CNPV*6124AL*		1.01	1.00	1.01	1.02	59P2A120E24**20				

2-STAGE (Hi-Stage 5, Lo-Stage 2)												
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model							
CSPH*4812AL*	0.99	1.01	0.99	1.03	59P2A120E24**20							
CSPH*6012AL*	1.01	1.04	1.00	1.02	59P2A120E24**20							
CAP**4821AL*	0.97	0.99	0.96	1.01	59P5A080E21**20							
CAP**4821AL*	0.97	0.99	0.99	1.10	59P5A100E21**20							
CSPH*4812AL*	0.98	1.00	1.00	1.10	59P5A100E21**20							
CAP**4821AL*	0.97	0.99	0.98	1.07	59P6A080E21**20							
CAP**6021AL*	0.99	1.01	1.00	1.07	59P6A080E21**20							
CNPV*4821AL*	0.98	1.01	0.99	1.07	59P6A080E21**20							
CNPV*4821AL*	0.98	1.00	0.99	1.07	59P6A080E21**20							
CSPH*4812AL*	0.98	1.00	0.99	1.07	59P6A080E21**20							
CAP**4821AL*	0.97	0.99	0.98	1.06	59P6A100E21**20							
CAP**6021AL*	0.99	1.01	1.00	1.06	59P6A100E21**20							
CNPV*4821AL*	0.98	1.00	0.99	1.06	59P6A100E21**20							
CNPV*4821AL*	0.98	1.00	0.99	1.06	59P6A100E21**20							
CSPH*4812AL*	1.00	1.03	1.01	1.06	59P6A100E21**20							
CAP**4824AL*	0.97	0.99	0.98	1.05	59P6A120E24**22							
CNPV*6024AL*	0.99	1.01	1.01	1.06	59P6A120E24**22							
CNPV*6124AL*	1.01	1.04	1.02	1.05	59P6A120E24**22							
CNPV*6124AL*	1.01	1.04	1.02	1.05	59P6A120E24**22							
CSPH*4812AL*	0.98	1.00	1.00	1.11	59P6A120E24**22							
CSPH*6012AL*	1.00	1.03	1.01	1.06	59P6A120E24**22							

See notes on page 48

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

24VNA960 / FE49NB00L Efficiency Mode Condenser Entering Air Temperature ° F (° C)																															
EDB ° F (° C)	EVAR AIR ° F (° C)	115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)									
		ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**	ID SCFM	Capacity MBtuh		Total Sys. KW**						
			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†		Total	Sens†	Total	Sens†	Total	Sens†
STAGE 5																															
75 (23.9)	72 (22.2)		55.38	22.79	7.70		59.00	24.17	6.73			62.54	25.53	5.88			65.96	26.86	5.13			69.30	28.16	4.47			72.59	29.46	3.89		
	67 (19.4)		50.63	30.18	7.50		53.95	31.68	6.54		1600		57.12	33.14	5.70		1600		4.96		1600		63.25	35.99	4.32		1600		66.21	37.38	3.75
	63 (17.2)		47.11	36.00	7.35		50.18	37.58	6.40				53.13	39.12	5.57			55.99	40.62	4.84			58.78	42.11	4.21			61.52	43.58	3.65	
	57 (13.9)		43.16	43.16	7.19		45.55	45.55	6.23				47.97	47.63	5.40			50.44	49.37	4.69			52.86	51.01	4.06			55.26	52.62	3.52	
	72 (22.2)		55.24	30.04	7.70		58.86	31.53	6.73				62.40	33.00	5.88			65.82	34.44	5.13			69.15	35.85	4.47			72.44	37.26	3.89	
80 (26.7)	67 (19.4)		50.50	37.37	7.50		53.83	38.98	6.54		1600		57.00	40.53	5.70		1600		4.96		1600		63.13	43.59	4.32		1600		66.10	45.08	3.75
	63 (17.2)		47.09	43.10	7.35		50.13	44.81	6.40				53.07	46.46	5.57			55.91	48.08	4.84			58.70	49.67	4.21			61.44	51.25	3.65	
	57 (13.9)		45.62	45.62	7.29		48.12	48.12	6.33				50.51	50.51	5.49			52.83	52.83	4.76			55.06	55.06	4.12			57.24	57.24	3.56	
STAGE 3																															
75 (23.9)	72 (22.2)		35.94	15.07	3.39		38.40	15.98	3.08				40.44	16.73	2.76			42.79	17.61	2.51			45.10	18.48	2.29			47.36	19.34	2.08	
	67 (19.4)		32.49	20.54	3.35		34.72	21.48	3.05		1350		36.67	22.32	2.72		1350		2.47		1350		40.88	24.15	2.24		1350		42.94	25.05	2.04
	63 (17.2)		29.95	24.83	3.33		32.01	25.81	3.03				33.87	26.70	2.69			35.85	27.65	2.44			37.78	28.59	2.22			39.68	29.52	2.01	
	57 (13.9)		28.14	28.14	3.32		29.76	29.76	3.02				31.24	31.24	2.67			32.75	32.75	2.42			34.21	34.21	2.19			35.65	35.65	1.99	
	72 (22.2)		35.82	20.59	3.39		38.29	21.54	3.08				40.32	22.34	2.76			42.67	23.26	2.51			44.98	24.17	2.29			47.24	25.07	2.08	
80 (26.7)	67 (19.4)		32.39	26.01	3.35		34.62	26.99	3.05		1350		36.56	27.87	2.72		1350		2.47		1350		40.78	29.77	2.24		1350		42.84	30.72	2.04
	63 (17.2)		30.07	30.04	3.29		32.09	31.18	3.03				33.90	32.16	2.69			35.85	33.17	2.44			37.76	34.16	2.22			39.65	35.14	2.01	
	57 (13.9)		30.02	30.02	3.33		31.70	31.70	3.03				33.22	33.22	2.68			34.80	34.80	2.43			36.33	36.33	2.21			37.82	37.82	2.00	
STAGE 1																															
75 (23.9)	72 (22.2)		26.64	11.34	1.89		28.56	12.02	1.84				20.89	8.78	1.03			22.26	9.26	1.00			23.59	9.73	0.91			24.89	10.21	0.75	
	67 (19.4)		23.86	15.71	1.89		25.60	16.40	1.84		1200		18.63	11.93	1.02		975		1.00		975		21.11	12.85	0.92		975		22.30	13.31	0.77
	63 (17.2)		21.85	19.14	1.89		23.45	19.83	1.84				16.95	14.38	1.01			18.11	14.83	1.00			19.24	15.26	0.92			20.34	15.69	0.79	
	57 (13.9)		20.91	20.91	1.88		22.14	22.14	1.84				15.97	15.97	1.01			16.81	16.81	1.00			17.62	17.62	0.94			18.38	18.38	0.81	
	72 (22.2)		26.55	15.84	1.89		28.46	16.52	1.84				20.81	12.06	1.03			22.18	12.52	1.00			23.51	12.97	0.91			24.81	13.42	0.75	
80 (26.7)	67 (19.4)		23.79	20.16	1.89		25.52	20.85	1.84		1200		18.58	15.17	1.02		975		1.00		975		21.05	16.05	0.92		975		22.24	16.48	0.77
	63 (17.2)		22.48	22.48	1.89		23.77	23.77	1.84				17.25	17.25	1.01			18.20	17.98	1.00			19.28	18.43	0.92			20.35	18.85	0.79	
	57 (13.9)		22.44	22.44	1.89		23.72	23.72	1.84				17.21	17.21	1.01			18.08	18.08	1.00			18.91	18.91	0.93			19.70	19.70	0.80	
Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.																															

See additional notes on page 48

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

24VNA960

COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL			
*FE4ANB006L		1.00	1.00	58CV(A.X)110-20			
CAP**6021AL*		0.99	0.99	58CV(A.X)110-20			
CAP**6024AL*		0.99	0.99	58CV(A.X)110-20			
CNPH*6024AL*		0.99	1.04	58CV(A.X)110-20			
CNPH*6124AL*		0.99	1.04	58CV(A.X)110-20			
CNPV*6024AL*		0.98	0.98	58CV(A.X)110-20			
CNPV*6124AL*		1.00	1.00	58CV(A.X)110-20			
CSPH*6012AL*		1.00	1.00	58CV(A.X)110-20			
CAP**6024AL*		0.99	0.99	58CV(A.X)135-22			
CNPH*6024AL*		0.99	0.99	58CV(A.X)135-22			
CNPH*6124AL*		1.00	1.00	58CV(A.X)135-22			
CNPV*6024AL*		0.98	0.98	58CV(A.X)135-22			
CNPV*6124AL*		1.00	1.00	58CV(A.X)135-22			
CSPH*6012AL*		1.00	1.00	58CV(A.X)155-22			
CAP**6024AL*		1.00	1.00	58CV(A.X)155-22			
CNPH*6024AL*		1.00	1.00	58CV(A.X)155-22			
CNPH*6124AL*		1.00	1.00	58CV(A.X)155-22			
CNPV*6024AL*		0.99	0.99	58CV(A.X)155-22			
CNPV*6124AL*		1.00	1.00	58CV(A.X)155-22			
CSPH*6012AL*		1.00	1.00	58CV(A.X)155-22			
CAP**6021AL*		0.99	1.04	59*N*A080V21**20			
CAP**6024AL*		0.99	1.04	59*N*A080V21**20			
CNPH*6024AL*		0.99	1.04	59*N*A080V21**20			
CNPH*6124AL*		0.98	1.04	59*N*A080V21**20			
CNPV*6024AL*		0.98	1.03	59*N*A080V21**20			
CNPV*6124AL*		0.99	1.04	59*N*A080V21**20			
CSPH*6012AL*		0.99	1.04	59*N*A100V21**22			
CAP**6021AL*		0.99	0.99	59*N*A100V21**22			
CNPH*6024AL*		0.99	1.04	59*N*A100V21**22			
CNPH*6124AL*		0.98	1.04	59*N*A100V21**22			
CNPV*6024AL*		0.98	1.00	59*N*A100V21**22			
CNPV*6124AL*		1.00	1.00	59*N*A100V21**22			
CSPH*6012AL*		1.00	1.00	59*N*A120V24**22			
CAP**6024AL*		0.99	1.04	59*N*A120V24**22			
CNPH*6024AL*		0.99	1.04	59*N*A120V24**22			
CNPH*6124AL*		0.99	1.04	59*N*A120V24**22			
CNPV*6024AL*		0.98	1.03	59*N*A120V24**22			
CNPV*6124AL*		0.99	1.00	59*N*A120V24**22			
CSPH*6012AL*		1.00	1.00	59*N*A120V24**22			
CAP**6021AL*		0.98	1.03	59MN7A060V21**20			
CNPH*6024AL*		0.98	1.03	59MN7A060V21**20			
CNPH*6124AL*		0.98	1.09	59MN7A060V21**20			
CNPH*6124AL*		0.98	1.09	59MN7A060V21**20			
CNPV*6024AL*		0.97	1.02	59MN7A060V21**20			
CNPV*6124AL*		0.99	1.04	59MN7A060V21**20			
CSPH*6012AL*		0.99	1.04	59MN7A060V21**20			

Cooling Indoor Model		2-STAGE (HI-Stage 5, Lo-Stage 2)				Furnace Model	
High Speed Cap.	Power	Low Speed Cap.	Power	High Speed Cap.	Power	Furnace Model	
*FV4CNB006L	1.00	1.00	1.00	1.00	1.00	58PH*110-20	
CAP**6021AL*	1.01	1.06	1.01	1.07	1.04	58PH*110-20	
CSPH*6012AL*	1.02	1.07	1.00	1.04	1.04	58PH*110-20	
CAP**6024AL*	1.01	1.06	1.00	1.11	1.06	58PH*135-20	
CNPH*6024AL*	1.01	1.06	1.01	1.06	1.06	58PH*135-20	
CNPH*6124AL*	1.01	1.06	1.01	1.12	1.06	58PH*135-20	
CNPV*6024AL*	1.00	1.05	1.01	1.06	1.06	58PH*135-20	
CNPV*6124AL*	1.02	1.07	1.00	1.03	1.03	58PH*135-20	
CSPH*6012AL*	1.02	1.07	1.00	1.05	1.05	58PH*135-20	
CAP**6021AL*	1.01	1.06	1.01	1.07	1.07	58CTW110-22	
CSPH*6012AL*	1.02	1.07	1.00	1.04	1.04	58CTW110-22	
CAP**6024AL*	1.01	1.06	1.01	1.06	1.06	58CTW135-22	
CNPH*6024AL*	1.01	1.06	1.01	1.06	1.06	58CTW135-22	
CNPH*6124AL*	1.01	1.06	1.01	1.06	1.06	58CTW135-22	
CNPV*6024AL*	1.00	1.05	1.01	1.06	1.06	58CTW135-22	
CNPV*6124AL*	1.02	1.07	1.01	1.04	1.04	58CTW135-22	
CSPH*6012AL*	1.02	1.07	1.00	1.04	1.04	58CTW135-22	
CAP**6021AL*	1.01	1.06	1.01	1.07	1.07	59*P2A080E21**20	
CSPH*6012AL*	1.02	1.07	1.00	1.05	1.05	59*P2A080E21**20	
CAP**6021AL*	1.01	1.06	1.01	1.07	1.07	59*P2A100E21**20	
CSPH*6012AL*	1.01	1.06	1.00	1.05	1.05	59*P2A100E21**20	
CAP**6024AL*	1.01	1.06	1.01	1.07	1.07	59*P2A120E24**20	
CNPH*6024AL*	1.01	1.06	1.01	1.07	1.07	59*P2A120E24**20	
CNPH*6124AL*	1.01	1.06	1.01	1.07	1.07	59*P2A120E24**20	
CNPV*6024AL*	1.00	1.05	1.01	1.07	1.07	59*P2A120E24**20	
CNPV*6124AL*	1.02	1.07	1.00	1.04	1.04	59*P2A120E24**20	
CSPH*6012AL*	1.02	1.07	1.00	1.05	1.05	59*P2A120E24**20	
CAP**6021AL*	0.99	1.04	1.01	1.11	1.11	59*P5A080E21**20	
CSPH*6012AL*	1.00	1.05	1.01	1.10	1.10	59*P5A080E21**20	
CAP**6024AL*	1.00	1.05	1.01	1.11	1.11	59*P5A120E24**22	
CNPH*6024AL*	1.00	1.05	1.01	1.11	1.11	59*P5A120E24**22	
CNPH*6124AL*	1.00	1.05	1.01	1.10	1.10	59*P5A120E24**22	
CNPV*6024AL*	0.99	1.04	1.01	1.11	1.11	59*P5A120E24**22	
CNPV*6124AL*	1.00	1.05	1.01	1.09	1.09	59*P5A120E24**22	
CSPH*6012AL*	1.00	1.05	1.00	1.09	1.09	59*P5A120E24**22	
CSPH*6012AL*	1.00	1.05	1.01	1.10	1.10	59*P6A080E21**20	
CAP**6021AL*	0.99	1.04	1.01	1.11	1.11	59*P6A100E21**20	
CNPH*6124AL*	1.00	1.05	1.01	1.10	1.10	59*P6A120E24**22	
CNPV*6024AL*	0.98	1.03	1.01	1.10	1.10	59*P6A120E24**22	
CNPV*6124AL*	1.00	1.05	1.01	1.09	1.09	59*P6A120E24**22	
CSPH*6012AL*	1.00	1.05	1.00	1.08	1.08	59*P6A120E24**22	
CAP**6024AL*	1.00	1.05	1.01	1.09	1.09	OVLAAB060154	
CNPV*6024AL*	0.99	1.04	1.01	1.09	1.09	OVLAAB060154	
CNPV*6124AL*	1.01	1.06	1.01	1.07	1.07	OVLAAB060154	
CNPH*6124AL*	1.01	1.06	1.01	1.11	1.11	OVMAAB060154	
CSPH*6012AL*	1.01	1.06	1.00	1.11	1.11	OVMAAB060154	

See notes on page 48

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

EDB ° F (° C)	EVAR AIR EWB ° F (° C)	24VNA913 / FE4ANF002L Comfort + Dehumidify Mode Condenser Entering Air Temperature ° F (° C)																																																																							
		105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)																																																							
		ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW																																																				
			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†		Total	Sens†																																																		
STAGE 5																																																																									
75 (23.9)	72 (22.2)	360	13.14	5.38	1.16	420	14.21	5.86	0.98	420	15.07	6.18	0.81	420	15.92	6.51	0.65	420	16.76	6.83	0.50																																																				
																						67 (19.4)	11.86	7.01	0.98	13.61	8.13	0.82	14.37	8.46	0.67	15.11	8.79	0.53																																							
																																			63 (17.2)	10.91	8.29	0.99	12.53	9.64	0.83	13.22	9.98	0.69	13.89	10.32	0.56																										
																																																57 (13.9)	9.88	9.88	1.16	10.89	1.16	11.42	11.42	0.84	11.93	11.93	0.71	12.42	12.42	0.59											
																																																															72 (22.2)	13.10	7.04	0.98	15.02	8.15	0.81	15.87	8.49	0.65	16.71
80 (26.7)	67 (19.4)	360	11.82	8.65	1.16	420	12.80	9.71	0.98	420	13.57	10.07	0.82	420	14.33	10.42	0.67	420	15.07	10.76	0.53																																																				
																						63 (17.2)	10.90	9.92	0.99	11.84	11.20	0.99	12.54	11.57	0.83	13.22	11.93	0.69	13.88	12.28	0.56																																				
																																						57 (13.9)	10.51	10.51	1.16	11.59	11.59	0.99	12.16	12.16	0.83	12.70	12.70	0.70	13.22	13.22	0.57																				
																																																						STAGE 3																			
																																																						72 (22.2)	10.85	4.45	0.90	360	11.86	4.92	0.77	360	12.61	5.20	0.65	360	13.33	5.47	0.54	360	14.04	5.74	0.43
75 (23.9)	67 (19.4)	300	9.75	5.82	0.91	360	10.67	6.59	0.78	360	11.33	6.88	0.68	360	11.97	7.17	0.57	360	12.60	7.45	0.47																																																				
																						63 (17.2)	8.96	6.90	0.91	9.81	7.90	0.79	10.40	8.20	0.69	10.98	8.49	0.60	11.55	8.78	0.50																																				
																																						57 (13.9)	8.17	8.17	0.92	9.13	9.13	0.79	9.58	9.58	0.71	10.02	10.02	0.62	10.45	10.45	0.53																				
																																																						72 (22.2)	10.82	5.86	0.90	360	11.82	6.62	0.77	360	12.56	6.92	0.65	360	13.29	7.21	0.54	360	14.00	7.50	0.43
																																																						67 (19.4)	9.73	7.22	0.91	360	10.64	8.28	0.78	360	11.30	8.59	0.68	360	11.94	8.89	0.57	360	12.57	9.19	0.47
80 (26.7)	63 (17.2)	300	8.97	8.29	0.91	360	9.84	9.57	0.79	360	10.42	9.89	0.69	360	10.99	10.21	0.60	360	11.56	10.52	0.50																																																				
																						57 (13.9)	8.70	8.70	0.91	9.73	9.73	0.79	10.22	10.22	0.69	10.68	10.68	0.60	11.14	11.14	0.51																																				
																																						STAGE 1																																			
																																						72 (22.2)	9.87	4.09	0.77	300	8.43	3.60	0.51	300	9.04	3.82	0.45	300	9.66	4.05	0.37	300	10.27	4.28	0.28																
																																						67 (19.4)	8.87	5.49	0.78	300	7.60	5.04	0.52	300	8.15	5.28	0.46	300	8.69	5.52	0.39	300	9.22	5.76	0.32																
75 (23.9)	63 (17.2)	300	8.15	6.59	0.78	360	7.00	6.18	0.52	360	7.50	6.43	0.47	360	7.98	6.68	0.41	360	8.45	6.93	0.34																																																				
																						57 (13.9)	7.59	7.59	0.78	6.74	6.74	0.52	7.15	7.15	0.47	7.53	7.53	0.42	7.89	7.89	0.36																																				
																																						72 (22.2)	9.83	5.52	0.77	300	8.39	5.05	0.51	300	9.00	5.30	0.45	300	9.62	5.55	0.37	300	10.23	5.80	0.28																
																																						67 (19.4)	8.84	6.90	0.78	300	7.58	6.49	0.52	300	8.13	6.75	0.46	300	8.67	7.01	0.39	300	9.19	7.27	0.32																
																																						63 (17.2)	8.17	7.99	0.78	300	7.22	7.22	0.52	300	7.65	7.65	0.47	300	8.07	8.07	0.41	300	8.49	8.42	0.34																
80 (26.7)	57 (13.9)	300	8.09	8.09	0.78	360	7.21	7.21	0.52	360	7.64	7.64	0.47	360	8.05	8.05	0.41	360	8.45	8.45	0.34																																																				

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 48

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

24VNA913

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*FE4ANF002L	1.00	1.00	
CAP**1814AL*	0.98	0.98	58CV(A.X)070-12
CAP**2414AL*	0.99	0.99	58CV(A.X)070-12
CAP**2417AL*	0.99	0.99	59*N*A060V17**14
CAP**2417AL*	0.99	0.99	59*N*A080V17**14
CNPH*2417AL*	0.99	0.99	59*N*A060V17**14
CNPH*2417AL*	0.99	0.99	59*N*A080V17**14
CNPV*2414AL*	1.00	1.00	58CV(A.X)070-12
CNPV*2417AL*	0.99	0.99	59*N*A060V17**14
CNPV*2417AL*	0.99	0.99	59*N*A080V17**14
CSPH*2412AL*	1.00	1.00	59*N*A060V17**14
CSPH*2412AL*	1.00	1.00	59*N*A080V17**14

See additional notes on page 48

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

EDB ° F (° C)	EVAP. AIR EWB ° F (° C)	24VNA32A / FEANF005 Comfort + Dehumidify Mode Condenser Entering Air Temperature ° F (° C)										75 (23.9)										85 (18.3)									
		105 (40.5)					85 (35)					STAGE 5					STAGE 3					STAGE 1 - FEANF005 ONLY					STAGE 1 - ALL OTHER INDOOR COMBINATIONS				
		ID SCFM		Capacity MBtuh		Total Sys. KW	ID SCFM		Capacity MBtuh		Total Sys. KW	ID SCFM		Capacity MBtuh		Total Sys. KW	ID SCFM		Capacity MBtuh		Total Sys. KW	ID SCFM		Capacity MBtuh		Total Sys. KW	ID SCFM		Capacity MBtuh		Total Sys. KW
		Total	Sens†	Total	Sens†	Total	Total	Sens†	Total	Sens†	Total	Total	Sens†	Total	Sens†	Total	Total	Sens†	Total	Sens†	Total	Total	Sens†	Total	Sens†	Total	Total	Sens†	Total	Sens†	Total
75 (23.9)	72 (22.2)	18.41	7.66	1.92		2.05		9.83	24.19	10.41	1.59		25.62	10.41	1.59				27.05	11.00	1.19			28.58	11.63	0.84			28.58	11.63	0.84
	67 (19.4)	16.71	10.40	1.94		2.06		12.63	22.02	13.37	1.62		23.35	13.37	1.62				24.68	14.13	1.23			26.09	15.02	0.89			26.09	15.02	0.89
	63 (17.2)	15.50	12.56	1.95		2.07		14.80	20.40	15.67	1.63	634	21.64	15.67	1.63				22.89	16.56	1.25	663		24.23	17.65	0.92			24.23	17.65	0.92
	57 (13.9)	14.52	14.52	1.95		2.07		18.00	18.30	19.04	1.65		19.43	19.04	1.65				20.56	20.13	1.28			21.81	21.49	0.95			21.81	21.49	0.95
	72 (22.2)	18.29	10.37	1.91		2.04		12.57	24.08	13.30	1.59		25.50	13.30	1.59				26.92	14.05	1.19			28.43	14.92	0.84			28.43	14.92	0.84
80 (26.7)	67 (19.4)	16.65	13.09	1.94		2.06		15.35	21.95	16.24	1.62	634	23.28	16.24	1.62				24.60	17.16	1.23	663		26.00	18.28	0.89			26.00	18.28	0.89
	63 (17.2)	15.55	15.22	1.95		2.07		17.52	20.38	18.53	1.63		21.62	18.53	1.63				22.87	19.59	1.25			24.20	20.91	0.92			24.20	20.91	0.92
	57 (13.9)	15.42	15.42	1.95		2.07		19.24	19.24	20.39	1.64		20.39	20.39	1.64				21.57	21.57	1.27			22.92	22.92	0.94			22.92	22.92	0.94
	72 (22.2)	15.17	6.19	1.32		1.09		6.46	15.89	6.84	0.91		16.82	6.84	0.91				17.81	7.24	0.73			18.87	7.88	0.54			18.87	7.88	0.54
	67 (19.4)	13.78	8.02	1.34		1.11		8.33	14.47	8.80	0.93	437	15.33	8.80	0.93				16.24	9.32	0.76	475		17.22	9.94	0.59			17.22	9.94	0.59
75 (23.9)	63 (17.2)	12.75	9.46	1.34		1.12		9.80	13.41	10.33	0.95		14.22	10.33	0.95				15.07	10.96	0.79			16.00	11.72	0.62			16.00	11.72	0.62
	57 (13.9)	11.46	11.46	1.35		1.12		11.94	12.02	12.57	0.97		12.74	12.57	0.97				13.52	13.34	0.82			14.39	14.31	0.66			14.39	14.31	0.66
	72 (22.2)	15.10	8.00	1.32		1.09		8.29	15.81	8.75	0.91		16.74	8.75	0.91				17.72	9.27	0.72			18.78	9.88	0.54			18.78	9.88	0.54
	67 (19.4)	13.74	9.82	1.34		1.11		10.15	14.42	10.70	0.93		15.28	10.70	0.93				16.19	11.34	0.76			17.16	12.14	0.59			17.16	12.14	0.59
	63 (17.2)	12.73	11.26	1.34		1.12		11.61	13.39	12.23	0.95	437	14.20	12.23	0.95				15.05	12.97	0.79	475		15.98	13.90	0.62			15.98	13.90	0.62
80 (26.7)	57 (13.9)	12.15	12.15	1.34		1.12		12.69	12.69	13.42	0.96		13.42	13.42	0.96				14.24	14.24	0.80			15.18	15.18	0.64			15.18	15.18	0.64
	72 (22.2)	11.66	4.74	0.81		0.47		3.75	9.26	3.95	0.47		9.75	3.95	0.47				10.23	4.15	0.43			10.72	4.35	0.36			10.72	4.35	0.36
	67 (19.4)	10.56	6.08	0.83		0.48		4.68	8.39	4.89	0.49	250	8.84	4.89	0.49				9.27	5.09	0.47	250		9.70	5.30	0.40			9.70	5.30	0.40
	63 (17.2)	9.75	7.13	0.83		0.49		5.40	7.74	5.61	0.51		8.15	5.61	0.51				8.56	5.83	0.49			8.96	6.04	0.44			8.96	6.04	0.44
	57 (13.9)	8.68	8.68	0.84		0.49		6.46	6.85	6.68	0.52		7.22	6.68	0.52				7.59	6.90	0.52			7.95	7.12	0.48			7.95	7.12	0.48
80 (26.7)	72 (22.2)	11.61	6.08	0.81		0.47		4.68	9.23	4.88	0.47		9.72	4.88	0.47				10.20	5.09	0.43			10.68	5.30	0.36			10.68	5.30	0.36
	67 (19.4)	10.53	7.41	0.83		0.48		5.60	8.37	5.82	0.49	250	8.81	5.82	0.49				9.25	6.03	0.47	250		9.68	6.24	0.40			9.68	6.24	0.40
	63 (17.2)	9.73	8.46	0.83		0.49		6.32	7.72	6.54	0.51		8.14	6.54	0.51				8.54	6.76	0.49			8.95	6.98	0.44			8.95	6.98	0.44
	57 (13.9)	9.21	9.21	0.83		0.49		7.09	7.09	7.40	0.52		7.40	7.40	0.52				7.70	7.70	0.51			8.00	8.00	0.48			8.00	8.00	0.48
	72 (22.2)	11.66	4.74	0.81		0.47		3.64	8.99	3.89	0.48		9.59	3.89	0.48				9.99	4.06	0.44			10.66	4.33	0.36			10.66	4.33	0.36
75 (23.9)	67 (19.4)	10.56	6.08	0.83		0.48		4.46	8.13	4.76	0.50	222	8.68	4.76	0.50				9.04	4.92	0.48	229		9.65	5.25	0.41			9.65	5.25	0.41
	63 (17.2)	9.75	7.13	0.83		0.49		5.09	7.49	5.44	0.51		8.00	5.44	0.51				8.34	5.58	0.50			8.91	5.98	0.44			8.91	5.98	0.44
	57 (13.9)	8.68	8.68	0.84		0.49		6.02	6.63	6.43	0.52		7.09	6.43	0.52				7.39	6.56	0.52			7.90	7.04	0.48			7.90	7.04	0.48
	72 (22.2)	11.61	6.08	0.81		0.47		4.47	8.96	4.76	0.47		9.55	4.76	0.47				9.96	4.92	0.44			10.62	5.26	0.36			10.62	5.26	0.36
	67 (19.4)	10.53	7.41	0.83		0.48		5.28	8.11	5.63	0.50	222	8.66	5.63	0.50				9.02	5.78	0.48	229		9.63	6.18	0.41			9.63	6.18	0.41
80 (26.7)	63 (17.2)	9.73	8.46	0.83		0.49		5.91	7.48	6.31	0.51		7.99	6.31	0.51				8.33	6.44	0.50			8.89	6.91	0.44			8.89	6.91	0.44
	57 (13.9)	9.21	9.21	0.83		0.49		6.73	6.73	7.19	0.52		7.19	7.19	0.52				7.40	7.40	0.52			7.93	7.93	0.48			7.93	7.93	0.48

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 — Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 48

24VNA924A

COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL
*FE4AN(B.F)005L		1.00	1.00	
FE4AN(B.F)003L		0.96	1.00	
FE4AN(B)006L		0.98	1.08	
FE4AN(F)002L		0.96	1.00	
CAP**3617AL*		0.98	1.03	56CV(A.X)070-12
CNPV*3617AL*		0.98	1.08	56CV(A.X)070-12
CNPV*3717AL*		0.97	1.01	56CV(A.X)070-12
CNPV*4217AL*		0.96	1.02	56CV(A.X)070-12
CSPH*3612AL*		1.00	1.05	56CV(A.X)070-12
CSPH*4212AL*		1.00	1.05	56CV(A.X)070-12
CAP**3617AL*		0.98	1.03	56CV(A.X)080-16
CAP**3621AL*		0.98	1.03	56CV(A.X)080-16
CAP**4221AL*		0.99	1.04	56CV(A.X)080-16
CNPV*3617AL*		0.97	1.01	56CV(A.X)080-16
CNPV*3621AL*		0.97	1.01	56CV(A.X)080-16
CNPV*3717AL*		0.97	0.97	56CV(A.X)080-16
CNPV*4217AL*		0.96	1.00	56CV(A.X)080-16
CNPV*4221AL*		0.96	1.00	56CV(A.X)080-16
CSPH*3612AL*		1.00	1.00	56CV(A.X)080-16
CSPH*4212AL*		1.01	1.01	56CV(A.X)080-16
CAP**3617AL*		0.98	1.03	59"N*A060V17***14
CAP**3621AL*		0.98	1.03	59"N*A060V17***14
CAP**4221AL*		0.98	1.03	59"N*A060V17***14
CNPV*3617AL*		0.97	1.07	59"N*A060V17***14
CNPV*4221AL*		0.98	1.06	59"N*A060V17***14
CNPV*3617AL*		0.94	1.03	59"N*A060V17***14
CNPV*3621AL*		0.94	1.03	59"N*A060V17***14
CNPV*3717AL*		0.97	1.02	59"N*A060V17***14
CNPV*4221AL*		0.95	1.04	59"N*A060V17***14
CSPH*3612AL*		0.99	1.04	59"N*A060V17***14
CSPH*4212AL*		1.00	1.05	59"N*A060V17***14
CAP**3617AL*		0.98	1.03	59"N*A080V17***14
CAP**3621AL*		0.98	1.03	59"N*A080V17***14
CAP**4221AL*		0.99	1.04	59"N*A080V17***14
CNPV*3617AL*		0.98	1.06	59"N*A080V17***14
CNPV*4221AL*		0.99	1.09	59"N*A080V17***14
CNPV*3617AL*		0.95	1.04	59"N*A080V17***14
CNPV*3621AL*		0.95	0.99	59"N*A080V17***14
CNPV*3717AL*		0.97	1.02	59"N*A080V17***14
CNPV*4221AL*		0.97	1.02	59"N*A080V17***14
CSPH*3612AL*		1.00	1.05	59"N*A080V17***14
CSPH*4212AL*		1.00	1.05	59"N*A080V17***14
CAP**3621AL*		0.98	1.03	59MNT*A060V21**20
CAP**4221AL*		0.99	1.04	59MNT*A060V21**20
CNPV*3617AL*		0.98	1.04	59MNT*A060V21**20

2-STAGE (Hi-Stage 5, Lo-Stage 2)					
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model
FV4CN(B,F)003L	0.94	0.94	0.99	0.94	
FV4CNF002L	0.94	0.94	1.00	0.97	
CAP**2414AL*	0.94	0.99	1.08	1.12	58PH*045-08
CAP**2417AL*	0.94	0.99	1.09	1.12	58PH*045-08
CAP**3014AL*	0.95	0.95	1.08	1.11	58PH*045-08
CAP**3017AL*	0.95	0.95	1.09	1.11	58PH*045-08
CNPV*2414AL*	0.93	0.98	1.08	1.12	58PH*045-08
CNPV*2417AL*	0.93	0.98	1.08	1.12	58PH*045-08
CNPV*3014AL*	0.95	1.00	1.08	1.11	58PH*045-08
CNPV*3017AL*	0.95	1.00	1.09	1.11	58PH*045-08
CNPV*3117AL*	0.95	0.95	1.12	1.11	58PH*045-08
CAP**2414AL*	0.93	0.93	1.08	1.08	58CTW045-12
CAP**2417AL*	0.94	0.94	1.08	1.07	58CTW045-12
CAP**3014AL*	0.93	0.93	1.10	1.09	58CTW045-12
CAP**3017AL*	0.93	0.93	1.11	1.09	58CTW045-12
CNPV*3117AL*	0.94	0.94	1.12	1.08	58CTW045-12
CSPH*3012AL*	0.93	0.93	1.11	1.08	58CTW045-12
CAP**2417AL*	0.93	0.93	1.11	1.09	58CTW070-16
CNPV*3017AL*	0.93	0.93	1.11	1.08	58CTW070-16
CNPV*3117AL*	0.95	1.05	1.09	1.07	58CTW070-16
CNPV*3017AL*	0.93	0.98	1.11	1.08	58CTW070-16
CNPV*3117AL*	0.95	0.95	1.12	1.05	58CTW070-16
CNPV*2417AL*	0.93	0.98	1.08	1.07	58CTW070-16
CNPV*3017AL*	0.93	0.98	1.11	1.08	58CTW070-16
CNPV*3117AL*	0.94	0.94	1.13	1.15	58CTW090-16
CSPH*2412AL*	0.94	0.94	1.13	1.15	58CTW090-16
CSPH*3012AL*	0.95	0.95	1.14	1.12	58CTW090-16
CAP**2414AL*	0.95	1.00	1.08	1.13	59*P2A040E14**10
CAP**2417AL*	0.93	0.98	1.08	1.13	59*P2A040E14**10
CAP**3014AL*	0.94	0.99	1.07	1.12	59*P2A040E14**10
CAP**3017AL*	0.95	1.00	1.08	1.12	59*P2A040E14**10
CNPV*2414AL*	0.93	0.97	1.07	1.13	59*P2A040E14**10
CNPV*2417AL*	0.93	0.97	1.07	1.13	59*P2A040E14**10
CNPV*3014AL*	0.94	0.99	1.07	1.12	59*P2A040E14**10
CNPV*3017AL*	0.95	1.00	1.08	1.12	59*P2A040E14**10
CNPV*3117AL*	0.94	0.94	1.11	1.11	59*P2A040E14**10
CSPH*2412AL*	0.96	1.00	1.10	1.23	59*P2A040E17**12
CSPH*3012AL*	0.97	1.01	1.09	1.10	59*P2A040E17**12
CAP**2417AL*	0.93	0.98	1.07	1.12	59*P2A040E17**12
CAP**3017AL*	0.95	1.00	1.08	1.13	59*P2A040E17**12
CNPV*3017AL*	0.95	1.05	1.08	1.13	59*P2A040E17**12
CNPV*3017AL*	0.95	1.05	1.08	1.12	59*P2A040E17**12
CNPV*3117AL*	0.97	1.01	1.09	1.10	59*P2A040E17**12
CNPV*2417AL*	0.93	0.97	1.07	1.13	59*P2A040E17**12
CNPV*3017AL*	0.95	1.00	1.08	1.12	59*P2A040E17**12
CNPV*3117AL*	0.97	1.01	1.09	1.10	59*P2A040E17**12
CSPH*2412AL*	0.96	1.00	1.10	1.25	59*P2A040E17**12
CAP**2414AL*	0.94	0.94	1.09	1.10	59*P2A060E14**12
CAP**2417AL*	0.95	0.95	1.10	1.10	59*P2A060E14**12
CAP**3014AL*	0.95	0.93	1.11	1.11	59*P2A060E14**12

2-STAGE (HI-Stage 5, Lo-Stage 2)					
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model
CAP**3017AL*	0.94	0.94	1.12	1.11	59*P2A060E4**12
CNPV*2414AL*	0.94	0.99	1.09	1.09	59*P2A060E4**12
CNPV*2417AL*	0.94	0.99	1.09	1.09	59*P2A060E4**12
CNPV*3014AL*	0.93	0.98	1.11	1.11	59*P2A060E4**12
CNPV*3017AL*	0.94	0.94	1.12	1.11	59*P2A060E4**12
CNPV*3117AL*	0.96	0.96	1.13	1.09	59*P2A060E4**12
CSFH*2412AL*	0.95	0.95	1.09	1.10	59*P2A060E4**12
CSFH*3012AL*	0.94	0.94	1.12	1.10	59*P2A060E4**12
CNPV*2417AL*	0.96	1.00	1.11	1.13	59*P2A060E7**14
CSFH*2412AL*	0.95	0.95	1.13	1.15	59*P2A060E7**14
CNPV*2417AL*	0.96	1.00	1.10	1.10	59*P2A080E7**16
CSFH*2412AL*	0.94	0.94	1.12	1.12	59*P2A080E7**16
CAP**2414AL*	0.93	1.03	1.07	1.17	59*P5A040E4**10
CAP**2417AL*	0.94	1.04	1.07	1.17	59*P5A040E4**10
CAP**3014AL*	0.95	1.05	1.07	1.16	59*P5A040E4**10
CAP**3017AL*	0.95	1.05	1.07	1.15	59*P5A040E4**10
CNPV*2414AL*	0.93	1.03	1.07	1.17	59*P5A040E4**10
CNPV*2417AL*	0.93	1.03	1.07	1.17	59*P5A040E4**10
CNPV*3014AL*	0.95	1.05	1.07	1.16	59*P5A040E4**10
CNPV*3017AL*	0.95	1.05	1.07	1.15	59*P5A040E4**10
CNPV*3117AL*	0.96	1.05	1.08	1.13	59*P5A040E4**10
CSFH*2412AL*	0.95	1.05	1.07	1.17	59*P5A040E4**10
CSFH*3012AL*	0.95	1.05	1.07	1.15	59*P5A040E4**10
CAP**2417AL*	0.93	0.97	1.07	1.14	59*P5A040E7**12
CAP**3017AL*	0.93	0.98	1.07	1.13	59*P5A040E7**12
CNPV*2417AL*	0.94	1.04	1.08	1.15	59*P5A040E7**12
CNPV*3017AL*	0.93	1.03	1.07	1.13	59*P5A040E7**12
CNPV*3117AL*	0.96	1.00	1.09	1.12	59*P5A040E7**12
CNPV*2417AL*	0.92	1.01	1.07	1.14	59*P5A040E7**12
CNPV*3017AL*	0.93	0.98	1.07	1.13	59*P5A040E7**12
CNPV*3117AL*	0.94	0.99	1.10	1.12	59*P5A040E7**12
CSFH*2412AL*	0.96	1.05	1.10	1.23	59*P5A040E7**12
CSFH*3012AL*	0.93	0.98	1.08	1.13	59*P5A040E7**12
CNPV*2417AL*	0.96	1.01	1.10	1.17	59*P5A060E7**14
CSFH*2412AL*	0.97	1.01	1.10	1.16	59*P5A060E7**14

See notes on page 48

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB ° F (° C)	EVA/P AIR EWB ° F (° C)	24VNA924B / FE4ANF002L Comfort + Dehumidify Mode Condenser Entering Air Temperature ° F (° C)																				
		105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)				
		Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW		
		Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†		Total	Sens†
STAGE 5																						
75 (23.9)	72 (22.2)	24.23	9.92	2.44	642	608	25.33	10.31	2.12	634	26.93	10.95	1.84	663	28.54	11.60	1.58	708	30.28	12.32	1.33	
	67 (19.4)	22.01	12.96	2.42				23.01	13.22			2.10	24.45			14.00	1.83			25.91	14.82	1.58
	63 (17.2)	20.38	15.34	2.39				21.31	15.50			2.08	22.64			16.40	1.82			24.00	17.33	1.57
	57 (13.9)	18.45	18.45	2.36				19.08	18.80			2.05	20.28			19.87	1.80			21.49	20.99	1.57
	72 (22.2)	24.17	12.95	2.44				642	608			25.27	13.22			2.12	634			26.87	14.00	1.84
67 (19.4)	21.96	15.96	2.42	22.96	16.09	2.10	24.40			17.02	1.83		25.86	17.99	1.58							
63 (17.2)	20.36	18.31	2.39	21.28	18.35	2.08	22.61			19.39	1.82		23.97	20.49	1.57							
57 (13.9)	19.56	19.56	2.38	20.08	20.08	2.07	21.29			21.29	1.81		22.54	22.54	1.57							
STAGE 3																						
75 (23.9)	72 (22.2)	16.80	6.88	1.49	437	415	17.53	7.13	1.28	437	18.69	7.80	1.10	456	19.82	8.06	0.92	484	21.04	8.55	0.76	
	67 (19.4)	15.18	8.96	1.50				15.85	9.13			1.28	16.89			9.72	1.11			17.91	10.28	0.95
	63 (17.2)	13.98	10.59	1.50				14.60	10.69			1.28	15.56			11.37	1.13			16.49	12.01	0.97
	57 (13.9)	12.63	12.63	1.49				12.99	12.94			1.29	13.83			13.75	1.14			14.64	14.51	1.00
	72 (22.2)	16.75	8.99	1.49				437	415			17.48	9.16			1.28	437			18.64	9.75	1.10
67 (19.4)	15.14	11.05	1.50	15.81	11.13	1.28	16.85			11.84	1.11		17.87	12.51	0.95							
63 (17.2)	13.97	12.66	1.50	14.59	12.68	1.28	15.54			13.48	1.13		16.47	14.23	0.97							
57 (13.9)	13.43	13.43	1.50	13.78	13.78	1.29	14.66			14.66	1.13		15.51	15.51	0.99							
STAGE 1																						
75 (23.9)	72 (22.2)	13.91	5.70	1.21	362	222	8.34	3.43	0.52	234	8.89	3.65	0.44	229	9.31	3.80	0.37	245	9.90	4.05	0.29	
	67 (19.4)	12.50	7.42	1.22				7.48	4.49			0.53	7.97			4.78	0.46			8.34	4.91	0.40
	63 (17.2)	11.48	8.77	1.22				6.85	5.34			0.53	7.30			5.67	0.47			7.63	5.79	0.41
	57 (13.9)	10.41	10.41	1.22				6.25	6.25			0.54	6.65			6.65	0.48			6.87	6.87	0.43
	72 (22.2)	13.87	7.46	1.21				362	222			8.31	4.53			0.52	234			8.86	4.82	0.44
67 (19.4)	12.47	9.17	1.22	7.45	5.59	0.53	7.94			5.94	0.46		8.31	6.06	0.40							
63 (17.2)	11.48	10.51	1.22	6.85	6.43	0.53	7.30			6.83	0.47		7.62	6.93	0.41							
57 (13.9)	11.08	11.08	1.22	6.68	6.68	0.54	7.10			7.10	0.48		7.33	7.33	0.42							
72 (22.2)	13.91	5.70	1.21	362	222	8.34	3.43			0.52	234		8.89	3.65	0.44	229		9.31	3.80		0.37	245
67 (19.4)	12.50	7.42	1.22				7.48	4.49	0.53	7.97		4.78		0.46	8.34		4.91		0.40			
63 (17.2)	11.48	8.77	1.22				6.85	5.34	0.53	7.30		5.67		0.47	7.63		5.79		0.41			
57 (13.9)	10.41	10.41	1.22				6.25	6.25	0.54	6.65		6.65		0.48	6.87		6.87		0.43			
72 (22.2)	13.87	7.46	1.21				362	222	8.31	4.53		0.52		234	8.86		4.82		0.44	229	9.28	
67 (19.4)	12.47	9.17	1.22	7.45	5.59	0.53				7.94	5.94	0.46	8.31			6.06	0.40					
63 (17.2)	11.48	10.51	1.22	6.85	6.43	0.53				7.30	6.83	0.47	7.62			6.93	0.41					
57 (13.9)	11.08	11.08	1.22	6.68	6.68	0.54				7.10	7.10	0.48	7.33			7.33	0.42					
72 (22.2)	13.91	5.70	1.21	362	222	8.34				3.43	0.52	234	8.89			3.65	0.44	229	9.31			3.80
67 (19.4)	12.50	7.42	1.22				7.48	4.49	0.53	7.97	4.78			0.46	8.34	4.91	0.40					
63 (17.2)	11.48	8.77	1.22				6.85	5.34	0.53	7.30	5.67			0.47	7.63	5.79	0.41					
57 (13.9)	10.41	10.41	1.22				6.25	6.25	0.54	6.65	6.65			0.48	6.87	6.87	0.43					
72 (22.2)	13.87	7.46	1.21				362	222	8.31	4.53	0.52			234	8.86	4.82	0.44			229	9.28	4.96
67 (19.4)	12.47	9.17	1.22	7.45	5.59	0.53				7.94	5.94	0.46	8.31			6.06	0.40					
63 (17.2)	11.48	10.51	1.22	6.85	6.43	0.53				7.30	6.83	0.47	7.62			6.93	0.41					
57 (13.9)	11.08	11.08	1.22	6.68	6.68	0.54				7.10	7.10	0.48	7.33			7.33	0.42					
72 (22.2)	13.91	5.70	1.21	362	222	8.34				3.43	0.52	234	8.89			3.65	0.44	229	9.31			3.80
67 (19.4)	12.50	7.42	1.22				7.48	4.49	0.53	7.97	4.78			0.46	8.34	4.91	0.40					
63 (17.2)	11.48	8.77	1.22				6.85	5.34	0.53	7.30	5.67			0.47	7.63	5.79	0.41					
57 (13.9)	10.41	10.41	1.22				6.25	6.25	0.54	6.65	6.65			0.48	6.87	6.87	0.43					
72 (22.2)	13.87	7.46	1.21				362	222	8.31	4.53	0.52			234	8.86	4.82	0.44			229	9.28	4.96
67 (19.4)	12.47	9.17	1.22	7.45	5.59	0.53				7.94	5.94	0.46	8.31			6.06	0.40					
63 (17.2)	11.48	10.51	1.22	6.85	6.43	0.53				7.30	6.83	0.47	7.62			6.93	0.41					
57 (13.9)	11.08	11.08	1.22	6.68	6.68	0.54				7.10	7.10	0.48	7.33			7.33	0.42					
72 (22.2)	13.91	5.70	1.21	362	222	8.34				3.43	0.52	234	8.89			3.65	0.44	229	9.31			3.80
67 (19.4)	12.50	7.42	1.22				7.48	4.49	0.53	7.97	4.78			0.46	8.34	4.91	0.40					
63 (17.2)	11.48	8.77	1.22				6.85	5.34	0.53	7.30	5.67			0.47	7.63	5.79	0.41					
57 (13.9)	10.41	10.41	1.22				6.25	6.25	0.54	6.65	6.65			0.48	6.87	6.87	0.43					
72 (22.2)	13.87	7.46	1.21				362	222	8.31	4.53	0.52			234	8.86	4.82	0.44			229	9.28	4.96
67 (19.4)	12.47	9.17	1.22	7.45	5.59	0.53				7.94	5.94	0.46	8.31			6.06	0.40					
63 (17.2)	11.48	10.51	1.22	6.85	6.43	0.53				7.30	6.83	0.47	7.62			6.93	0.41					
57 (13.9)	11.08	11.08	1.22	6.68	6.68	0.54				7.10	7.10	0.48	7.33			7.33	0.42					
72 (22.2)	13.91	5.70	1.21	362	222	8.34				3.43	0.52	234	8.89			3.65	0.44	229	9.31			3.80
67 (19.4)	12.50	7.42	1.22				7.48	4.49	0.53	7.97	4.78			0.46	8.34	4.91	0.40					
63 (17.2)	11.48	8.77	1.22				6.85	5.34	0.53	7.30	5.67			0.47	7.63	5.79	0.41					
57 (13.9)	10.41	10.41	1.22				6.25	6.25	0.54	6.65	6.65			0.48	6.87	6.87	0.43					
72 (22.2)	13.87	7.46	1.21				362	222	8.31	4.53	0.52			234	8.86	4.82	0.44			229	9.28	4.96
67 (19.4)	12.47	9.17	1.22	7.45	5.59	0.53				7.94	5.94	0.46	8.31			6.06	0.40					
63 (17.2)	11.48	10.51	1.22	6.85	6.43	0.53				7.30	6.83	0.47	7.62			6.93	0.41					
57 (13.9)	11.08	11.08	1.22	6.68	6.68	0.54				7.10	7.10	0.48	7.33			7.33	0.42					
72 (22.2)	13.91	5.70	1.21	362	222	8.34				3.43	0.52	234	8.89			3.65	0.44	229	9.31			3.80
67 (19.4)	12.50	7.42	1.22				7.48	4.49	0.53	7.97	4.78			0.46	8.34	4.91	0.40					
63 (17.2)	11.48	8.77	1.22				6.85	5.34	0.53	7.30	5.67			0.47	7.63	5.79	0.41					
57 (13.9)	10.41	10.41	1.22				6.25	6.25	0.54	6.65	6.65			0.48	6.87	6.87	0.43					
72 (22.2)	13.87	7.46	1.21				362	222	8.31	4.53	0.52			234	8.86	4.82	0.44			229	9.28	4.96
67 (19.4)	12.47	9.17	1.22	7.45	5.59	0.53				7.94	5.94	0.46	8.31			6.06	0.40					
63 (17.2)	11.48	10.51	1.22	6.85	6.43	0.53				7.30	6.83	0.47	7.62			6.93	0.41					
57 (13.9)	11.08	11.08	1.22	6.68	6.68	0.54				7.10	7.10	0.48	7.33			7.33	0.42					
72 (22.2)	13.91	5.70	1.21	362	222	8.34				3.43	0.52	234	8.89			3.65	0.44	229	9.31			3.80
67 (19.4)	12.50	7.42	1.22				7.48	4.49	0.53	7.97	4.78			0.46	8.34	4.91	0.40					
63 (17.2)	11.48	8.77	1.22				6.85	5.34	0.53	7.30	5.67			0.47	7.63	5.79	0.41					
57 (13.9)	10.41	10.41	1.22				6.25	6.25	0.54	6.65	6.65			0.48	6.87	6.87	0.43					
72 (22.2)	13.87	7.46	1.21				362	222	8.31	4.53	0.52			234	8.86	4.82	0.44			229	9.28	4.96
67 (19.4)	12.47	9.17	1.22	7.45	5.59																	

24VNA924B

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CSPH*4212AL*	1.00	1.00	58CV(A,X)070-12
CSPH*4212AL*	1.00	1.00	58CV(A,X)090-16
CSPH*4812AL*	1.00	1.00	59*N*AO60V17**14
CSPH*4812AL*	1.00	1.00	59*N*AO80V17**14

2-STAGE (Hi-Stage 5, Lo-Stage 2)							Furnace Model
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power			
*FV4CNF002L	1.00	1.00	1.00	1.00			
FV4CNU(B)F003L	1.04	0.95	0.99	0.98			
FV4CNF002L	1.03	0.94	1.00	1.00	59*P2A040E14**10		
CAP**24144L*	1.03	0.99	1.08	1.16	59*P2A060E14**12		
CAP**24144L*	1.03	0.93	1.09	1.13	59*P2A060E14**12		
CAP**24144L*	1.02	1.02	1.07	1.19	59*P5A040E14**10		
CAP**24144L*	1.02	0.97	1.08	1.15	59PH*045-08		
CAP**24144L*	1.02	0.92	1.08	1.11	58CTW045-12		
CAP**24174L*	1.02	0.97	1.08	1.16	59*P2A040E14**10		
CAP**24174L*	1.02	0.97	1.07	1.15	59*P2A040E17**12		
CAP**24174L*	1.03	0.94	1.10	1.14	59*P2A060E14**12		
CAP**24174L*	1.02	1.02	1.07	1.19	59*P5A040E14**10		
CAP**24174L*	1.01	0.96	1.07	1.17	59*P5A040E17**12		
CAP**24174L*	1.03	0.98	1.09	1.16	59PH*045-08		
CAP**24174L*	1.03	0.93	1.08	1.10	58CTW045-12		
CAP**24174L*	1.03	0.93	1.11	1.13	58CTW070-16		
CAP**30144L*	1.03	0.98	1.07	1.16	59*P2A040E14**10		
CAP**30144L*	1.04	0.95	1.11	1.16	59*P2A060E14**12		
CAP**30144L*	1.03	1.03	1.07	1.19	59*P5A040E14**10		
CAP**30144L*	1.03	0.94	1.08	1.15	58PH*045-08		
CAP**30144L*	1.03	0.94	1.10	1.13	58CTW045-12		
CAP**30174L*	1.03	0.99	1.08	1.16	59*P2A040E14**10		
CAP**30174L*	1.03	0.99	1.12	1.16	59*P2A040E17**12		
CAP**30174L*	1.04	0.95	1.11	1.12	59*P2A060E14**12		
CAP**30174L*	1.03	1.03	1.07	1.18	59*P5A040E14**10		
CAP**30174L*	1.02	0.97	1.07	1.17	59*P5A040E17**12		
CAP**30174L*	1.03	0.94	1.09	1.15	59PH*045-08		
CAP**30174L*	1.03	0.94	1.11	1.13	58CTW045-12		
CAP**30174L*	1.04	0.95	1.11	1.12	58CTW070-16		
CNP#*24174L*	1.03	1.03	1.08	1.16	59*P2A040E17**12		
CNP#*24174L*	1.04	0.99	1.11	1.17	59*P2A060E17**14		
CNP#*24174L*	1.04	0.99	1.10	1.14	59*P2A080E17**16		
CNP#*24174L*	1.03	1.03	1.09	1.11	58CTW070-16		
CNP#*30174L*	1.03	1.03	1.08	1.16	59*P2A040E17**12		
CNP#*30174L*	1.02	1.02	1.07	1.17	59*P5A040E17**12		
CNP#*30174L*	1.04	0.99	1.11	1.12	58CTW070-16		
CNP#*31174L*	1.06	1.01	1.09	1.14	59*P2A060E17**12		
CNP#*31174L*	1.04	0.99	1.09	1.16	59*P5A040E17**12		
CNP#*31174L*	1.07	0.97	1.12	1.10	58CTW070-16		
CNP#*24144L*	1.00	0.95	1.07	1.16	59*P2A040E14**10		
CNP#*24144L*	1.02	0.97	1.09	1.13	59*P2A060E14**12		
CNP#*24144L*	1.01	1.01	1.07	1.20	59*P5A040E14**10		
CNP#*24144L*	1.01	0.96	1.08	1.15	59PH*045-08		
CNP#*24144L*	1.01	0.96	1.08	1.11	58CTW045-12		
CNP#*24174L*	1.00	0.95	1.07	1.16	59*P2A040E14**10		
CNP#*24174L*	1.00	0.95	1.07	1.16	59*P2A040E17**12		
CNP#*24174L*	1.02	0.97	1.09	1.13	59*P2A060E14**12		
CNP#*24174L*	1.01	1.01	1.07	1.20	59*P5A040E14**10		
CNP#*24174L*	0.99	0.99	1.07	1.17	59*P5A040E17**12		
CNP#*24174L*	1.01	0.96	1.08	1.15	59PH*045-08		

	2-STAGE (Hi-Stage 5, Lo-Stage 2)					Furnace Model
	Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	
2-STAGE (Hi-Stage 5, Lo-Stage 2)	CNVP*2417AL*	1.01	0.96	1.08	1.11	58CTW045-12
	CNVP*2417AL*	1.01	0.96	1.08	1.11	58CTW070-16
	CNVP*3014AL*	1.02	0.97	1.07	1.15	59*P2A040E14**12
	CNVP*3014AL*	1.03	0.99	1.11	1.16	59*P2A060E14**12
	CNVP*3014AL*	1.03	1.03	1.07	1.19	59*P5A040E14**10
	CNVP*3014AL*	1.03	0.98	1.08	1.15	58PH*045-08
	CNVP*3014AL*	1.03	0.98	1.10	1.13	58CTW045-12
	CNVP*3017AL*	1.03	0.98	1.08	1.15	59*P2A040E14**10
	CNVP*3017AL*	1.03	0.98	1.08	1.16	59*P2A040E17**12
	CNVP*3017AL*	1.03	0.94	1.12	1.16	59*P2A060E14**12
	CNVP*3017AL*	1.03	1.03	1.07	1.18	59*P5A040E14**10
	CNVP*3017AL*	1.01	0.96	1.07	1.17	59*P5A040E17**12
	CNVP*3017AL*	1.03	0.99	1.09	1.15	58PH*045-08
	CNVP*3017AL*	1.03	0.93	1.11	1.13	58CTW045-12
	CNVP*3017AL*	1.03	0.94	1.11	1.12	58CTW070-16
	CNVP*3117AL*	1.05	0.96	1.11	1.16	59*P2A040E14**10
	CNVP*3117AL*	1.04	0.99	1.09	1.15	59*P2A040E17**12
	CNVP*3117AL*	1.06	0.96	1.13	1.14	59*P2A060E14**12
	CNVP*3117AL*	1.05	1.05	1.08	1.16	59*P5A040E14**10
	CNVP*3117AL*	1.03	0.99	1.09	1.16	59*P5A040E17**12
	CNVP*3117AL*	1.05	0.96	1.12	1.15	58PH*045-08
	CNVP*3117AL*	1.06	0.96	1.12	1.11	58CTW045-12
	CNVP*3117AL*	1.07	0.97	1.12	1.10	58CTW070-16
	CSPH*2412AL*	1.04	0.99	1.10	1.27	59*P2A040E14**10
	CSPH*2412AL*	1.04	0.94	1.10	1.28	59*P2A040E17**12
	CSPH*2412AL*	1.03	0.94	1.09	1.13	59*P2A060E14**12
	CSPH*2412AL*	1.06	0.96	1.13	1.19	59*P2A060E17**14
	CSPH*2412AL*	1.05	0.98	1.12	1.16	59*P2A080E17**16
CSPH*2412AL*	1.03	1.03	1.07	1.19	59*P5A040E14**10	
CSPH*2412AL*	1.04	1.04	1.10	1.26	59*P5A040E17**12	
CSPH*2412AL*	1.05	1.00	1.10	1.20	59*P5A060E17**14	
CSPH*2412AL*	1.05	1.00	1.09	1.11	58CTW070-16	
CSPH*3012AL*	1.05	0.96	1.13	1.19	58CTW090-16	
CSPH*3012AL*	1.05	1.00	1.09	1.15	59*P2A040E14**10	
CSPH*3012AL*	1.08	1.03	1.12	1.19	59*P2A060E14**12	
CSPH*3012AL*	1.03	1.03	1.08	1.19	59*P5A040E14**10	
CSPH*3012AL*	1.03	0.98	1.08	1.16	59*P5A040E17**12	
CSPH*3012AL*	1.03	0.94	1.11	1.12	58CTW045-12	
CSPH*3012AL*	1.04	0.95	1.11	1.12	58CTW070-16	
CSPH*3012AL*	1.06	0.96	1.14	1.17	58CTW090-16	

35

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB ° F (° C)	EVAP AIR EWB ° F (° C)	24VNA0957 FEAXNP005 Comfort + Dehumidify Mode Condenser Entering Air Temperature ° F (° C)																																																						
		105 (40.5)					95 (35)					85 (29.4)					75 (23.9)					65 (18.3)																																		
		ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW																																			
			Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit		Total	Sensit	Total	Sensit																															
75 (23.9)	72	608	19.25	8.01	1.62	25.24	10.26	1.88	634	26.68	10.84	1.61	663	28.11	11.43	1.34	708	29.64	12.06	1.07																																				
	67																				22.98	13.18	1.89	24.31	13.92	1.63	25.64	14.68	1.38																											
	63																													21.29	15.45	1.90	22.54	16.31	1.65	23.79	17.21	1.41																		
	57																																						19.10	18.78	1.90	20.23	19.83	1.66	21.37	20.92	1.44									
	72																																															25.12	13.12	1.88	26.55	13.85	1.60	27.98	14.60	1.33
67	22.91	16.02	1.89	24.24	16.91	1.63	25.56	17.83	1.38																																															
63										21.26	18.28	1.90	22.51	19.29	1.65	23.76	20.35	1.41																																						
57																			20.08	20.08	1.90	21.23	21.23	1.66	22.41	22.41	1.42																													
(13.9)																																																								
75 (23.9)	72	437	15.62	6.37	1.16	16.33	6.64	1.03	452	17.27	7.02	0.91	475	18.26	7.42	0.78	510	19.32	7.87	0.82																																				
	67																				14.19	8.25	1.17	14.88	8.57	1.04	15.74	9.03	0.94	16.66	9.56	0.82																								
	63																																13.12	9.74	1.18	13.79	10.07	1.05	14.60	10.61	0.96	15.46	11.23	0.85												
	57																																												11.80	11.80	1.18	12.35	12.27	1.06	13.08	12.91	0.97	13.87	13.68	0.88
	72																																																							
67	14.83	10.44	1.04	15.69	10.99	0.94	16.60	11.63	0.82																																															
63										13.11	11.59	1.18	13.77	11.94	1.05	14.58	12.56	0.96	15.44	13.30	0.85																																			
57																						13.05	13.05	1.05	13.78	13.78	0.97	14.60	14.60	0.86																										
(13.9)																																																								
75 (23.9)	72	342	6.36	2.59	0.47	9.26	3.75	0.47	250	9.75	3.95	0.47	250	10.23	4.15	0.43	250	10.72	4.35	0.36																																				
	67																				10.72	6.18	0.76	8.39	4.68	0.48	8.84	4.89	0.49	9.27	5.09	0.47																								
	63																																9.90	7.24	0.76	7.74	5.40	0.49	8.15	5.61	0.51	8.56	5.83	0.49												
	57																																												8.82	8.81	0.77	6.85	6.46	0.49	7.22	6.68	0.52	7.59	6.90	0.52
	72																																																							
67	8.37	5.60	0.48	8.81	5.82	0.49	9.25	6.03	0.47																																															
63										7.72	6.32	0.49	8.14	6.54	0.51	8.54	6.76	0.49																																						
57																			7.09	7.09	0.49	7.40	7.40	0.52	7.70	7.70	0.51																													
(13.9)																																																								
75 (23.9)	72	342	3.18	1.29	0.24	8.99	3.64	0.47	222	9.59	3.89	0.48	229	9.99	4.06	0.44	245	10.66	4.33	0.36																																				
	67																				10.72	6.18	0.76	8.68	4.76	0.50	9.04	4.92	0.48																											
	63																													9.90	7.24	0.76	8.00	5.44	0.51	8.34	5.58	0.50																		
	57																																						8.82	8.81	0.77	7.09	6.43	0.52	7.39	6.56	0.52									
	72																																															8.96	4.47	0.47	9.55	4.76	0.47	9.96	4.92	0.44
67	8.11	5.28	0.48	8.66	5.63	0.50	9.02	5.78	0.48																																															
63										7.48	5.91	0.49	7.99	6.31	0.51	8.33	6.44	0.50																																						
57																			6.73	6.73	0.49	7.19	7.19	0.52	7.40	7.40	0.52																													
(13.9)																																																								
80 (26.7)	72	342	9.35	9.35	0.77	7.09	7.09	0.49	250	7.40	7.40	0.52	250	7.70	7.70	0.51	245	8.00	8.00	0.48																																				

24VNA925

COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL
*FE4AN(B,F)005L		1.00	1.00	
FE4AN(B,F)003L		0.96	0.98	
FE4ANB006L		0.98	1.07	
FE4ANF002L		0.96	0.98	
CAP**3614L*		0.98	1.01	58CV(A,X)070-12
CAP**3617L*		0.98	1.01	58CV(A,X)070-12
CNPV*3617AL*		0.98	1.02	58CV(A,X)070-12
CNPV*3617AL*		0.97	0.99	58CV(A,X)070-12
CNPV*3717AL*		0.98	1.00	58CV(A,X)070-12
CNPV*4217AL*		0.96	0.98	58CV(A,X)070-12
CSPH*3612AL*		1.00	1.02	58CV(A,X)070-12
CSPH*4212AL*		1.00	1.02	58CV(A,X)070-12
CAP**3617AL*		0.98	1.01	58CV(A,X)090-16
CAP**3621AL*		0.98	1.01	58CV(A,X)090-16
CAP**4221AL*		0.99	0.99	58CV(A,X)090-16
CNPV*3617AL*		0.98	1.01	58CV(A,X)090-16
CNPV*4221AL*		0.99	1.02	58CV(A,X)090-16
CNPV*3617AL*		0.97	0.99	58CV(A,X)090-16
CNPV*3621AL*		0.98	0.98	58CV(A,X)090-16
CNPV*3717AL*		0.98	0.98	58CV(A,X)090-16
CNPV*4217AL*		0.96	0.98	58CV(A,X)090-16
CNPV*4221AL*		0.96	0.98	58CV(A,X)090-16
CSPH*3612AL*		1.00	1.00	58CV(A,X)090-16
CSPH*4212AL*		1.01	1.01	58CV(A,X)090-16
CAP**3617AL*		0.98	1.02	59*N*A060V17**14
CAP**3621AL*		0.98	1.01	59*N*A060V17**14
CAP**4221AL*		0.98	1.01	59*N*A060V17**14
CNPV*3617AL*		0.98	1.11	59*N*A060V17**14
CNPV*4221AL*		0.98	1.12	59*N*A060V17**14
CNPV*3617AL*		0.94	1.02	59*N*A060V17**14
CNPV*3621AL*		0.94	1.02	59*N*A060V17**14
CNPV*4217AL*		0.98	1.00	59*N*A060V17**14
CNPV*4221AL*		0.95	1.03	59*N*A060V17**14
CSPH*3612AL*		0.99	1.02	59*N*A060V17**14
CSPH*4212AL*		1.00	1.02	59*N*A060V17**14
CAP**3617AL*		0.98	1.01	59*N*A080V17**14
CAP**3621AL*		0.98	1.01	59*N*A080V17**14
CAP**4221AL*		0.99	1.02	59*N*A080V17**14
CNPV*3617AL*		0.98	1.07	59*N*A080V17**14
CNPV*4221AL*		0.99	1.08	59*N*A080V17**14
CNPV*3617AL*		0.95	1.03	59*N*A080V17**14
CNPV*3621AL*		0.95	0.99	59*N*A080V17**14
CNPV*3717AL*		0.98	1.00	59*N*A080V17**14
CNPV*4221AL*		0.98	1.00	59*N*A080V17**14
CSPH*3612AL*		1.00	1.02	59*N*A080V17**14
CSPH*4212AL*		1.00	1.02	59*N*A080V17**14
CAP**3621AL*		0.98	1.01	59MNT*A060V21**20
CAP**4221AL*		0.99	1.02	59MNT*A060V21**20
CAP**4221AL*		0.99	1.02	59MNT*A060V21**20

		2-STAGE (HI-Stage 5, Lo-Stage 2)					Furnace Model
		Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	
		FVAC(BN,F)003L	0.94	0.98	0.99	0.94	
		FVAC(BN)002L	0.94	0.98	1.00	0.97	
		CAP**2414A*	0.94	1.02	1.08	1.12	58PH*045-08
		CAP**2417A*	0.94	1.02	1.09	1.12	58PH*045-08
		CAP**3014A*	0.95	0.99	1.08	1.11	58PH*045-08
		CAP**3017A*	0.95	0.99	1.09	1.11	58PH*045-08
		CNPV*2414A*	0.93	1.01	1.08	1.12	58PH*045-08
		CNPV*2417A*	0.93	1.01	1.08	1.12	58PH*045-08
		CNPV*3014A*	0.95	1.03	1.08	1.11	58PH*045-08
		CNPV*3017A*	0.95	1.03	1.09	1.11	58PH*045-08
		CNPV*3117A*	0.95	0.99	1.12	1.11	58PH*045-08
		CAP**2414A*	0.93	0.97	1.08	1.08	58CTW045-12
		CAP**2417A*	0.94	0.98	1.08	1.07	58CTW045-12
		CAP**3014A*	0.93	0.96	1.10	1.09	58CTW045-12
		CAP**3017A*	0.93	0.97	1.11	1.09	58CTW045-12
		CNPV*2414A*	0.93	1.01	1.08	1.07	58CTW045-12
		CNPV*2417A*	0.93	1.01	1.08	1.07	58CTW045-12
		CNPV*3014A*	0.93	1.01	1.10	1.09	58CTW045-12
		CNPV*3017A*	0.93	0.97	1.11	1.08	58CTW045-12
		CNPV*3117A*	0.94	0.98	1.12	1.08	58CTW045-12
		CSPH*3012A*	0.93	0.96	1.11	1.08	58CTW045-12
		CAP**2417A*	0.93	0.96	1.11	1.09	58CTW070-16
		CAP**3017A*	0.93	0.97	1.11	1.08	58CTW070-16
		CNPV*2417A*	0.93	1.01	1.08	1.07	58CTW070-16
		CNPV*3017A*	0.93	0.97	1.11	1.08	58CTW070-16
		CSPH*2412A*	0.95	0.99	1.12	1.05	58CTW070-16
		CSPH*2412A*	0.93	1.01	1.08	1.07	58CTW070-16
		CSPH*2412A*	0.93	0.97	1.11	1.07	58CTW070-16
		CSPH*2412A*	0.94	0.98	1.13	1.15	58CTW090-16
		CSPH*3012A*	0.95	0.99	1.14	1.12	59P*P2A040E14**10
		CAP**2414A*	0.95	1.03	1.08	1.13	59P*P2A040E14**10
		CAP**2417A*	0.93	1.01	1.08	1.13	59P*P2A040E14**10
		CAP**3014A*	0.94	1.02	1.07	1.12	59P*P2A040E14**10
		CAP**3017A*	0.95	1.03	1.08	1.12	59P*P2A040E14**10
		CNPV*2414A*	0.93	1.01	1.07	1.13	59P*P2A040E14**10
		CNPV*2417A*	0.93	1.01	1.07	1.13	59P*P2A040E14**10
		CNPV*3014A*	0.94	1.02	1.07	1.12	59P*P2A040E17**12
		CNPV*3017A*	0.95	1.03	1.08	1.12	59P*P2A040E17**12
		CNPV*3117A*	0.94	0.98	1.11	1.11	59P*P2A040E17**12
		CSPH*2412A*	0.96	1.04	1.10	1.23	59P*P2A040E17**12
		CSPH*3012A*	0.97	1.05	1.09	1.11	59P*P2A040E17**12
		CAP**2417A*	0.93	1.01	1.07	1.12	59P*P2A040E17**12
		CAP**3017A*	0.95	1.03	1.08	1.13	59P*P2A040E17**12
		CNPH*2417A*	0.95	1.08	1.10	1.13	59P*P2A040E17**12
		CNPH*3017A*	0.93	1.03	1.08	1.12	59P*P2A040E17**12
		CNPH*3117A*	0.95	1.08	1.12	1.13	59P*P2A040E17**12
		CNPH*3117A*	0.95	1.03	1.08	1.13	59P*P2A040E17**12
		CSPH*2412A*	0.96	1.04	1.10	1.25	59P*P2A040E17**12
		CAP**2414A*	0.94	0.98	1.09	1.10	59P*P2A060E14**12
		CAP**2417A*	0.93	0.99	1.10	1.11	59P*P2A060E14**12
		CAP**3014A*	0.93	0.97	1.11	1.11	59P*P2A060E14**12
		CAP**3017A*	0.95	1.03	1.08	1.12	59P*P2A060E14**12

2-STAGE (HI-Stage 5, Lo-Stage 2)					
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model
CAP**3017AL*	0.94	0.98	1.12	1.11	59*P2A060E14**12
CNPV*2414AL*	0.94	1.02	1.09	1.09	59*P2A060E14**12
CNPV*2417AL*	0.94	1.02	1.09	1.09	59*P2A060E14**12
CNPV*3014AL*	0.93	1.01	1.11	1.11	59*P2A060E14**12
CNPV*3017AL*	0.94	0.98	1.12	1.11	59*P2A060E14**12
CNPV*3117AL*	0.96	1.00	1.13	1.09	59*P2A060E14**12
CSPH*2412AL*	0.95	0.99	1.09	1.10	59*P2A060E14**12
CSPH*3012AL*	0.94	0.98	1.12	1.10	59*P2A060E14**12
CNPV*2417AL*	0.96	1.04	1.11	1.13	59*P2A060E17**14
CSPH*2412AL*	0.95	0.99	1.13	1.15	59*P2A060E17**14
CNPV*2417AL*	0.96	1.04	1.10	1.10	59*P2A080E17**16
CSPH*2412AL*	0.94	0.98	1.12	1.12	59*P2A080E17**16
CAP**2414AL*	0.93	1.06	1.07	1.17	59*P5A040E14**10
CAP**3017AL*	0.94	1.07	1.07	1.17	59*P5A040E14**10
CAP**3014AL*	0.95	1.08	1.07	1.16	59*P5A040E14**10
CAP**3017AL*	0.95	1.08	1.07	1.15	59*P5A040E14**10
CNPV*2414AL*	0.93	1.11	1.07	1.17	59*P5A040E14**10
CNPV*2417AL*	0.93	1.11	1.07	1.17	59*P5A040E14**10
CNPV*3014AL*	0.95	1.08	1.07	1.16	59*P5A040E14**10
CNPV*3017AL*	0.95	1.08	1.07	1.15	59*P5A040E14**10
CNPV*3117AL*	0.98	1.11	1.08	1.13	59*P5A040E14**10
CSPH*2412AL*	0.95	1.08	1.07	1.17	59*P5A040E14**10
CSPH*3012AL*	0.95	1.08	1.07	1.15	59*P5A040E14**10
CAP**2417AL*	0.93	1.01	1.07	1.14	59*P5A040E17**12
CAP**3017AL*	0.93	1.01	1.07	1.13	59*P5A040E17**12
CNPV*2417AL*	0.94	1.12	1.08	1.15	59*P5A040E17**12
CNPV*3017AL*	0.93	1.06	1.07	1.13	59*P5A040E17**12
CNPV*3117AL*	0.96	1.04	1.09	1.12	59*P5A040E17**12
CNPV*2417AL*	0.92	1.04	1.07	1.14	59*P5A040E17**12
CNPV*3017AL*	0.93	1.01	1.07	1.13	59*P5A040E17**12
CNPV*3117AL*	0.96	1.04	1.09	1.12	59*P5A040E17**12
CSPH*2412AL*	0.96	1.09	1.10	1.23	59*P5A040E17**12
CSPH*3012AL*	0.93	1.01	1.08	1.13	59*P5A040E17**12
CNPV*2417AL*	0.96	1.09	1.10	1.17	59*P5A040E17**14

See notes on page 48

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

24VNA368 / FEANF005 Comfort + Ductumity More Condenser Entering Air Temperature ° F (° C)																							
EDB ° F (° C)	EVAP. AIR ° F (° C)		105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)				
			ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW					
				Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit		Total	Sensit	Total	Sensit	
STAGE 5																							
75 (23.9)	72 (22.2)	812	35.03	14.21	3.80	812	36.79	14.91	3.28	848	38.97	15.79	2.81	887	41.14	16.67	2.38	948	43.43	17.61	1.97		
	67 (19.4)		32.03	18.10	3.76		33.69	18.87	3.26		35.70	19.98	2.81		37.69	21.10	2.39		39.83	22.39	2.00		
	63 (17.2)		29.78	21.12	3.72		31.34	21.94	3.23		33.23	23.22	2.80		35.10	24.53	2.40		37.11	26.09	2.02		
	57 (13.9)		26.68	25.51	3.66		28.08	26.39	3.19		29.78	27.92	2.78		31.49	29.50	2.40		33.35	31.47	2.04		
	72 (22.2)		34.90	17.98	3.79		36.65	18.72	3.28		38.82	19.81	2.81		40.96	20.92	2.37		43.26	22.19	1.97		
80 (26.7)	67 (19.4)	812	31.95	21.83	3.75	812	33.60	22.64	3.25	848	35.61	23.95	2.81	887	37.60	25.30	2.39	948	39.72	26.91	2.00		
	63 (17.2)		29.73	24.84	3.72		31.29	25.70	3.23		33.16	27.18	2.80		35.04	28.72	2.39		37.04	30.61	2.02		
	57 (13.9)		27.71	27.71	3.68		28.95	28.95	3.20		30.66	30.66	2.78		32.41	32.41	2.40		34.42	34.42	2.04		
	STAGE 3																						
	72 (22.2)		21.74	8.83	1.80		22.72	9.22	1.63		24.20	9.82	1.47		25.61	10.39	1.30		27.10	11.00	1.09		
75 (23.9)	67 (19.4)	566	19.76	11.28	1.80	566	20.72	11.74	1.64	600	22.09	12.54	1.49	626	23.39	13.27	1.33	664	24.77	14.10	1.14		
	63 (17.2)		18.28	13.20	1.80		19.22	13.70	1.63		20.51	14.65	1.50		21.73	15.51	1.35		23.02	16.51	1.18		
	57 (13.9)		16.37	16.02	1.79		17.25	16.59	1.63		18.42	17.76	1.51		19.53	18.80	1.37		20.72	20.04	1.21		
	72 (22.2)		21.65	11.25	1.80		22.62	11.67	1.63		24.08	12.45	1.47		25.49	13.17	1.29		26.96	13.99	1.09		
	67 (19.4)		19.70	13.69	1.80		20.66	14.18	1.63		22.03	15.15	1.49		23.32	16.03	1.33		24.69	17.07	1.14		
80 (26.7)	63 (17.2)	566	18.26	15.60	1.80	566	19.20	16.13	1.63	600	20.48	17.26	1.50	626	21.70	18.27	1.35	664	22.99	19.47	1.17		
	57 (13.9)		17.18	17.18	1.80		17.96	17.96	1.63		19.20	19.20	1.50		20.34	20.34	1.36		21.61	21.61	1.20		
	STAGE 1 – FEANF005 ONLY																						
	72 (22.2)		14.50	5.90	0.99		9.48	3.84	0.49		10.07	4.08	0.49		10.66	4.32	0.45		11.47	4.65	0.35		
	67 (19.4)		417	13.17	7.58		1.00	250	8.59		4.79	0.50	250		9.13	5.04	0.52		250	9.66	5.30	0.49	267
63 (17.2)	12.18	8.91		1.00	7.92	5.53	0.51		8.42	5.80	0.53	8.92		6.07	0.51	9.60	6.55	0.45					
57 (13.9)	10.89	10.84		1.01	7.02	6.61	0.52		7.46	6.90	0.55	7.91		7.19	0.54	8.52	7.77	0.49					
80 (26.7)	72 (22.2)	417	14.44	7.57	0.99	250	9.44	4.79	0.49	250	10.03	5.04	0.49	250	10.62	5.30	0.45	267	11.43	5.71	0.35		
	67 (19.4)		13.13	9.25	1.00		8.56	5.73	0.50		9.10	6.01	0.52		9.64	6.28	0.49		10.36	6.78	0.41		
	63 (17.2)		12.16	10.56	1.00		7.91	6.47	0.51		8.41	6.76	0.53		8.91	7.05	0.51		9.58	7.61	0.45		
	57 (13.9)		11.52	11.52	1.01		7.26	7.26	0.52		7.64	7.64	0.54		8.03	8.03	0.54		8.66	8.66	0.48		
	STAGE 1 – ALL OTHER INDOOR COMBINATIONS																						
75 (23.9)	72 (22.2)	417	14.50	5.90	0.99	236	9.35	3.79	0.49	232	9.88	4.01	0.50	246	10.62	4.30	0.45	267	11.47	4.65	0.35		
	67 (19.4)		13.17	7.58	1.00		8.46	4.68	0.50		8.94	4.90	0.52		9.62	5.27	0.49		10.39	5.71	0.41		
	63 (17.2)		12.18	8.91	1.00		7.80	5.37	0.51		8.25	5.59	0.53		8.88	6.02	0.51		9.60	6.55	0.45		
	57 (13.9)		10.89	10.84	1.01		6.91	6.39	0.52		7.30	6.60	0.55		7.87	7.12	0.54		8.52	7.77	0.49		
	72 (22.2)		417	14.44	7.57		0.99	236	9.31		4.68	0.49	232		9.84	4.90	0.50		246	10.58	5.27	0.45	267
67 (19.4)	13.13	9.25		1.00	8.44	5.57	0.50		8.92	5.79	0.52	9.60		6.23	0.49	10.36	6.78	0.41					
63 (17.2)	12.16	10.56		1.00	7.79	6.26	0.51		8.23	6.48	0.53	8.87		6.98	0.51	9.58	7.61	0.45					
57 (13.9)	11.52	11.52		1.01	7.08	7.08	0.52		7.39	7.39	0.55	7.97		7.97	0.54	8.66	8.66	0.48					

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 48

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

24VNA936

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*FE4AN(B,F)005L	1.00	1.00	
FE4AN(B,F)003L	0.97	0.97	
FE4AN(B)006L	0.99	0.99	
FE4ANF002L	0.96	1.01	
CAP**3614AL*	0.98	1.03	58CV(A,X)070-12
CSPH*3612AL*	0.98	1.03	58CV(A,X)070-12
CSPH*4212AL*	0.98	1.03	58CV(A,X)070-12
CAP**3617AL*	0.98	0.98	58CV(A,X)090-16
CAP**4817AL*	0.98	0.98	58CV(A,X)090-16
CNPV*3617AL*	0.95	1.00	58CV(A,X)090-16
CNPV*3617AL*	0.95	1.00	58CV(A,X)090-16
CNPV*3717AL*	0.97	0.97	58CV(A,X)090-16
CNPV*4217AL*	0.97	0.97	58CV(A,X)090-16
CNPV*4821AL*	0.97	1.01	58CV(A,X)090-16
CNPV*4821AL*	0.98	0.98	58CV(A,X)090-16
CSPH*3612AL*	0.98	0.98	58CV(A,X)090-16
CSPH*4212AL*	0.98	0.98	58CV(A,X)090-16
CAP**3617AL*	0.97	1.02	59*N*A060V17**14
CAP**4817AL*	0.98	1.03	59*N*A060V17**14
CNPV*3617AL*	0.95	1.05	59*N*A060V17**14
CNPV*3617AL*	0.95	1.05	59*N*A060V17**14
CNPV*3717AL*	0.97	1.02	59*N*A060V17**14
CNPV*4217AL*	0.95	1.00	59*N*A060V17**14
CNPV*4217AL*	0.95	1.05	59*N*A060V17**14
CNPV*4821AL*	0.97	1.02	59*N*A060V17**14
CSPH*3612AL*	0.97	1.02	59*N*A060V17**14
CSPH*4212AL*	0.98	1.03	59*N*A060V17**14
CSPH*4821AL*	0.98	1.03	59*N*A060V17**14
CAP**3617AL*	0.98	1.03	59*N*A060V17**14
CAP**4817AL*	0.98	1.03	59*N*A060V17**14
CNPV*3617AL*	0.95	1.05	59*N*A060V17**14
CNPV*3617AL*	0.95	1.05	59*N*A060V17**14
CNPV*3717AL*	0.97	1.02	59*N*A060V17**14
CNPV*4217AL*	0.96	1.01	59*N*A060V17**14
CNPV*4217AL*	0.95	1.00	59*N*A060V17**14
CNPV*4821AL*	0.97	1.02	59*N*A060V17**14
CSPH*3612AL*	0.98	1.03	59*N*A060V17**14
CSPH*4212AL*	0.98	1.03	59*N*A060V17**14
CSPH*4821AL*	0.98	1.03	59*N*A060V17**14
CAP**3621AL*	0.98	1.03	59*N*A060V21**20
CAP**4221AL*	0.97	1.01	59MN7A060V21**20

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CAP**4821AL*	0.98	1.03	59MN7A060V21**20
CNPV*4221AL*	0.96	1.06	59MN7A060V21**20
CNPV*4221AL*	0.96	1.06	59MN7A060V21**20
CNPV*4321AL*	0.98	1.03	59MN7A060V21**20
CNPV*4821AL*	0.97	1.02	59MN7A060V21**20
CNPV*3621AL*	0.95	1.00	59MN7A060V21**20
CNPV*4221AL*	0.95	1.00	59MN7A060V21**20
CNPV*4221AL*	0.96	1.01	59MN7A060V21**20
CNPV*4324AL*	0.98	1.03	59MN7A060V21**20
CNPV*4821AL*	0.97	1.02	59MN7A060V21**20
CNPV*4821AL*	0.97	1.02	59MN7A060V21**20
CSPH*3612AL*	0.98	1.03	59MN7A060V21**20
CSPH*4212AL*	0.98	1.03	59MN7A060V21**20
CSPH*4812AL*	0.98	1.03	59MN7A060V21**20

2-STAGE (HI-Stage 5, Lo-Stage 2)				
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Furnace Model
FV4CNCB.FI003L	0.97	1.01	1.06	
FV4CNCB.FI002L	0.97	1.01	0.99	1.08
CAP**3614AL*	0.96	1.06	0.97	1.09
CAP**3617AL*	0.97	1.07	0.97	1.08
CAP**3614AL*	0.96	1.01	0.97	1.07
CAP**3617AL*	0.97	1.01	0.97	1.06
CAP**3617AL*	0.97	1.02	0.98	1.05
CAP**3621AL*	0.97	1.02	0.98	1.04
CAP**4221AL*	0.98	1.03	0.99	1.05
CNPV*3617AL*	0.97	1.01	0.97	1.05
CNPV*3617AL*	0.97	1.01	0.97	1.05
CNPV*3717AL*	1.01	1.00	1.00	1.03
CNPV*4217AL*	0.99	1.04	0.99	1.05
CAP**3621AL*	0.97	0.97	0.98	1.02
CAP**4221AL*	0.98	0.98	0.99	1.03
CNPV*4221AL*	0.98	0.98	0.98	1.03
CNPV*4321AL*	1.01	1.01	1.01	1.01
CNPV*3621AL*	0.97	1.01	0.97	1.03
CNPV*4221AL*	0.98	0.98	0.98	1.03
CNPV*3621AL*	0.97	0.97	0.97	1.02
CNPV*4221AL*	0.98	0.98	0.98	1.02
CNPV*4324AL*	1.02	0.97	1.01	0.98
CAP**3617AL*	0.96	1.06	0.97	1.12
CAP**3621AL*	0.96	1.06	0.97	1.11
CAP**4221AL*	0.97	1.07	0.97	1.10
CNPV*3617AL*	0.95	1.05	0.96	1.11
CNPV*3717AL*	1.00	1.05	0.99	1.09
CNPV*4217AL*	0.98	1.08	0.98	1.11
CSPH*3612AL*	0.98	1.09	0.98	1.10
CAP**3614AL*	0.97	1.01	0.98	1.07
CSPH*3612AL*	0.99	1.04	0.99	1.06
CAP**3617AL*	0.97	1.02	0.98	1.05
CAP**3621AL*	0.97	1.02	0.98	1.04
CAP**4221AL*	0.98	0.98	0.99	1.04
CNPV*3617AL*	0.97	1.01	0.97	1.05

See notes on page 48

2-STAGE (HI-Stage 5, Lo-Stage 2)				
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Furnace Model
CNPV*3617AL*	0.97	1.01	0.97	59*P2A060E17**14
CNPV*3717AL*	1.01	1.01	1.00	59*P2A060E17**14
CNPV*4217AL*	0.99	0.99	0.99	59*P2A060E17**14
CSPH*4217AL*	0.99	0.99	0.99	59*P2A060E17**14
CNPV*3617AL*	0.97	1.02	0.98	59*P2A060E17**14
CAP**4221AL*	0.98	0.98	0.98	59*P2A060E17**16
CAP**4221AL*	0.98	0.98	0.99	59*P2A060E17**16
CNPV*3617AL*	0.97	1.01	0.97	59*P2A060E17**16
CNPV*3717AL*	1.01	1.01	1.00	59*P2A060E17**16
CNPV*4217AL*	0.99	0.99	0.99	59*P2A060E17**16
CAP**3617AL*	0.96	1.12	0.96	59*P5A040E17**12
CAP**3621AL*	0.96	1.12	0.96	59*P5A040E17**12
CAP**4221AL*	0.97	1.13	0.96	59*P5A040E17**12
CNPV*3617AL*	0.95	1.11	0.95	59*P5A040E17**12
CNPV*3617AL*	0.95	1.11	0.95	59*P5A040E17**12
CNPV*4217AL*	1.00	1.11	0.98	59*P5A040E17**12
CNPV*4217AL*	0.98	1.08	0.97	59*P5A040E17**12
CAP**3614AL*	0.95	1.11	0.96	59*P5A060E14**12
CAP**3617AL*	0.96	1.12	0.97	59*P5A060E14**12
CAP**3621AL*	0.97	1.01	0.97	59*P5A060E17**14
CAP**4221AL*	0.97	1.02	0.98	59*P5A060E17**14
CNPV*3617AL*	0.96	1.01	0.97	59*P5A060E17**14
CNPV*3717AL*	1.00	1.05	0.99	59*P5A060E17**14
CNPV*4217AL*	0.98	1.03	0.98	59*P5A060E17**14

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB ° F (° C)	EVAP AIR EWB ° F (° C)	24VNA937 / FE4ANB06L Comfort + Dehumidify Mode Condenser Entering Air Temperature ° F (° C)																																																																												
		105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)																																																												
		ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW																																																									
			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†		Total	Sens†																																																							
STAGE 5																																																																														
75 (23.9)	72 (22.2)	812	33.61	13.66	2.96	2.51	14.41	35.51	15.36	37.87	16.34	2.15	1.81	40.27	17.40	1.51	948																																																													
	67 (19.4)																					812	30.54	17.52	2.94	2.50	18.33	32.28	19.52	34.42	20.75	2.15	1.83	36.60	22.16	1.53																																										
	63 (17.2)																																				812	28.29	20.54	2.93	2.49	21.40	29.92	22.77	31.90	24.19	1.84	36.07	25.89	1.55																												
	57 (13.9)																																																		812	25.29	24.94	2.90	2.47	25.90	26.74	27.52	28.50	29.23	31.32	1.58																
	72 (22.2)																																																														812	33.51	17.49	2.96	2.51	18.30	35.42	19.49	37.77	20.72	2.15	1.81	42.74	22.14	1.51	
67 (19.4)	812	30.47	21.31	2.94	2.50	22.18	32.21	23.59	34.35	25.07	2.15	1.83	36.52	26.84	1.53																																																															
63 (17.2)																812	28.24	24.31	2.93	2.49	25.23	29.87	26.83	31.85	28.50	1.84	36.02	30.55	1.55																																																	
57 (13.9)																														812	26.63	26.63	2.91	2.48	27.94	29.75	29.75	31.61	31.61	1.84	33.74	33.74	1.57																																			
STAGE 3																																																																														
75 (23.9)	72 (22.2)	566	22.84	9.26	2.06	1.72	9.84	24.29	10.57	26.09	11.27	1.47	1.23	27.82	12.04	1.01	665																																																													
	67 (19.4)																					566	20.67	11.68	2.07	1.74	12.30	21.98	13.23															23.60	14.10	1.28	1.07	25.16	15.10	1.07																												
	63 (17.2)																													566	19.09	13.58	2.08	1.75	14.24	20.29	15.33	21.79	16.32	1.31	1.11	23.23	17.51								1.11																											
	57 (13.9)																																																			566	17.03	16.40	2.08	1.77	17.12	18.10	18.43	19.44	19.61	1.34	1.15	22.12	21.08	1.15												
	72 (22.2)																																																																		566	22.78	11.70	2.06	1.72	12.32	24.23	13.26	26.03	14.13	1.23	1.01
67 (19.4)	566	20.62	14.10	2.07	1.74	14.77	21.93	15.90	23.55	16.93	1.28	1.07	26.81	18.18	1.07																																																															
63 (17.2)																566	19.06	15.99	2.08	1.75	16.70	20.27	17.98	21.76	19.14	1.31	1.11	24.77	20.57	1.11																																																
57 (13.9)																															566	17.76	17.76	2.08	1.76	18.73	18.73	20.14	20.14	21.44	21.44	1.33	22.97	22.97	1.14																																	
STAGE 1 – FE4ANB06L ONLY																																																																														
75 (23.9)	72 (22.2)	500	18.14	7.36	1.70	0.87	6.00	14.63	6.41	15.69	6.83	0.72	0.57	16.75	6.83	0.57	500																																																													
	67 (19.4)																					500	16.41	9.34	1.72	0.91	7.90	13.27	8.36	14.22																8.83	0.76	0.63	15.17	8.83	0.63	500																										
	63 (17.2)																														500	15.16	10.91	1.74	0.83	9.39	12.27	9.90	13.14	10.41	0.66	0.54	14.01	10.41	0.66											500																						
	57 (13.9)																																																											500	13.54	13.23	1.75	0.96	11.20	11.20	11.91	11.91	12.61	0.71	0.59	13.31	13.30	0.59	500			
	72 (22.2)																																																																													
67 (19.4)	500	16.37	11.32	1.72	0.91	9.78	13.23	9.78	14.18	10.30	0.76	0.63	15.12	10.82	0.63	500																																																														
63 (17.2)																				500	15.14	12.88	1.74	0.93	11.27	12.26	11.83	13.13	12.39	0.66	0.54	14.00	12.39	0.66	500																																											
57 (13.9)																																							500	14.21	14.21	1.74	0.94	11.88	11.88	12.62	12.62	13.36	13.36	0.68	0.57	14.09	14.09	0.57	500																							
STAGE 1 – ALL OTHER INDOOR COMBINATIONS																																																																														
75 (23.9)	72 (22.2)	417	17.38	7.04	1.70	0.92	4.96	12.07	4.96	12.74	5.27	0.79	0.66	13.77	5.69	0.66	267																																																													
	67 (19.4)																					417	15.72	8.68	1.72	0.95	5.83	10.91	5.83	11.51	6.14	0.83	0.70	12.45	6.65	0.70	500																																									
	63 (17.2)																																						417	14.53	9.98	1.73	0.97	6.52	10.07	6.52	10.63	6.83	0.85	0.73	11.49	7.40	0.73	267																								
	57 (13.9)																																																									417			12.94	11.91	1.74	0.98	7.52	8.96	7.52	9.45	7.84	0.87	0.76	10.21	8.50	0.76	500			
	72 (22.2)																																																																													
67 (19.4)	417	15.69	10.34	1.72	0.95	6.72	10.89	6.72	11.49	7.05	0.83	0.70	12.43	7.63	0.70	267																																																														
63 (17.2)																				417	14.50	11.63	1.73	0.97	7.40	10.05	7.40	10.61	7.73	0.85	0.73	11.47	8.38	0.73	267																																											
57 (13.9)																																							417	13.22	13.22	1.74	0.98	8.40	8.95	8.40	9.44	8.73	0.87	0.76	10.21	9.47	0.76	500																								

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 48

24VNA937

[illegible]

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CNPV*6024AL*	0.98	1.02	59*N*1A120V24**22
CNPV*6024AL*	0.99	0.99	58CV(A,X)110-20
CNPV*6024AL*	0.99	0.99	58CV(A,X)135-22
CNPV*6024AL*	0.99	0.99	58CV(A,X)155-22
CSPH*3612AL*	0.01	0.15	59*N*AO60V17***14
CSPH*3612AL*	0.97	1.03	59*N*AO60V17***14
CSPH*3612AL*	0.97	1.03	59MNT*AO60V21**20
CSPH*3612AL*	0.98	1.04	59*N*AO80V21***20
CSPH*3612AL*	0.98	1.04	59*N*1A100V21**22
CSPH*3612AL*	0.98	1.04	59*N*1A120V24**22
CSPH*3612AL*	0.98	1.04	58CV(A,X)070-12
CSPH*3612AL*	0.98	1.02	58CV(A,X)090-16
CSPH*3612AL*	0.98	1.02	58CV(A,X)110-20
CSPH*3612AL*	0.98	1.02	58CV(A,X)135-22
CSPH*3612AL*	0.98	1.02	58CV(A,X)155-22
CSPH*4212AL*	0.01	0.15	59*N*AO60V17***14
CSPH*4212AL*	0.98	1.04	59*N*AO80V17***14
CSPH*4212AL*	0.98	1.04	59MNT*AO60V21**20
CSPH*4212AL*	0.98	1.02	59*N*AO80V21***20
CSPH*4212AL*	0.98	1.02	59*N*1A100V21**22
CSPH*4212AL*	0.98	1.02	59*N*1A120V24**22
CSPH*4212AL*	0.98	1.05	58CV(A,X)070-12
CSPH*4212AL*	0.98	1.02	58CV(A,X)090-16
CSPH*4212AL*	0.98	1.02	58CV(A,X)110-20
CSPH*4212AL*	0.98	1.02	58CV(A,X)135-22
CSPH*4212AL*	0.99	1.03	58CV(A,X)155-22
CSPH*4812AL*	0.01	0.15	59*N*AO60V17***14
CSPH*4812AL*	0.98	1.05	59*N*AO80V17***14
CSPH*4812AL*	0.98	1.05	59MNT*AO60V21**20
CSPH*4812AL*	0.98	1.02	59*N*AO80V21***20
CSPH*4812AL*	0.99	1.03	59*N*1A100V21**22
CSPH*4812AL*	0.99	1.03	59*N*1A120V24**22
CSPH*6012AL*	0.99	1.05	59*N*AO60V17***14
CSPH*6012AL*	0.99	1.05	59*N*AO80V17***14
CSPH*6012AL*	0.99	1.03	59MNT*AO60V21**20
CSPH*6012AL*	0.99	1.03	59*N*AO80V21***20
CSPH*6012AL*	0.99	1.03	59*N*1A100V21**22
CSPH*6012AL*	0.99	1.03	59*N*1A120V24**22
CSPH*6012AL*	0.99	1.03	58CV(A,X)070-12
CSPH*6012AL*	0.99	1.03	58CV(A,X)090-16
CSPH*6012AL*	0.99	1.03	58CV(A,X)110-20
CSPH*6012AL*	1.00	1.00	58CV(A,X)135-22
CSPH*6012AL*	1.00	1.00	58CV(A,X)155-22

2-STAGE (HI-Stage 5, Lo-Stage 2)					
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model
*FE4ANB006L	1.00	1.00	1.00	1.00	
FE4AN(B)F003L	0.96	0.99	0.98	1.08	
FE4AN(B)F005L	0.99	0.98	0.99	1.03	
FE4ANF002L	0.95	1.02	0.98	1.14	
FE5ANB004L	1.01	1.00	1.01	1.01	
FV4GN(B)F003L	0.96	0.99	0.98	1.06	
FV4GN(B)F005L	0.99	0.98	0.99	1.03	
FV4GNB006L	1.00	0.99	1.00	1.00	
FV4GNF002L	0.95	1.02	0.98	1.12	
CS9PH*3612AL *	0.97	1.03	0.97	1.07	58CTW045-12
CS9PH*4212AL *	0.96	1.03	0.98	1.07	58CTW045-12

24VNA937

See notes on page 48

42

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB ° F (° C)	EVAP. AIR EWB ° F (° C)	24VNA948 / FE4BNB06 Comfort + Dehumidify Mode Condenser Entering Air Temperature ° F (° C)																							
		105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)							
		ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW				
			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†		Total	Sens†		
75 (23.9)	72 (22.2)	1110	46.42	18.85	4.71	1184	49.80	20.23	4.17	1247	53.09	21.57	3.65	1330	56.46	22.96	3.19	1226	58.44	23.68	2.67				
	67 (19.4)		42.40	24.08	4.63		45.50	25.89	4.11		48.51	27.62	3.61		51.61	29.50	3.17		53.38	29.85	2.67				
	63 (17.2)		39.38	28.15	4.57		42.27	30.30	4.06		45.08	32.33	3.58		47.99	34.60	3.15		49.62	34.64	2.66				
	57 (13.9)		35.31	34.09	4.47		37.94	36.72	3.98		40.49	39.19	3.53		43.14	41.99	3.12		44.52	41.65	2.64				
	72 (22.2)		46.26	23.95	4.71		49.62	25.75	4.16		52.90	27.46	3.65		56.25	29.32	3.19		58.25	29.68	2.67				
80 (26.7)	67 (19.4)	1110	42.29	29.13	4.63	1184	45.38	31.35	4.10	1247	48.38	33.45	3.61	1330	51.47	35.79	3.17	1226	53.26	35.77	2.67				
	63 (17.2)		39.31	33.18	4.57		42.20	35.74	4.06		45.01	38.14	3.58		47.91	40.87	3.15		49.54	40.54	2.66				
	57 (13.9)		36.80	36.80	4.51		39.58	39.58	4.01		42.24	42.24	3.55		45.10	45.10	3.13		45.76	45.76	2.65				
	STAGE 3																								
	72 (22.2)		29.62	12.03	2.44		31.87	12.96	2.16		34.08	13.86	1.91		36.31	14.77	1.66		38.96	15.92	1.43				
75 (23.9)	67 (19.4)	744	26.97	15.41	2.44	801	29.06	16.68	2.16	842	31.09	17.85	1.92	887	33.14	19.06	1.68	1001	35.59	20.85	1.46				
	63 (17.2)		24.98	18.04	2.43		26.95	19.58	2.15		28.84	20.96	1.92		30.75	22.40	1.70		33.06	24.69	1.49				
	57 (13.9)		22.33	21.88	2.41		24.13	23.80	2.14		25.84	25.48	1.92		27.58	27.24	1.71		29.92	29.92	1.51				
	72 (22.2)		29.51	15.35	2.44		31.74	16.60	2.15		33.93	17.76	1.91		36.15	18.96	1.66		38.77	20.72	1.43				
	67 (19.4)		26.90	18.70	2.44		28.98	20.29	2.15		31.00	21.72	1.92		33.04	23.21	1.68		35.47	25.60	1.46				
80 (26.7)	63 (17.2)	744	34.45	25.97	4.20	801	26.90	23.17	2.15	842	28.79	24.81	1.92	887	30.70	26.53	1.70	1001	33.02	29.42	1.49				
	57 (13.9)		30.79	29.76	4.10		33.37	32.41	3.78		35.77	34.73	3.46		38.24	37.17	3.15		41.59	41.26	2.86				
	STAGE 1 - FE4BNB06 ONLY																								
	72 (22.2)		25.60	10.40	1.99		18.27	7.44	0.93		19.44	7.91	0.83		20.67	8.39	0.71		22.04	8.96	0.56				
	67 (19.4)		23.27	13.31	1.99		16.64	9.65	0.95		17.72	10.17	0.86		18.84	10.76	0.75		20.11	11.51	0.61				
75 (23.9)	63 (17.2)	662	21.53	15.58	1.99	500	15.45	11.39	0.97	500	16.45	11.96	0.88	508	17.49	12.62	0.77	534	18.68	13.53	0.65				
	57 (13.9)		19.26	18.92	1.98		13.90	13.90	0.98		14.76	14.58	0.90		15.69	15.35	0.81		16.77	16.48	0.70				
	72 (22.2)		25.60	10.40	1.99		18.26	7.44	0.93		19.44	7.91	0.83		20.67	8.39	0.71		22.04	8.96	0.56				
	67 (19.4)		23.27	13.31	1.99		16.64	9.65	0.95		17.72	10.17	0.86		18.84	10.76	0.75		20.11	11.51	0.61				
	63 (17.2)		21.53	15.58	1.99		15.45	11.39	0.97		16.45	11.96	0.88		17.49	12.62	0.77		18.68	13.53	0.65				
80 (26.7)	57 (13.9)	662	19.26	18.92	1.98	500	13.90	13.90	0.98	500	14.76	14.58	0.90	508	15.69	15.35	0.81	534	16.77	16.48	0.70				
	72 (22.2)		25.60	10.40	1.99		18.26	7.44	0.93		19.44	7.91	0.83		20.67	8.39	0.71		22.04	8.96	0.56				
	67 (19.4)		23.27	13.31	1.99		16.64	9.65	0.95		17.72	10.17	0.86		18.84	10.76	0.75		20.11	11.51	0.61				
	63 (17.2)		21.53	15.58	1.99		15.45	11.39	0.97		16.45	11.96	0.88		17.49	12.62	0.77		18.68	13.53	0.65				
	57 (13.9)		19.26	18.92	1.98		13.90	13.90	0.98		14.76	14.58	0.90		15.69	15.35	0.81		16.77	16.48	0.70				
STAGE 1 - ALL OTHER COILS																									
75 (23.9)	72 (22.2)	662	25.60	10.40	1.99	457	17.95	7.29	0.93	482	19.30	7.84	0.83	508	20.67	8.39	0.71	534	22.04	8.96	0.56				
	67 (19.4)		23.27	13.31	1.99		16.36	9.31	0.95		17.59	10.02	0.86		18.84	10.76	0.75		20.11	11.51	0.61				
	63 (17.2)		21.53	15.58	1.99		15.18	10.89	0.97		16.33	11.74	0.88		17.49	12.62	0.77		18.68	13.53	0.65				
	57 (13.9)		19.26	18.92	1.98		13.59	13.23	0.98		14.63	14.27	0.90		15.69	15.35	0.81		16.77	16.48	0.70				
	72 (22.2)		25.60	10.40	1.99		17.95	7.29	0.93		19.30	7.84	0.83		20.67	8.39	0.71		22.04	8.96	0.56				
80 (26.7)	67 (19.4)	662	23.27	13.31	1.99	457	16.36	9.31	0.95	482	17.59	10.02	0.86	508	18.84	10.76	0.75	534	20.11	11.51	0.61				
	63 (17.2)		21.53	15.58	1.99		15.18	10.89	0.97		16.33	11.74	0.88		17.49	12.62	0.77		18.68	13.53	0.65				
	57 (13.9)		19.26	18.92	1.98		13.59	13.23	0.98		14.63	14.27	0.90		15.69	15.35	0.81		16.77	16.48	0.70				
	72 (22.2)		25.60	10.40	1.99		17.95	7.29	0.93		19.30	7.84	0.83		20.67	8.39	0.71		22.04	8.96	0.56				
	67 (19.4)		23.27	13.31	1.99		16.36	9.31	0.95		17.59	10.02	0.86		18.84	10.76	0.75		20.11	11.51	0.61				
80 (26.7)	63 (17.2)	662	21.53	15.58	1.99	457	15.18	10.89	0.97	482	16.33	11.74	0.88	508	17.49	12.62	0.77	534	18.68	13.53	0.65				
	57 (13.9)		19.26	18.92	1.98		13.59	13.23	0.98		14.63	14.27	0.90		15.69	15.35	0.81		16.77	16.48	0.70				
	72 (22.2)		25.60	10.40	1.99		17.95	7.29	0.93		19.30	7.84	0.83		20.67	8.39	0.71		22.04	8.96	0.56				
	67 (19.4)		23.27	13.31	1.99		16.36	9.31	0.95		17.59	10.02	0.86		18.84	10.76	0.75		20.11	11.51	0.61				
	63 (17.2)		21.53	15.58	1.99		15.18	10.89	0.97		16.33	11.74	0.88		17.49	12.62	0.77		18.68	13.53	0.65				
80 (26.7)	57 (13.9)	662	19.26	18.92	1.98	457	13.59	13.23	0.98	482	14.63	14.27	0.90	508	15.69	15.35	0.81	534	16.77	16.48	0.70				
	72 (22.2)		25.60	10.40	1.99		17.95	7.29	0.93		19.30	7.84	0.83		20.67	8.39	0.71		22.04	8.96	0.56				
	67 (19.4)		23.27	13.31	1.99		16.36	9.31	0.95		17.59	10.02	0.86		18.84	10.76	0.75		20.11	11.51	0.61				
	63 (17.2)		21.53	15.58	1.99		15.18	10.89	0.97		16.33	11.74	0.88		17.49	12.62	0.77		18.68	13.53	0.65				
	57 (13.9)		19.26	18.92	1.98		13.59	13.23	0.98		14.63	14.27	0.90		15.69	15.35	0.81		16.77	16.48	0.70				

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 5 – Compressor speed limited to stage four at 65 outdoor. Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 48

24VNA948

See notes on page 48

44[illegible]

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB ° F (° C)	EVAP. AIR EWB ° F (° C)	24VNA949 / *CNPV*6024AL* + 58CV(A, X)155--22 Comfort + Dehumidity Mode Condenser Entering Air Temperature ° F (° C)																			
		105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW				
75 (23.9)	72 (22.2)	1110	46.69	19.03	4.05	1184	49.03	19.99	3.61	1196	50.82	20.67	3.20	1200	52.44	21.29	2.83	1236	54.18	21.99	2.52
	67 (19.4)		42.37	24.54	3.98		44.50	25.79	3.55		46.13	26.47	3.14		47.59	27.05	2.77		49.16	27.84	2.47
	63 (17.2)		39.20	28.86	3.94		41.17	30.33	3.51		42.67	31.00	3.10		44.02	31.54	2.74		45.47	32.41	2.44
	57 (13.9)		35.30	35.19	3.89		37.12	36.99	3.46		38.37	37.72	3.05		39.47	38.20	2.69		40.73	39.17	2.39
	72 (22.2)		46.59	24.56	4.05		48.93	25.81	3.61		50.72	26.49	3.20		52.34	27.07	2.83		54.08	27.87	2.52
80 (26.7)	67 (19.4)	1110	42.29	30.00	3.98	1184	44.41	31.53	3.55	1196	46.04	32.21	3.14	1200	47.51	32.74	2.77	1236	49.07	33.63	2.47
	63 (17.2)		39.24	34.32	3.94		41.22	36.08	3.51		42.71	36.75	3.10		44.03	37.24	2.74		45.49	38.20	2.44
	57 (13.9)		37.41	37.41	3.92		39.33	39.33	3.49		40.47	40.47	3.07		41.42	41.42	2.71		42.65	42.65	2.41
	72 (22.2)		30.83	12.50	2.33		32.85	13.32	2.05		34.76	14.09	1.82		36.68	14.86	1.61		39.12	15.87	1.43
	67 (19.4)		27.67	15.62	2.33		29.56	16.69	2.04		31.29	17.62	1.81		33.04	18.56	1.60		35.28	20.03	1.43
75 (23.9)	63 (17.2)	744	25.33	18.03	2.32	801	27.09	19.29	2.03	842	28.71	20.34	1.81	887	30.31	21.41	1.61	1001	32.39	23.23	1.44
	57 (13.9)		22.37	21.65	2.32		23.97	23.17	2.03		25.40	24.38	1.81		26.83	25.65	1.61		28.78	28.01	1.44
	72 (22.2)		30.77	15.75	2.33		32.78	16.79	2.05		34.69	17.72	1.82		36.60	18.67	1.61		39.04	20.14	1.43
	67 (19.4)		27.61	18.83	2.33		29.50	20.12	2.04		31.23	21.20	1.81		32.98	22.32	1.60		35.21	24.23	1.43
	63 (17.2)		25.33	21.25	2.32		27.10	22.73	2.03		28.71	23.93	1.81		30.32	25.17	1.61		32.41	27.44	1.43
80 (26.7)	57 (13.9)	744	23.54	23.54	2.32	801	25.21	25.21	2.03	842	26.63	26.63	1.81	887	28.08	28.08	1.61	1001	30.35	30.35	1.44
	72 (22.2)		23.83	9.66	1.63		17.67	7.17	1.02		19.19	7.80	0.93		20.76	8.45	0.80		22.37	9.11	0.61
	67 (19.4)		21.23	12.07	1.64		15.73	8.59	1.01		17.11	9.31	0.93		18.52	10.05	0.81		19.97	10.81	0.63
	63 (17.2)		19.35	13.95	1.64		14.34	9.71	1.00		15.61	10.49	0.93		16.90	11.30	0.82		18.23	12.13	0.66
	57 (13.9)		17.03	16.78	1.63		12.49	11.34	0.99		13.61	12.23	0.94		14.76	13.14	0.84		15.94	14.09	0.69
75 (23.9)	72 (22.2)	662	23.77	12.23	1.63	457	17.63	8.73	1.02	482	19.16	9.45	0.93	508	20.73	10.20	0.80	535	22.33	10.97	0.61
	67 (19.4)		21.18	14.61	1.64		15.71	10.14	1.01		17.08	10.95	0.93		18.49	11.79	0.81		19.94	12.65	0.63
	63 (17.2)		19.36	16.50	1.64		14.33	11.25	1.00		15.59	12.13	0.93		16.89	13.04	0.82		18.22	13.97	0.66
	57 (13.9)		18.08	18.08	1.63		12.74	12.74	0.99		13.79	13.79	0.94		14.88	14.88	0.83		16.03	15.95	0.69
	72 (22.2)		23.83	9.66	1.63		17.67	7.17	1.02		19.19	7.80	0.93		20.76	8.45	0.80		22.37	9.11	0.61
80 (26.7)	67 (19.4)	662	21.23	12.07	1.64	457	15.73	8.59	1.01	482	17.11	9.31	0.93	508	18.52	10.05	0.81	535	19.97	10.81	0.63
	63 (17.2)		19.35	13.95	1.64		14.34	9.71	1.00		15.61	10.49	0.93		16.90	11.30	0.82		18.23	12.13	0.66
	57 (13.9)		17.03	16.78	1.63		12.49	11.34	0.99		13.61	12.23	0.94		14.76	13.14	0.84		15.94	14.09	0.69
	72 (22.2)		23.77	12.23	1.63		17.63	8.73	1.02		19.16	9.45	0.93		20.73	10.20	0.80		22.33	10.97	0.61
	67 (19.4)		21.18	14.61	1.64		15.71	10.14	1.01		17.08	10.95	0.93		18.49	11.79	0.81		19.94	12.65	0.63
75 (23.9)	63 (17.2)	662	19.36	16.50	1.64	457	14.33	11.25	1.00	482	15.59	12.13	0.93	508	16.89	13.04	0.82	535	18.22	13.97	0.66
	57 (13.9)		18.08	18.08	1.63		12.74	12.74	0.99		13.79	13.79	0.94		14.88	14.88	0.83		16.03	15.95	0.69
	72 (22.2)		23.83	9.66	1.63		17.67	7.17	1.02		19.19	7.80	0.93		20.76	8.45	0.80		22.37	9.11	0.61
	67 (19.4)		21.23	12.07	1.64		15.73	8.59	1.01		17.11	9.31	0.93		18.52	10.05	0.81		19.97	10.81	0.63
	63 (17.2)		19.35	13.95	1.64		14.34	9.71	1.00		15.61	10.49	0.93		16.90	11.30	0.82		18.23	12.13	0.66
80 (26.7)	57 (13.9)	662	17.03	16.78	1.63	457	12.49	11.34	0.99	482	13.61	12.23	0.94	508	14.76	13.14	0.84	535	15.94	14.09	0.69
	72 (22.2)		23.77	12.23	1.63		17.63	8.73	1.02		19.16	9.45	0.93		20.73	10.20	0.80		22.33	10.97	0.61
	67 (19.4)		21.18	14.61	1.64		15.71	10.14	1.01		17.08	10.95	0.93		18.49	11.79	0.81		19.94	12.65	0.63
	63 (17.2)		19.36	16.50	1.64		14.33	11.25	1.00		15.59	12.13	0.93		16.89	13.04	0.82		18.22	13.97	0.66
	57 (13.9)		18.08	18.08	1.63		12.74	12.74	0.99		13.79	13.79	0.94		14.88	14.88	0.83		16.03	15.95	0.69

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 48

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

24VNA949

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*CNPV*6024AL*	1.00	1.00	58CV(A.X)155-22
FE4AN(B.F)005L	0.99	0.99	
FE4ANB006L	1.00	1.00	
CAP**4821AL*	0.97	1.03	59MN7A060V21**20
CAP**4824AL*	0.98	1.00	59N*A080V21**20
CAP**4824AL*	0.98	1.00	59N*A100V21**22
CAP**4824AL*	0.98	1.00	59N*A120V24**22
CAP**4824AL*	0.98	1.00	58CV(A.X)110-20
CAP**4824AL*	0.98	1.00	58CV(A.X)135-22
CAP**4824AL*	0.98	1.00	58CV(A.X)155-22
CAP**6021AL*	1.00	1.00	58CV(A.X)090-16
CAP**6021AL*	0.99	1.06	59MN7A060V21**20
CAP**6024AL*	1.00	1.00	59N*A080V21**20
CAP**6024AL*	1.00	1.00	59N*A100V21**22
CAP**6024AL*	1.00	1.00	59N*A120V24**22
CAP**6024AL*	1.00	1.00	58CV(A.X)110-20
CAP**6024AL*	1.00	1.00	58CV(A.X)135-22
CAP**6024AL*	1.00	1.00	58CV(A.X)155-22
CNPV*4821AL*	0.98	1.00	58CV(A.X)090-16
CNPV*4821AL*	0.98	1.04	59MN7A060V21**20
CNPV*6024AL*	0.99	0.99	59N*A080V21**20
CNPV*6024AL*	1.00	1.00	59N*A100V21**22
CNPV*6024AL*	1.00	1.00	59N*A120V24**22
CNPV*6024AL*	1.00	1.00	58CV(A.X)110-20
CNPV*6024AL*	1.01	0.97	58CV(A.X)135-22
CNPV*6124AL*	1.01	0.97	58CV(A.X)155-22

2-STAGE (Hi-Stage 5, Lo-Stage 2)										
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model					
*CNPV*6024AL*	1.00	1.00	1.00	1.00	58CV(A.X)155-22					
FE4AN(B.F)005L	0.99	0.99	1.00	1.02						
FE4ANB006L	1.01	0.99	1.01	0.99						
FV4CN(B.F)005L	1.00	0.99	1.00	1.02						
FV4CNB006L	1.01	0.99	1.01	0.99						
CAP**4821AL*	0.97	0.99	0.98	1.05	58PH*090-16					
CAP**6021AL*	1.00	1.03	1.00	1.04	58PH*090-16					
CNPV*4821AL*	0.98	1.02	0.99	1.05	58PH*090-16					
CNPV*4821AL*	0.98	1.01	0.99	1.05	58PH*090-16					
CSPH*4812AL*	0.98	1.00	0.99	1.05	58PH*090-16					
CSPH*6012AL*	1.00	1.03	1.01	1.04	58PH*090-16					
CAP**4821AL*	0.97	0.99	0.98	1.04	58PH*110-20					
CAP**6021AL*	1.00	0.98	1.00	1.04	58PH*110-20					
CNPV*4821AL*	0.98	1.00	0.99	1.04	58PH*110-20					
CNPV*4821AL*	0.98	1.00	0.98	1.03	58PH*110-20					
CSPH*4812AL*	0.99	1.01	0.99	1.04	58PH*110-20					
CSPH*6012AL*	1.00	0.98	1.01	1.04	58PH*110-20					
CAP**4821AL*	0.97	0.99	0.98	1.03	58CTW090-16					
CAP**6021AL*	1.00	1.03	1.00	1.03	58CTW090-16					
CNPV*4821AL*	0.98	1.00	0.98	1.02	58CTW090-16					
CNPV*4821AL*	0.98	1.00	0.99	1.02	58CTW110-22					
CSPH*4812AL*	0.99	1.01	0.99	1.02	58CTW110-22					
CSPH*6012AL*	1.01	0.99	1.01	1.02	58CTW110-22					
CAP**4824AL*	0.98	1.00	0.98	1.02	58CTW135-22					
CAP**6024AL*	1.00	0.98	0.99	1.01	58CTW135-22					
CNPV*6024AL*	1.00	1.00	1.00	1.01	58CTW135-22					
CNPV*6124AL*	1.00	1.00	1.00	1.02	58CTW135-22					
CNPV*4824AL*	0.98	1.00	0.98	1.01	58CTW135-22					
CNPV*6024AL*	1.00	0.99	1.00	1.01	58CTW135-22					
CNPV*6124AL*	1.01	0.99	1.02	1.01	58CTW135-22					
CSPH*4812AL*	0.99	1.01	0.99	1.02	58CTW135-22					
CSPH*6012AL*	1.00	0.98	1.01	1.02	58CTW135-22					
CAP**4817AL*	0.98	1.00	0.98	1.05	59P2A080E17**16					
CSPH*6012AL*	1.00	1.03	1.00	1.05	59P2A080E17**16					
CAP**4821AL*	0.98	1.00	0.98	1.03	59P2A080E21**20					
CNPV*4821AL*	0.98	1.00	0.98	1.02	59P2A080E21**20					
CNPV*4821AL*	0.98	1.00	0.98	1.02	59P2A080E21**20					
CSPH*4812AL*	0.99	1.01	0.99	1.03	59P2A080E21**20					
CSPH*6012AL*	1.01	1.00	1.00	1.01	59P2A080E21**20					
CAP**4821AL*	0.98	1.00	0.98	1.03	59P2A100E21**20					
CAP**6021AL*	1.00	1.03	0.99	1.02	59P2A100E21**20					
CNPV*4821AL*	0.98	1.00	0.98	1.02	59P2A100E21**20					
CNPV*4821AL*	0.98	1.00	0.98	1.02	59P2A100E21**20					
CSPH*4812AL*	0.99	1.01	0.99	1.03	59P2A100E21**20					
CNPV*4821AL*	0.98	1.00	0.98	1.02	59P2A100E21**20					
CNPV*4821AL*	0.98	1.00	0.98	1.02	59P2A100E21**20					
CAP**4824AL*	1.00	1.03	0.99	1.02	59P2A120E24**20					
CAP**6024AL*	1.00	1.03	0.99	1.02	59P2A120E24**20					
CNPV*6024AL*	1.00	1.00	0.98	1.02	59P2A120E24**20					
CNPV*6124AL*	1.01	1.00	1.01	1.02	59P2A120E24**20					
CNPV*6124AL*	1.01	1.00	1.01	1.02	59P2A120E24**20					

2-STAGE (Hi-Stage 5, Lo-Stage 2)												
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model							
CSPH*4812AL*	0.99	1.01	0.99	1.03	59P2A120E24**20							
CSPH*6012AL*	1.01	1.04	1.00	1.02	59P2A120E24**20							
CAP**4821AL*	0.97	0.99	0.96	1.01	59P5A080E21**20							
CAP**4821AL*	0.97	0.99	0.99	1.10	59P5A100E21**20							
CSPH*4812AL*	0.98	1.00	1.00	1.10	59P5A100E21**20							
CAP**4821AL*	0.97	0.99	0.98	1.07	59P6A080E21**20							
CAP**6021AL*	0.99	1.01	1.00	1.07	59P6A080E21**20							
CNPV*4821AL*	0.98	1.01	0.99	1.07	59P6A080E21**20							
CNPV*4821AL*	0.98	1.00	0.99	1.07	59P6A080E21**20							
CSPH*4812AL*	0.98	1.00	0.99	1.07	59P6A080E21**20							
CSPH*6012AL*	1.00	1.03	1.01	1.07	59P6A080E21**20							
CAP**4821AL*	0.97	0.99	0.98	1.06	59P6A100E21**20							
CAP**6021AL*	0.99	1.01	1.00	1.06	59P6A100E21**20							
CNPV*4821AL*	0.98	1.00	0.99	1.06	59P6A100E21**20							
CNPV*4821AL*	0.98	1.00	1.00	1.09	59P6A100E21**20							
CSPH*4812AL*	1.00	1.03	1.01	1.06	59P6A100E21**20							
CSPH*6012AL*	0.97	0.99	0.98	1.05	59P6A120E24**22							
CAP**4824AL*	0.99	1.01	1.01	1.06	59P6A120E24**22							
CNPV*6024AL*	0.99	1.01	1.01	1.06	59P6A120E24**22							
CNPV*6124AL*	1.01	1.04	1.02	1.05	59P6A120E24**22							
CNPV*6124AL*	1.01	1.04	1.02	1.05	59P6A120E24**22							
CSPH*4812AL*	0.98	1.00	1.00	1.11	59P6A120E24**22							
CSPH*6012AL*	1.00	1.03	1.01	1.06	59P6A120E24**22							

See notes on page 48

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB ° F (° C)	EVAP. AIR EWB ° F (° C)	24VNA360 / FE4ENB061 Comfort + Dehumidify Mode Condenser Entering Air Temperature ° F (° C)																									
		105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)									
		Capacity MBtuh		ID SCFM	Total Sys. KW	Capacity MBtuh		ID SCFM	Total Sys. KW	Capacity MBtuh		ID SCFM	Total Sys. KW	Capacity MBtuh		ID SCFM	Total Sys. KW	Capacity MBtuh		ID SCFM	Total Sys. KW						
		Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†				
STAGE 5																											
75 (23.9)	72 (22.2)	57.74	23.45	1367	6.51	61.60	25.02	1440	5.73	65.43	26.57	1514	5.06	69.11	28.06	1488	4.43	71.73	29.06	1488	3.80						
	67 (19.4)	52.75	29.96		6.32	56.26	31.94		5.56	59.74	33.92		4.89	63.08	35.74		4.28	65.39	36.48		3.66						
	63 (17.2)	49.06	35.05		6.19	52.31	37.35		5.43	55.53	39.67		4.77	58.62	41.74		4.17	60.75	42.26		3.56						
	57 (13.9)	44.14	42.48		6.02	47.05	45.25		5.27	49.93	48.04		4.62	52.69	50.49		4.02	54.52	50.74		3.43						
	72 (22.2)	57.61	29.82		6.52	61.47	31.80		5.74	65.28	33.78		5.06	68.97	35.61		4.43	71.59	36.37		3.80						
80 (26.7)	67 (19.4)	52.65	36.25	1367	6.32	56.15	38.64	1440	5.56	59.62	41.04	1514	4.89	62.96	43.19	1488	4.28	65.29	43.67	1488	3.66						
	63 (17.2)	48.99	41.31		6.19	52.23	44.02		5.43	55.45	46.75		4.77	58.54	49.15		4.17	60.67	49.42		3.56						
	57 (13.9)	45.90	45.90		6.08	48.92	48.92		5.33	51.93	51.93		4.67	54.72	54.72		4.07	55.91	55.91		3.46						
	STAGE 3																										
	72 (22.2)	36.98	15.01		3.25	39.25	15.94		2.79	41.77	16.95		2.44	44.28	17.97		2.13	47.05	19.11		1.87						
75 (23.9)	67 (19.4)	33.40	19.03	959	3.22	35.55	20.23	1013	2.75	37.83	21.50	1066	2.39	40.10	22.76	1210	2.09	42.62	24.30	1210	1.84						
	63 (17.2)	30.77	22.16		3.21	32.82	23.59		2.72	34.94	25.04		2.37	37.04	26.50		2.06	39.38	28.36		1.81						
	57 (13.9)	27.31	26.75		3.18	29.19	28.48		2.69	31.09	30.22		2.34	32.99	31.96		2.04	35.10	34.26		1.79						
	72 (22.2)	36.89	19.10		3.25	39.15	20.27		2.79	41.66	21.53		2.44	44.17	22.80		2.13	46.93	24.34		1.87						
	67 (19.4)	33.32	23.06		3.22	35.47	24.51		2.75	37.74	26.01		2.39	40.02	27.53		2.09	42.53	29.47		1.84						
80 (26.7)	63 (17.2)	30.72	26.18	959	3.21	32.77	27.85	1013	2.72	34.89	29.54	1066	2.37	36.99	31.25	1210	2.06	39.33	33.50	1210	1.81						
	57 (13.9)	28.74	28.74		3.19	30.65	30.65		2.70	32.58	32.58		2.35	34.53	34.53		2.05	36.85	36.85		1.80						
	STAGE 1																										
	72 (22.2)	27.11	11.00		2.21	19.91	8.07		1.22	20.99	8.50		1.01	22.49	9.11		0.80	24.02	9.73		0.59						
	67 (19.4)	24.28	13.80		2.21	17.69	10.04		1.21	18.67	10.45		1.01	20.04	11.19		0.81	21.43	11.97		0.61						
75 (23.9)	63 (17.2)	22.21	15.99	748	2.20	16.05	11.57	600	1.21	16.97	11.96	600	1.01	18.23	12.81	700	0.82	19.53	13.71	700	0.62						
	57 (13.9)	19.51	19.20		2.20	13.98	13.85		1.20	14.76	14.19		1.02	15.88	15.20		0.84	17.03	16.27		0.65						
	72 (22.2)	27.04	13.93		2.21	19.86	10.20		1.22	20.94	10.61		1.01	22.43	11.35		0.80	23.96	12.13		0.59						
	67 (19.4)	24.22	16.71		2.21	17.65	12.16		1.21	18.63	12.54		1.01	19.99	13.42		0.81	21.39	14.35		0.61						
	63 (17.2)	22.18	18.88		2.20	16.04	13.68		1.21	16.95	14.04		1.01	18.21	15.03		0.82	19.50	16.08		0.62						
80 (26.7)	57 (13.9)	20.65	20.65	748	2.20	14.90	14.90	600	1.20	15.50	15.50	600	1.02	16.63	16.63	700	0.83	17.82	17.82	700	0.64						
	72 (22.2)	27.11	11.00		2.21	19.91	8.07		1.22	20.99	8.50		1.01	22.49	9.11		0.80	24.02	9.73		0.59						
	67 (19.4)	24.28	13.80		2.21	17.69	10.04		1.21	18.67	10.45		1.01	20.04	11.19		0.81	21.43	11.97		0.61						
	63 (17.2)	22.21	15.99		2.20	16.05	11.57		1.21	16.97	11.96		1.01	18.23	12.81		0.82	19.53	13.71		0.62						
	57 (13.9)	19.51	19.20		2.20	13.98	13.85		1.20	14.76	14.19		1.02	15.88	15.20		0.84	17.03	16.27		0.65						

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 5 – Compressor speed limited to stage four at 65 outdoor. **Stage 1** – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 48

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

24VNA360

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*FEANB006L	1.00	1.00	58CV(A.X)110-20
CAP**6021AL*	0.99	0.99	58CV(A.X)110-20
CAP**6024AL*	0.99	0.99	58CV(A.X)110-20
CNPH*6024AL*	0.99	1.04	58CV(A.X)110-20
CNPH*6124AL*	0.99	1.04	58CV(A.X)110-20
CNPV*6024AL*	0.98	0.98	58CV(A.X)110-20
CNPH*6124AL*	1.00	1.00	58CV(A.X)110-20
CSPH*6012AL*	1.00	1.00	58CV(A.X)110-20
CAP**6024AL*	0.99	0.99	58CV(A.X)135-22
CNPH*6024AL*	0.99	0.99	58CV(A.X)135-22
CNPH*6124AL*	1.00	1.00	58CV(A.X)135-22
CNPV*6024AL*	0.98	0.98	58CV(A.X)135-22
CNPH*6124AL*	1.00	1.00	58CV(A.X)135-22
CSPH*6012AL*	1.00	1.00	58CV(A.X)155-22
CAP**6024AL*	1.00	1.00	58CV(A.X)155-22
CNPH*6024AL*	1.00	1.00	58CV(A.X)155-22
CNPH*6124AL*	1.00	1.00	58CV(A.X)155-22
CNPV*6024AL*	0.99	0.99	58CV(A.X)155-22
CNPH*6012AL*	1.00	1.00	58CV(A.X)155-22
CAP**6021AL*	0.99	1.04	59N*A080V21**20
CAP**6024AL*	0.99	1.04	59N*A080V21**20
CNPH*6024AL*	0.99	1.04	59N*A080V21**20
CNPH*6124AL*	0.99	1.04	59N*A080V21**20
CNPV*6024AL*	0.98	1.03	59N*A080V21**20
CNPH*6124AL*	0.99	1.04	59N*A080V21**20
CSPH*6012AL*	0.99	1.04	59N*A100V21**22
CAP**6021AL*	0.99	1.04	59N*A100V21**22
CNPH*6024AL*	0.99	1.04	59N*A100V21**22
CNPH*6124AL*	0.98	0.98	59N*A100V21**22
CNPV*6124AL*	1.00	1.00	59N*A100V21**22
CSPH*6012AL*	1.00	1.00	59N*A100V21**22
CAP**6024AL*	0.99	1.04	59N*A120V24**22
CNPH*6024AL*	0.99	1.04	59N*A120V24**22
CNPH*6124AL*	0.99	1.04	59N*A120V24**22
CNPV*6124AL*	0.99	1.03	59N*A120V24**22
CNPH*6124AL*	0.99	0.99	59N*A120V24**22
CSPH*6012AL*	1.00	1.00	59N*A120V24**22
CAP**6021AL*	0.98	1.03	59MN7A060V21**20
CAP**6024AL*	0.98	1.03	59MN7A060V21**20
CNPH*6024AL*	0.98	1.09	59MN7A060V21**20
CNPH*6124AL*	0.98	1.09	59MN7A060V21**20
CNPV*6024AL*	0.97	1.02	59MN7A060V21**20
CNPH*6124AL*	0.99	1.04	59MN7A060V21**20
CSPH*6012AL*	0.99	1.04	59MN7A060V21**20

2-STAGE (HI-Stage 5, Lo-Stage 2)					Furnace Model
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	
*FV4CNB006L	1.00	1.00	1.00	1.00	58PH*110-20
CAP**6021AL*	1.01	1.08	1.01	1.07	58PH*110-20
CSPH*6012AL*	1.02	1.07	1.00	1.04	58PH*110-20
CAP**6024AL*	1.01	1.06	1.00	1.11	58PH*135-20
CNPH*6024AL*	1.01	1.08	1.01	1.06	58PH*135-20
CNPH*6124AL*	1.01	1.06	1.01	1.12	58PH*135-20
CNPV*6024AL*	1.00	1.05	1.01	1.06	58PH*135-20
CNPH*6124AL*	1.02	1.07	1.00	1.03	58PH*135-20
CSPH*6012AL*	1.02	1.07	1.01	1.05	58PH*135-20
CAP**6021AL*	1.01	1.06	1.01	1.07	58CTW110-22
CSPH*6012AL*	1.02	1.07	1.00	1.04	58CTW110-22
CAP**6024AL*	1.01	1.08	1.01	1.06	58CTW135-22
CNPH*6024AL*	1.01	1.06	1.01	1.06	58CTW135-22
CNPH*6124AL*	1.01	1.06	1.01	1.06	58CTW135-22
CNPV*6024AL*	1.00	1.05	1.01	1.06	58CTW135-22
CNPH*6124AL*	1.02	1.07	1.01	1.04	58CTW135-22
CAP**6021AL*	1.01	1.06	1.01	1.07	59P2A080E21**20
CSPH*6012AL*	1.02	1.07	1.00	1.05	59P2A080E21**20
CAP**6024AL*	1.01	1.06	1.01	1.07	59P2A100E21**20
CSPH*6012AL*	1.01	1.06	1.00	1.05	59P2A100E21**20
CAP**6024AL*	1.01	1.08	1.01	1.07	59P2A120E24**20
CNPH*6024AL*	1.01	1.06	1.01	1.07	59P2A120E24**20
CNPH*6124AL*	1.01	1.06	1.01	1.07	59P2A120E24**20
CNPV*6024AL*	1.00	1.05	1.01	1.07	59P2A120E24**20
CSPH*6012AL*	1.02	1.07	1.00	1.04	59P2A120E24**20
CAP**6021AL*	0.99	1.04	1.01	1.11	59P2A080E21**20
CSPH*6012AL*	1.00	1.05	1.01	1.10	59P2A080E21**20
CAP**6024AL*	1.00	1.05	1.01	1.11	59P2A120E24**22
CNPH*6024AL*	1.00	1.05	1.01	1.11	59P2A120E24**22
CNPH*6124AL*	1.00	1.05	1.01	1.10	59P2A120E24**22
CNPV*6124AL*	0.99	1.04	1.01	1.11	59P2A120E24**22
CSPH*6012AL*	1.00	1.05	1.00	1.09	59P2A120E24**22
CSPH*6012AL*	1.00	1.05	1.01	1.09	59P2A120E24**22
CAP**6024AL*	0.99	1.04	1.01	1.11	59P2A120E24**22
CNPH*6124AL*	1.00	1.05	1.01	1.10	59P2A120E24**22
CNPV*6024AL*	0.98	1.03	1.01	1.10	59P2A120E24**22
CNPH*6124AL*	1.00	1.05	1.01	1.09	59P2A120E24**22
CSPH*6012AL*	1.00	1.05	1.00	1.08	59P2A120E24**22
CAP**6024AL*	0.99	1.04	1.01	1.09	OVLAAB060154
CNPH*6124AL*	1.01	1.08	1.01	1.07	OVLAAB060154
CNPV*6124AL*	1.01	1.06	1.01	1.11	OVMAAB060154
CSPH*6012AL*	1.01	1.06	1.00	1.11	OVMAAB060154

NOTES:

- * Tested combination.
- † Total and sensible capacities are net capacities. Blower motor heat has been subtracted.
- ‡ Sensible capacities are shown for both 80°F (27°C) and 75°F (23.4°C) entering air at the indoor coil.
- § For sensible capacities at other than these, deduct 835 Btu/h (245 kW) per 1000 CFM (480 L/S) of indoor coil air for each degree below reference temperature, or add 835 Btu/h (245 kW) per 1000 CFM (480 L/S) of indoor coil air for each degree above reference temperature.
- # Detailed cooling capacities are based on indoor and outdoor unit at the same elevation per AHRI standard 210/240-2008. If additional tubing length and/or indoor unit is located above outdoor unit, a slight variation in capacity may occur.
- ** System kw is total of indoor and outdoor unit kilowatts.
- NOTE: When the required data falls between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.
- EWB — Entering Wet Bulb

GUIDE SPECIFICATIONS

GENERAL

System Description

Outdoor-mounted, air-cooled, split-system air conditioning unit suitable for ground or rooftop installation. Unit consists of a hermetic compressor, an air-cooled coil, forward-swept blade propeller-type condenser fan, and a control box. Unit will discharge supply air upward as shown on contract drawings. Unit will be used in a refrigeration circuit to match up to a packaged fan coil or coil unit.

Quality Assurance

- Unit will be rated in accordance with the latest edition of AHRI Standard 240.
- Unit will be certified for capacity and efficiency, and listed in the latest AHRI directory.
- Unit construction will comply with latest edition of ASHRAE and with NEC.
- Unit will be constructed in accordance with UL standards and will carry the UL label of approval. Unit will have C-UL approval.
- Unit cabinet will be capable of withstanding Federal Test Method Standard No. 141 (Method 6061) 500-hr salt spray test.
- Air-cooled condenser coils are pressure tested and the outdoor units are leak tested.
- Unit constructed in ISO9001 approved facility.

Delivery, Storage, and Handling

- Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

Warranty (for inclusion by specifying engineer)

- U.S. and Canada only.

PRODUCTS

Equipment

- Factory-assembled, single-piece, air-cooled air conditioning unit. Contained within the unit enclosure is all factory wiring, piping, controls, compressor, refrigerant charge Puron® (R-410A) refrigerant, and special features required prior to field start-up.

Unit Cabinet

- Unit cabinet will be constructed of galvanized steel, bonderized, and coated with a powder coat paint.

Fans

- Condenser fan will be direct-drive propeller type, forward swept blade, discharging air upward.

AIR-COOLED, SPLIT-SYSTEM AIR CONDITIONER 24VNA9

- Condenser fan motors will be totally enclosed, 1-phase type with class B insulation and permanently lubricated.
- Shafts will be corrosion resistant.
- Fan blades will be statically and dynamically balanced.
- Condenser fan openings will be equipped with coated steel wire safety guards.

Compressor

- Compressor will be hermetically sealed.
- Compressor will be mounted on rubber vibration isolators.
- Compressor will be covered with a sound absorbing blanket.

Condenser Coil

- Condenser coil will be air cooled.
- Coil will be constructed of aluminum fins mechanically bonded to copper tubes which are then cleaned, dehydrated, and sealed.

Refrigeration Components

- Refrigeration circuit components will include liquid-line front-seating shutoff valve with sweat connections, vapor-line front-seating shutoff valve with sweat connections, system charge of Puron® (R-410A) refrigerant, POE compressor oil, accumulator, charge compensator, electronic expansion valve, and reversing valve.
- Unit will be equipped with high-pressure switch, suction pressure transducer, and filter drier for Puron® refrigerant.

Operating Characteristics

- The capacity of the unit will meet or exceed _____ Btuh at a suction temperature of _____ °F (°C). The power consumption at full load will not exceed _____ kW.
- Combination of the unit and the evaporator or fan coil unit will have a total net cooling capacity of _____ Btuh or greater at conditions of _____ CFM entering air temperature at the evaporator at _____ °F (°C) wet bulb and _____ °F (°C) dry bulb, and air entering the unit at _____ °F (°C).
- The system will have a SEER of _____ Btuh/watt or greater at DOE conditions.

Electrical Requirements

- Nominal unit electrical characteristics will be _____ v, single phase, 60 hz. The unit will be capable of satisfactory operation within voltage limits of _____ v to _____ v.
- Unit electrical power will be single point connection.
- Control circuit will be 24v.
- Compliant with IEC 61000-4-5 Transient Surge Requirement.

Special Features

- Refer to section of this literature identifying accessories and descriptions for specific features and available enhancements.
- Infinity control with appropriate software version is required for full featured operation.

SYSTEM DESIGN SUMMARY

1. Intended for outdoor installation with free air inlet and outlet. Outdoor fan external static pressure available is less than 0.01-in. wc.
2. This product is not qualified for low ambient cooling operation.
Minimum cooling outdoor operating temperatures:
 - Communicating systems: 40°F (4.44°C)
 - Non-communicating systems: 55°F (12.8°C)
3. For reliable operation, unit should be level in all horizontal planes.
4. This unit is qualified for up to 100 ft (30.5 m) equivalent length of line set without additional accessories.
5. If any refrigerant tubing is buried, provide a 6 in. (152.4 mm) vertical rise to the valve connections at the unit. Refrigerant tubing lengths up to 36 in. (914.4 mm) may be buried without further consideration. Do not bury refrigerant lines longer than 36 in. (914.4 mm).
6. Use only copper wire for electric connection at unit. Aluminum and clad aluminum are not acceptable for the type of connector provided.
7. Do not apply capillary tube indoor coils to these units.
8. Puron refrigerant TXV required on indoor coil.