



DESCRIPTION

- Various finishes identified by suffix
- Magnetix™ technology features an innovative magnetic docking system
- Includes handshower, hose and magnetic docking system
- 72" double interlock spiral metal hose
(for 220H5 series and 220H5EP series)
- Assembled with 2 check valves for backflow prevention

OPERATION

- Adjust lever to select desired spray function

FLOW

- Flowrate for non-EP models are limited to 2.5 gpm (9.5 L/min) max
- Flowrate for EP suffix models are limited to 1.75 gpm (6.6 L/min) max

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year limited warranty when used in a commercial installation
- 10 year limited warranty when used in a multifamily installation
- Visit www.moen.com/support for complete details and limitations


SPECIFICATIONS



Verso™

Verso™ Handshower with Magnetix™ Docking

MODELS: 220H5 series
220H5EP series

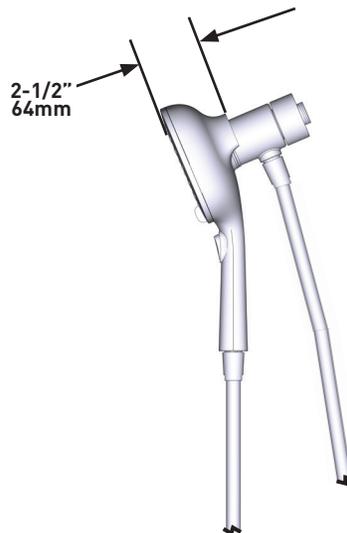

CRITICAL DIMENSIONS DO NOT SCALE