

## SPECIFICATIONS

### DESCRIPTION

- Brass swivel ball assembly (for 220R7 and 220R7EP series)
- 1/2" NPT connection (for 220R7 series and 220R7EP series)
- 1/2" IPS connection (for 220R6EP series)

### OPERATION

- Infiniti™ dial allows users to precisely adjust to their preferred balance of force and coverage

### FLOW

- Flowrate for non-EP models are limited to 2.5 gpm (9.5 L/min) max
- Flowrate for EP suffix models are limited to 1.75 gpm (6.6 L/min) max
- EP suffix models are limited to 1.75 gpm (6.6 L/min) MAX at 80 psi

### STANDARDS

- Third party certified to meet: ASME A112.18/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- EP suffix models are compliant with California water efficiency regulations

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year limited warranty when used in a commercial installation
- 10 year limited warranty when used in a multifamily installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations





### Verso™

Rainshower with Infiniti™ dial

### MODELS:

220R6EP series,  
220R7EP series, 220R7 series

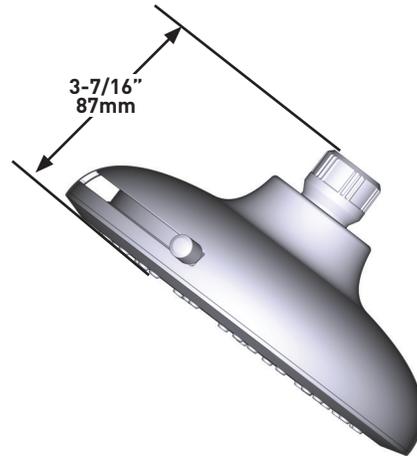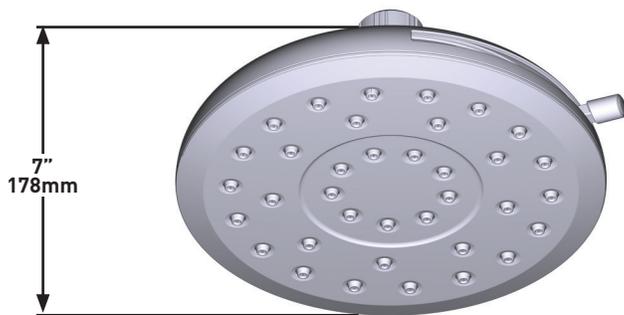

## CRITICAL DIMENSIONS DO NOT SCALE