

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

Solid brass fitting attaches to the end of the PEX tubing and allows for easy installation onto the bottom of the manifold.

Technical Data

Material..... Brass
 Max Working Pressure 100 psi (6.9 bar)
 Tested Pressure..... 145 psi @ 180°F (10 bar @ 82.2°C)
 Operating Temperature..... 160°F (70°C)
 Maximum Temperature..... 230°F (110°C)
 Minimum Temperature..... 32°F (0°C)


Pair Qty	PEX Size	Stk. #	Dimension		Weight
			A	B	
	1/2"	77105	1-5/16" (33 mm)	1/16" (18 mm)	0.33 lb 0.15 kg
	5/8"	77119	1-5/16" (33 mm)	1/16" (18 mm)	0.33 lb 0.15 kg
	3/4"	77122	1-7/16" (36 mm)	15/16" (23 mm)	0.44 lb 0.20 kg

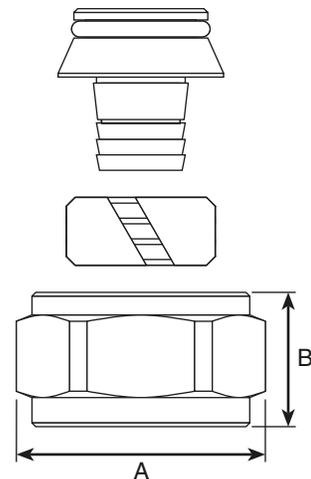

Port Caps for Stainless Steel Manifolds

Caps off unused ports on the Stainless Steel Manifold. Includes fiber gasket.

Pair Qty	Stk. #	Weight
	77100	0.15 lb 0.07 kg

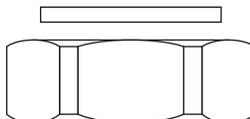

Installation

Installation of stainless steel manifolds must follow all of HeatLink's instructions and guidelines, including those in the Assembly Instructions.

Related Documents

- 1-1/4" Stainless Steel Manifold Assembly Instructions (L676100)
- HeatLink Limited Heating Warranty

This page is intentionally blank.