2-1/2" ANGLE HOSE VALVE

MT NATIONAL FIRE PRODUCTS

Figure 1201



INSTALLATION

JIST.

Ful

Use an approved thread sealant on the threads the hose valve will be installed on. DO NOT OVERTIGHTEN. Overtightening may cause cracks or deformities in the valve body which could lead to failure.

NFP120101A

FEATURES & BENEFITS

- Sizes:
 - 2-1/2 FNPT x MNST
 - 2-1/2 Grooved x MNST
- UL/FM approved
- Body Material: Brass
- Finish: Rough brass
- Hand Wheel: Ductile iron (red)
- Max Pressure: 300 psi




*Not for use in potable systems

2-1/2" ANGLE HOSE VALVE



Figure 1201

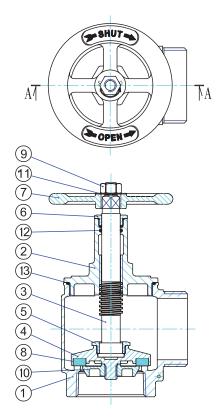

MATERIAL CHART

NO.	PART NAME	MATERIAL				
1	Body	Brass ASTM B584				
2	Bonnet	Brass ASTM B584				
3	Stem	Brass				
4	Disc Holder	Forged Brass				
5	Disc Nut	Brass				
6	Packing Nut	Brass				
7	Hand Wheel	Ductile Iron				
8	Seal	NBR				
9	Nut	Stainless Steel				
10	Clamping Ring	Forged Brass				
11	Name Plate	Aluminum				
12	O-Ring (2)	NBR				
13	O-Ring	NBR				

DIMENSION (INCHES)

PART #	INLET	OUTLET	A	B	C	D	EØ
NFP120101A	2-1/2" FNPT	2-1/2" MNST	8.74	10.65	2.76	3.11	5.04
NFP120103A	2-1/2" Grooved	2-1/2" MNST	9.55	11.46	3.56	3.11	5.04

