



GATE HOSE VALVE

Figure 1202

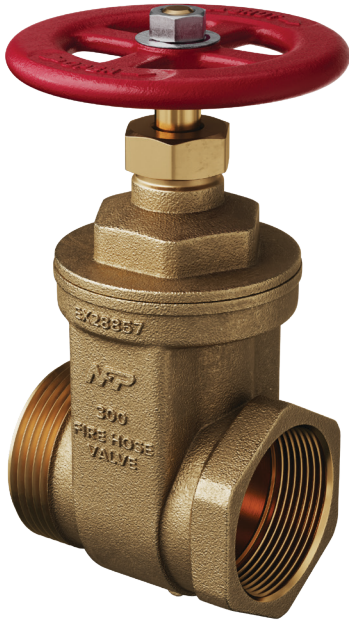

NFP120210

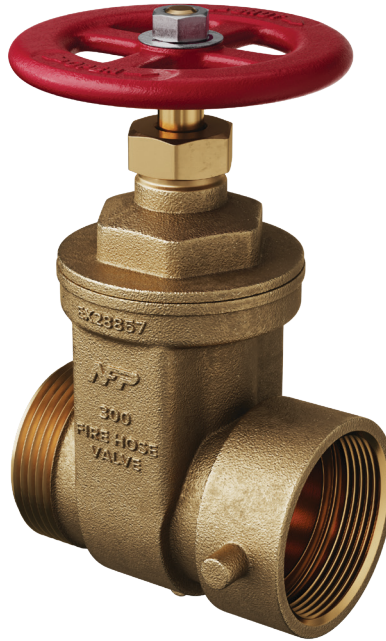

NFP120211

FEATURES & BENEFITS

- Size: 2-1/2" FNPT X MNST
- UL/FM approved
- Body Material: Brass
- Finish: Rough brass
- Hand Wheel: Ductile iron (red)
- Max Pressure: 300 psi

INSTALLATION

Use an approved thread sealant on the threads that the hose valve will be installed on. **DO NOT OVERTIGHTEN**. Overtightening may cause cracks or deformities in the valve body which could lead to failure.




*Not for use in potable systems


GATE HOSE VALVE

Figure 1202

NFP120210A

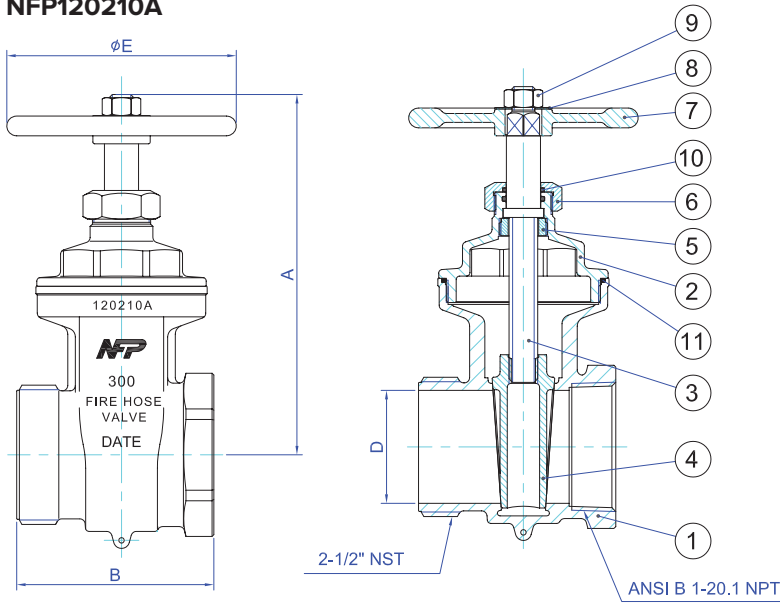


NFP120211A

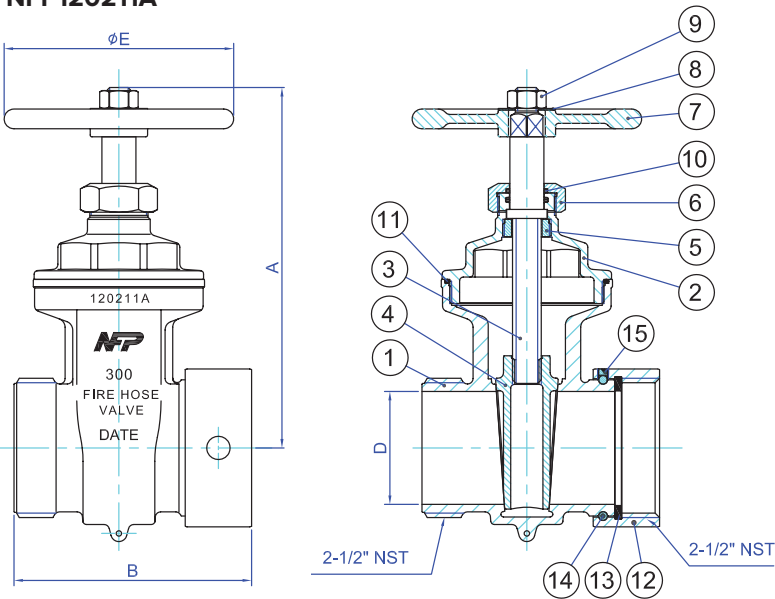

MATERIAL CHART

NO.	PART NAME	MATERIAL
1	Body	Brass ASTM B584
2	Bonnet	Brass ASTM B584
3	Stem	Brass
4	Disc	Brass ASTM B584
5	Retaining Ring	Brass
6	Packing Nut	Brass
7	Hand Wheel	Ductile Iron ASTM A536
8	Name Plate	Aluminum
9	Nut	Stainless Steel
10	O-Ring (2)	NBR
11	O-Ring	NBR
12	Hose Coupling	Brass ASTM B584
13	Rubber Facing	NBR
14	Ball Bearings (50)	Stainless Steel
15	Screw	Brass



DIMENSION (INCHES)

PART #	SIZE	THREADS	A	B	D	E
NFP120210A	2-1/2"	FNPT X MNST	7.56	4.33	2.48	5.04
NFP120211A	2-1/2"	FNPT Swivel x MNST	7.56	5.24	2.48	5.04