
© 2025 Kichler Lighting LLC All Rights Reserved

310452BSS

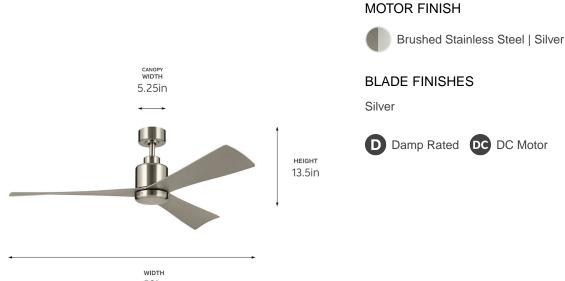

52in

AIR PERFORMANCE

AIRFLOW	RPM	POWER USAGE	AIRFLOW EFFICIENCY
Cubic Ft. Per Minute On High	Revolutions Per Minute On High	Watts On High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
4940	138	38	130

SPECIFICATIONS

Performance			
CFM (High) RPM (High)	4940 138	Watts (High) Airflow Efficiency CFM/W (High)	38 130
Motor Specifications			
Motor Type Motor Size	DC Brushless 90 X 16	Amps (High)	0.49
Mounting/Installation			
Interior/Exterior Location Rating Low Ceiling Adaptable Slope Ceiling Kit Included Max Stem Tilt	Exterior Product Damp No No 18°	Mounting Style Lead Wire Length Minimum Distance From Fan To Floor Weight	Downrod 78" 8feet 11.66LBS
Downrod 1 - Dimensions			
Blade Sweep Downrod Included Downrod 1 Overall Height	52" Yes 1.00 X 4.50 13.5"	Ceiling To Blade Canopy Depth Canopy Height Canopy Width	11.75" 5.25" 2.25" 5.25"
Light Source			
Downlight Option Light Source	Optional No Lamp Source	Lamp Included	Not Included
Electrical			
Input Voltage	120V	Battery Included	Yes
Certifications/Qualifications			
Title 20 Compliant	Yes	Reese's Law	Yes



FIXTURE ATTRIBUTES

Blade Finish & Specs			
Number Of Blades Blades Reversible Blade Finish 1	3 No Silver	Blade Material Blade Pitch Blades Included	Acrylonitrile Butadiene Styrene 20° Yes
Included Control			
Fan Primary Control System Remote Included Remote Type	Remote Yes 6 Speed DC CoolTouch-Full	# Of Speeds Limited/Full Function	6 6 Speed DC CoolTouch-Full
Product/Ordering Information			
Sku Finish	310452BSS Brushed Stainless Steel	UPC	783927044394
Housing			
Primary Material		Steel	
Warranty			
kichler.com/warranty			
ALSO IN THIS FAMILY			



You Can See All Products In This Family By Searching Kichler.com

