

MOEN®

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Quick connect installation - Duralock™
- PowerBoost™ Pro spray technology
- Pulldown spray with 89" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing
- Faucet designed for handle to be mounted on right side
- Magnetix™ technology features an innovative magnetic docking system

OPERATION

- Lever-style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the docked or retracted position

FLOW

- Minimum stream mode default is 1.1 gpm (4.2 L/min) @ 60 psi. In boost mode, maximum flow is 2.2 gpm (8.3 L/min) @ 60 psi, defaulting back to 1.1 gpm at boost mode exit.
- Minimum spray mode default is 1.1 gpm (4.2 L/min) @ 60 psi. In boost mode, maximum flow is 1.8 gpm (6.8 L/min) @ 60 psi, defaulting back to 1.1 gpm at boost mode exit.

CARTRIDGE

- 1255 Duralast™ Cartridge for Single Handle Faucets


STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- **ADA** for faucet handle operation; Wand Lever is not ADA compliant.

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

SPECIFICATIONS

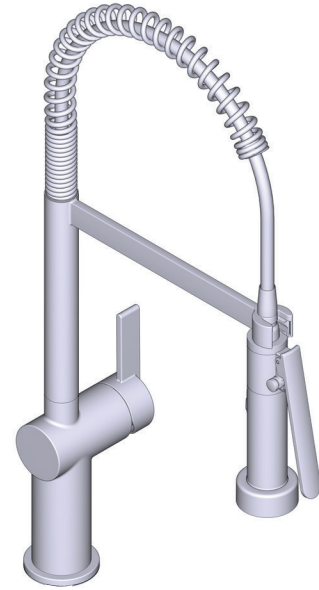

Cia™

Spring Kitchen Faucet with PowerBoost™ Pro

MODELS: 7822 Series

