



CONNECTIONS


- Discharge: 1"
- Inlet: 1-1/4"

Designed with an internal one-way vent built which eliminates the need to have an external vent pipe

PRODUCT FEATURES

- Install a half bathroom up to 9 feet below the sewer line, or even up to 120 feet away.
- Self-contained macerating system for residential applications.
- The blade is made out of a hardened stainless steel material which eliminates the need for any service or replacement.

PUMP CURVE

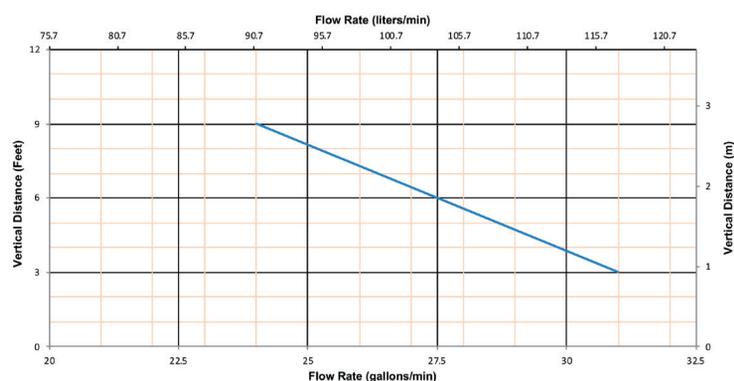

OPTIONAL ACCESSORIES

Descaler
(Part N° 052)
See page 28



TECHNICAL SPECIFICATIONS

- Pump type:** Macerator
- Electrical:** 120 V - 60 Hz / 7.2 Amps (Max)
- Motor:** 0.5 HP oil-filled thermally protected motor
- Capacitor rating:** 45 microfarad
- Operating Temperature:** 95°F (110°F Max.)
- Power cord length:** 59 inches
- Noise level:** ≤ 53 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 1"
- Discharge rate at 9 ft:** 24 GPM
- Discharge rate at 3 ft:** 31 GPM
- Normal running time:** 24 sec (18 sec ECO mode)
- Capacity:** 0.8 gallons / 0.3 liters
- Inlets:** 1-1/4" sink connection (on motor case)
- Method of activation:** Push button / circuit board
- Weight:** 67 lbs / 30 kg (Bowl with motor)
- Certifying agencies:** CSA (IPC, NSPC)
- Connections:** Sink

DIMENSIONAL DRAWINGS

