

Features

- *Compression molded from Sterling's exclusive solid VIKRELL™ material*
- *Lightly pebbled bottom surface for sure footing*
- *Shipped with a bath liner to protect product during installation*
- *Durable high gloss finish*
- *10 year consumer/3 year commercial limited warranty*
- *60" (152.4 cm) x 30" (76.2 cm) x 16-1/4 (41.3 cm) complete unit rough-in dimensions includes flange*
- *60" (152.4 cm) x 29" (73.7 cm) x 15" (38.1 cm) complete unit finished dimensions*

Codes/Standards Applicable

Specified model meets or exceeds the following:


- *ASTM E84*
- *ANSI Z124.1*
- *IAPMO/UPC*
- *HUD, UM Bulletin 73A*
- *NAHB Research Foundation, Inc.*
- *CSA B45*

Specified Model

Model	Description	Colors/Finishes	
71041110	60" (152.4 cm) bath, left drain	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
71041120	60" (152.4 cm) bath, right drain	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
71041510	60" (152.4 cm) bath, 5 pack, left drain	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
71041520	60" (152.4 cm) bath, 5 pack, right drain	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
71041810	60" (152.4 cm) bath, left drain, specialty	<input type="checkbox"/> 0 White	
71041820	60" (152.4 cm) bath, right drain, specialty	<input type="checkbox"/> 0 White	

**60" (152.4 cm) BATH
71041110**

ALSO 71041120, 71041510, 71041520

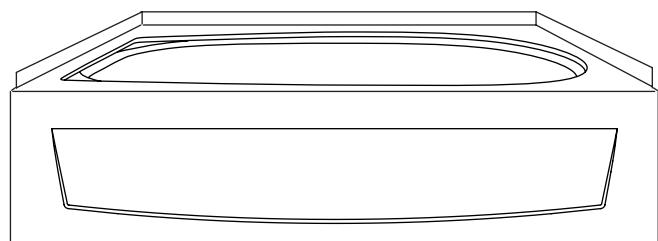

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

SterlingPlumbing.com

Visit us online for fixture color choices, detailed product information, color photos, installation instructions, care guides, and warranties. Sterling offers additional lines of plumbing products to complement the Sterling product you've chosen. Sign up for the Sterling monthly e-newsletter which showcases our latest product innovations. You may also call our Sterling Plumbing Answer Center from within the USA at 1-888-STERLING in addition to consulting with your local dealer. Sterling. Strong. Professional. Design.

PERFORMA™

Technical Information

Fixture:*	basin area	top area
Bathing well	21" (53.3 cm) x 39" (99.1 cm)	24" (61 cm) x 53" (134.6 cm)
	water depth	capacity
To overflow	10-1/4" (26 cm)	35 gals. (132.5 L)
* Approximate measurements for comparison only.		
Model	door maximum width	door maximum height
71041112/ 71041122	*60" (152.4 cm)	* NA
* Varies with alternative walls.		

Installation Notes


Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are to be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

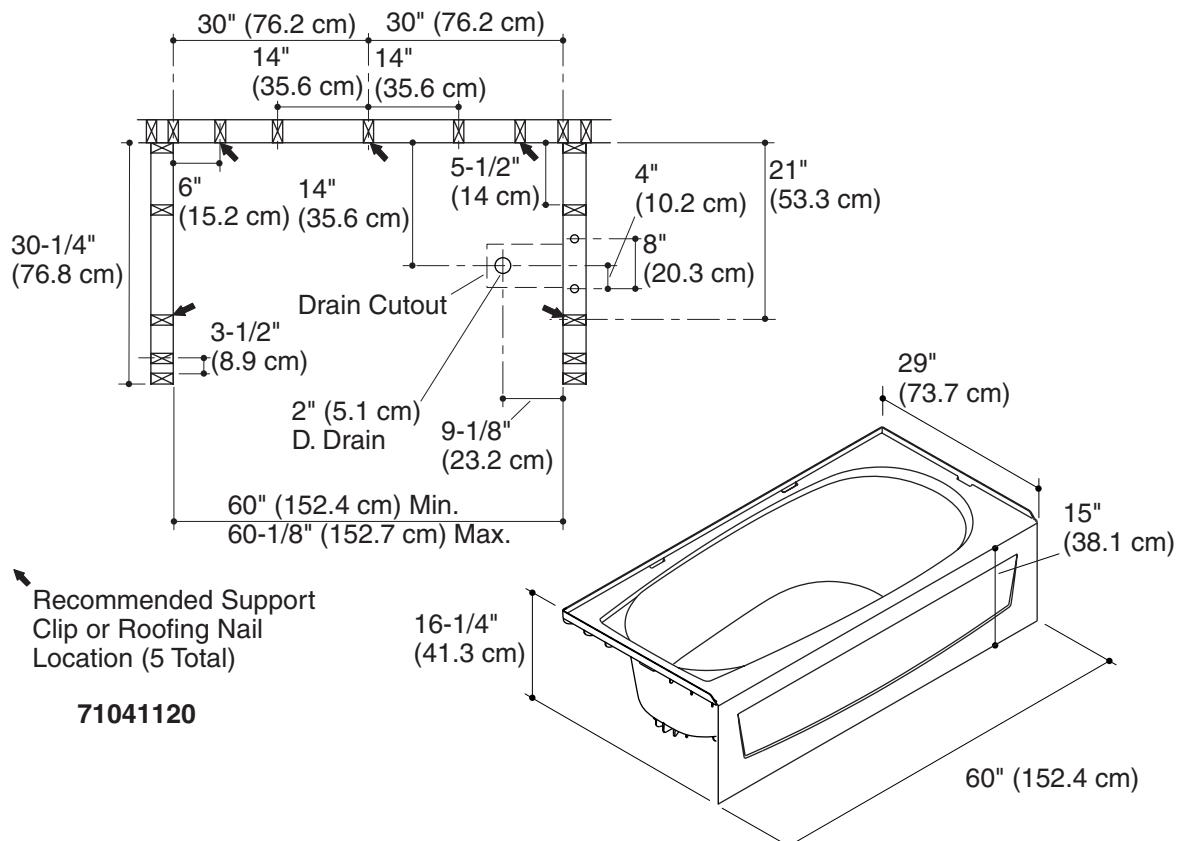

Product Diagram