




SK7200PO



Single Handle Pull-Out Kitchen Faucet

Operation & Maintenance Manual



Model Numbers	Specification
☐ SK7200PO <i>Single Handle Pull-Out Kitchen Faucet</i>	Single Handle Pull-Out Kitchen Faucet shall include single hole mount configuration, ceramic cartridge, 3/8" compression connections and standard 2.2 gpm (8.3 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish.
Warranty	Compliance
Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information. 	-ASME A112.18.1/CSA B125.1 -NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 


Dimensions

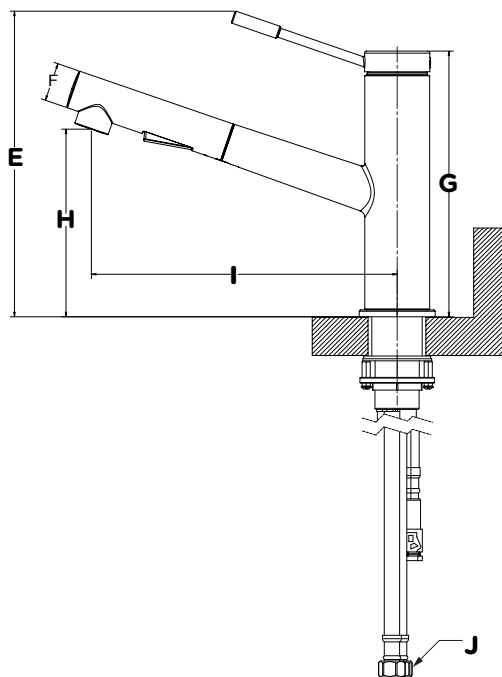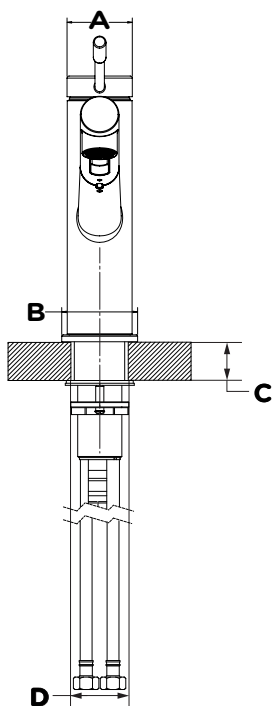

Measurements	
A	Ø 1-7/8", 47 mm
B	Ø 2-3/16", 55 mm
C	Deck Thickness Ref. Max. 1-1/2", 38 mm
D	Hole Size Ø 1-1/2", 38 mm
E	8-3/4", 222 mm
F	Ø 1-1/8", 28 mm
G	7-9/16", 193 mm
H	5-3/8", 136 mm
I	8-3/4", 222 mm
J	3/8" compression fitting

Note: Dimensions subject to change without notice.

Parts Breakdown

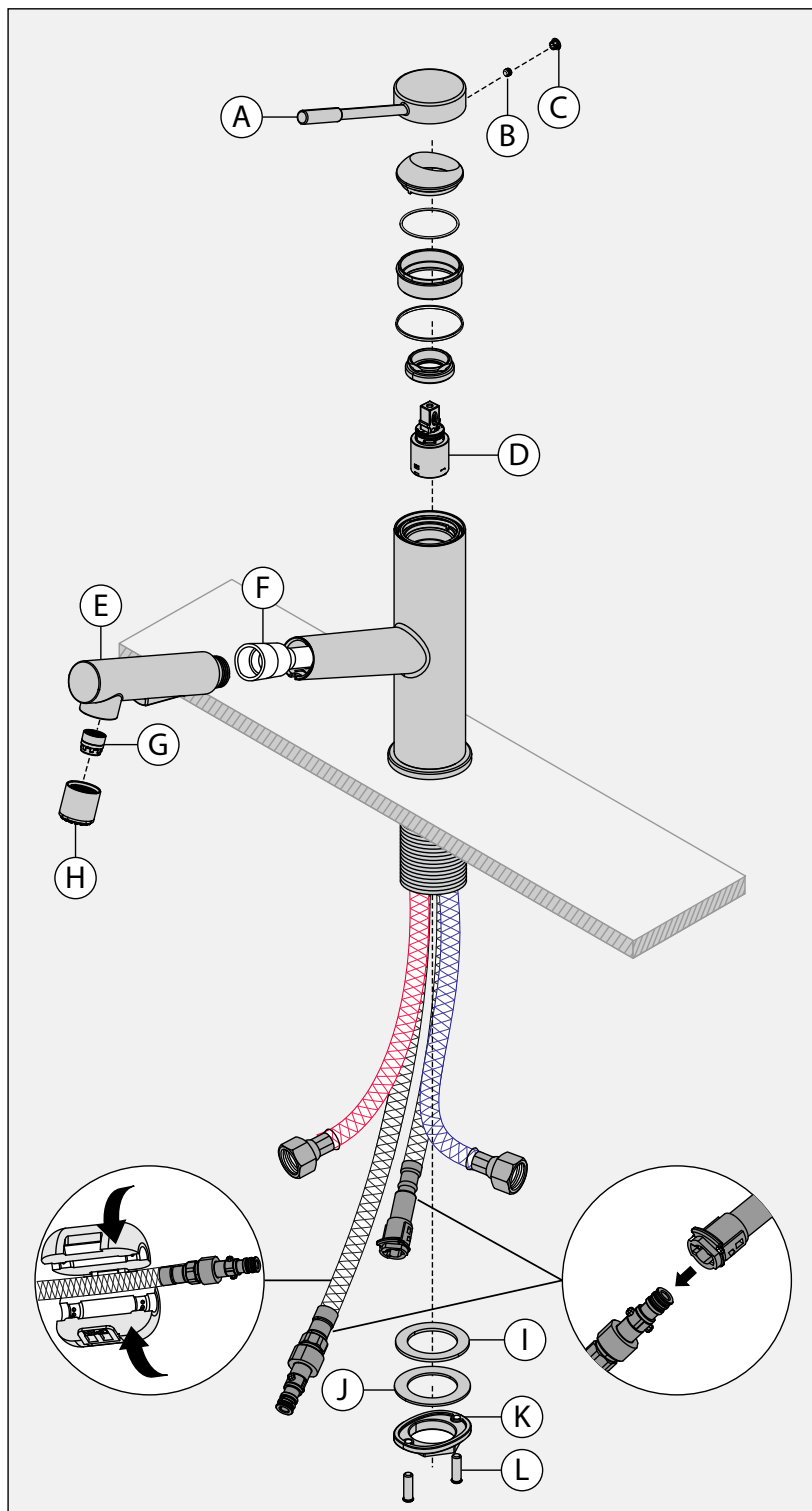

Replacement Parts

Item	Description	Part Number
A	Handle	
B	Set Screw	RK087
C	Plug Button	
D	Cartridge	RL325
E	Spray Wand	RK088
F	Pull-Out Hose	RK089-GY
G	Aerator Housing	
H	Housing	RK090-1.5
I	Rubber Washer	
J	Metal Washer	
K	Mounting Nut	
L	Screw	

Tools Required for Installation

Adjustable Wrench	
Allen Wrench: Handle (2 mm)	
Plumber Tape	
Silicone	

Installation Notes:

- 1) Apply a bead of silicone around the perimeter of all faucet trim installed to deck surface.
- 2) Apply plumber tape to threaded connections as necessary. DO NOT use plumber tape on fittings with face seal washers or o-rings.
- 3) DO NOT OVERTIGHTEN fittings with face seal washers or o-rings.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.