


Location:



SK7200PO
Single Handle Pull-Out Kitchen Faucet
Specification Submittal


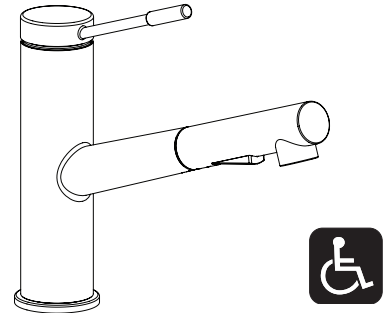


Model Numbers	Specification
☐ SK7200PO <i>Single Handle Pull-Out Kitchen Faucet</i>	Single Handle Pull-Out Kitchen Faucet shall include single hole mount configuration, ceramic cartridge, 3/8" compression connections and standard 1.5gpm (5.7 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish.
Options/Modifications	Warranty
☐ 10  <i>1.0 gpm (3.8 L/min) aerator</i> Note: Append appropriate -suffix to model number.	Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.
Compliance	
ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 	

Architectural/ Engineering Specification

Symmons Dia _____ With Single Handle Pull-Out Kitchen Faucet shall include single hole mount configuration, ceramic cartridge, 3/8" compression connections and standard 1.5 gpm (5.7 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 complaint. Available options include: " 10 - 1.0 gpm (3.8 L/min) aerator.

Dimensions

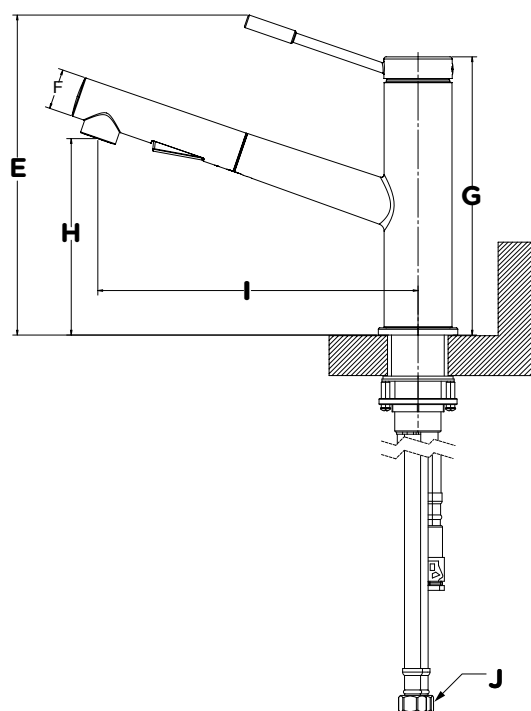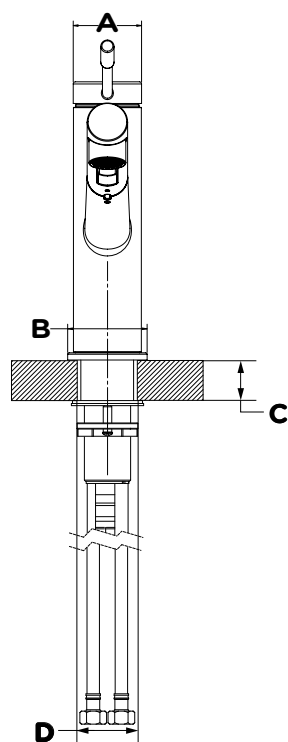

Measurements	
A	Ø 1-7/8", 47 mm
B	Ø 2-3/16", 55 mm
C	Deck Thickness Ref. Max. 1-1/2", 38 mm
D	Hole Size Ø 1-1/2", 38 mm
E	8-3/4", 222 mm
F	Ø 1-1/8", 28 mm
G	7-9/16", 193 mm
H	5-3/8", 136 mm
I	8-3/4", 222 mm
J	3/8" compression fitting

Note: Dimensions subject to change without notice.


Emplacement:



SK7200PO

Robinet de cuisine monopièce à une poignée

Présentation des spécifications





Numéro de modèle	Spécification
☐ SK7200PO <i>Robinet de cuisine monopièce à une poignée</i>	Le robinet de cuisine monopièce à une poignée présente une configuration de fixation à trou unique. Il comprend une cartouche en céramique, 1,5 po tuyaux tressés en acier inoxydable avec 3/8 po raccords à compression, un bec rétractable à l'horizontale avec douchette et un régulateur de débit standard de 1,5 gpm (5,7 L/min). Composants faits de laiton et de matériaux non métalliques au fini chrome poli standard.
Modifications	
☐ 10  Réducteur de débit de 1,0 gpm (3,8 L/min) Remarque: Juxtaposer le suffixe approprié au numéro de modèle.	
Compliance	Garantie Garantie limitée - à l'acheteur original dans les installations du consommateur/résidentiel. 10 Ans - pour les installations commerciales/industriel. Se reporter au www.symmons.com/warranty pour l'information complète concernant la garantie.

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372





Dimensions

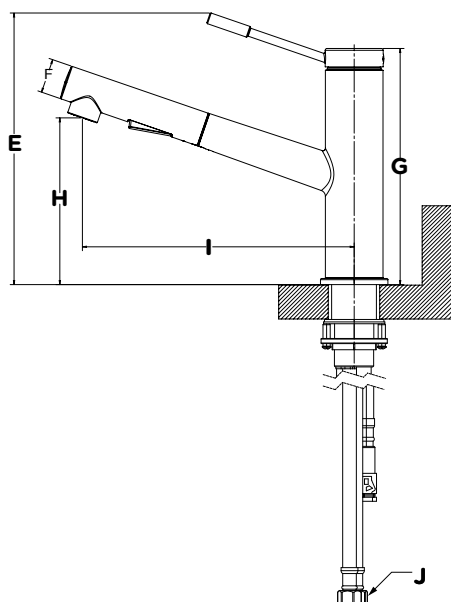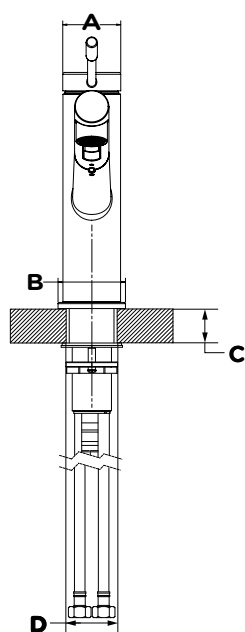

	Mesures
A	Ø 1-7/8 po, 47 mm
B	Ø 2-3/16 po, 55 mm
C	Épaisseur du comptoir Max. 1-1/2 po, 38 mm
D	Taille du trou Ø 1-1/2 po, 38 mm
E	8-3/4 po, 222 mm
F	Ø 1-1/8 po, 28 mm
G	7-9/16 po, 193 mm
H	5-3/8 po, 136 mm
I	8-3/4 po, 222 mm
J	Raccord à compression 3/8 po

Remarque: Les dimensions sont sujettes à changer sans préavis.