



CAUTION / WARNING

1. Keep the machine upright. Tilting or laying flat will cause the oil to over flow
2. Do not disassemble or attempt to repair the diffuser. If any failure happens to the machine, please see the Troubleshooting section.
3. The touchscreen buttons become invalid after 1 minute of inactivity.
4. If the display freezes, please reset to default settings. (Press and hold the ENT button until it "beeps")



CLEANING

The machine should be cleaned when:

- You're are switching to a different oil.
- The atomization volume becomes weak.

Cleaning steps:

- Pull out the atomized head and loosen the bottle.
- Use a large container filled with industrial alcohol to soak the atomized head and bottle in for 5-10 minutes.
- Air out the atomized head and bottle.



OPTIONAL WALL MOUNTING

1. Line up the mounting bracket where you would like to install the diffuser on the wall.
2. Drill holes in the wall. Insert the wall anchors, then the screws, then tighten the bracket to the wall.
3. Hang the diffuser on the bracket.



OPTIONAL HVAC INSTALLATION

1. Once fragrance bottle is installed in the ScentBeat diffuser, screw brass push-lock fitting into top
2. Connect supplied poly tubing to brass fitting
3. Drill hole in air handler ducts where fragrance is desired and insert other end of tubing
4. **IMPORTANT: Ensure HVAC fan is set to "ON"** so it runs independent from heating/cooling. This will prevent fragrance build up in the ducts



TROUBLESHOOTING

Please try to diagnose the problem using the following solutions.

Weak or No Diffusion:

- Check to ensure the machine is not in a "non-working period".
- The air pump may be damaged, replace if still under warranty.
- Check to ensure the tube is not loose.

Oil Leaking or Spraying:

- Check to ensure the bolt is not loose.
- The gasket in the atomized head may be damaged or loose.
- The atomized head is damaged, contact support if still under warranty.

FERGUSON®

WIDE AREA FRAGRANCE DIFFUSER

TABLETOP, WALL MOUNT, OR HVAC USE

BLUETOOTH APP CONTROL

ANTI-TAMPERING 'SAFELOCK'

ScentBeat 850

USER MANUAL




POWERED BY
ScentBridge



Search the Google Play Store (Android) or the App Store (iOS) for "Scent Marketing"

TO LOG IN

- Ensure Bluetooth is enabled on your smart device
- Open the app and select "Bluetooth Version"
- Tap diffuser name (default is a string of letters and numbers but can be renamed later)
- Enter the default password "8888" and tap "Login"
- The system will beep when connected

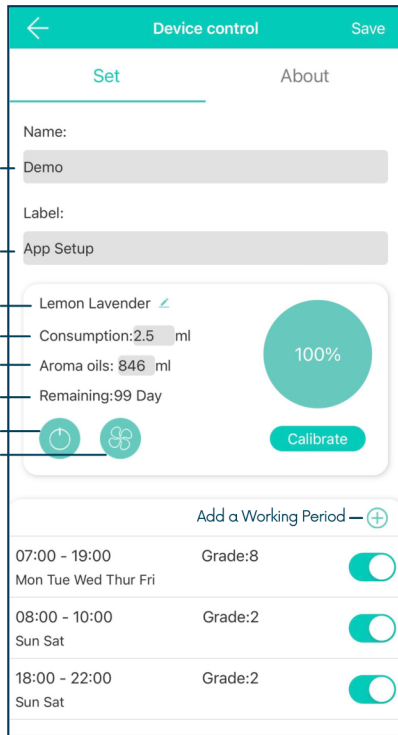

Tap to edit Diffuser Name

Tap to edit Diffuser Label

Tap to edit name of fragrance

Tap to edit consumption rate

Tap to edit amount of oil in bottle

Remaining oil estimate


Power diffuser on/off

Power fan on/off

In this example fragrance will diffuse Monday - Friday from 7 AM - 7 PM at Grade 8

Saturday & Sunday from 8 AM - 10 AM then 6 PM - 10 PM at Grade 2

TO EDIT WORKING PERIODS

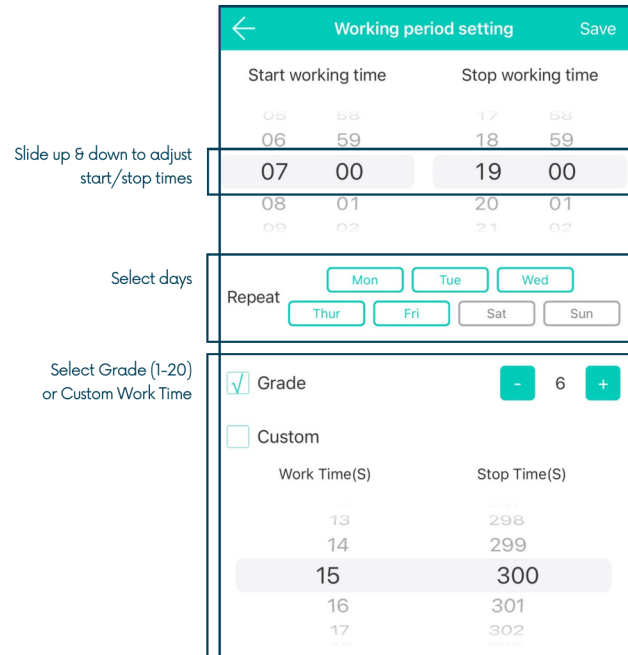

Slide up & down to adjust start/stop times

Select days

Select Grade (1-20) or Custom Work Time

TO CHANGE PASSWORD

- Tap "About"
- Tap "Change Password"
- Enter new password and tap "Confirm"




SPECIFICATIONS

- Bottle Capacity: 150 ml / 850 ml
- Input Voltage: DC12V
- Power: 9W
- Coverage: up to 5,000 sq.ft.
- Material: Plastic
- Weight: 2.13kgs/G.W.: 2.8kgs
- Color: White / Black



INCLUDED

- 1x ScentBeat Diffuser
- 1x ScentBeat Manual
- 1x Power Supply Plug
- 1x SafeLock Key
- 1x Wall Mount Bracket
- 1x Poly Tubing
- 1x Thread Sealant Tape
- 1x Wall Mounting Hardware (3 wall anchors & 3 screws)
- 1x Extra Atomized Nozzle Connector
- 1x Brass Push-Lock Connector

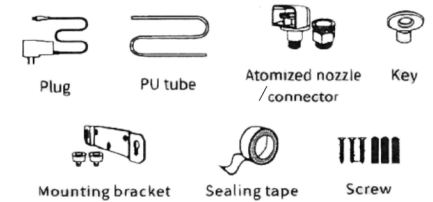

GETTING STARTED

1. Use the SafeLock key to unlock and open the door (lock is located on the right side of the unit)
2. Unscrew the atomized nozzle from the top of the unit and remove the atomized head from inside the diffuser
3. Insert the straw into the bottle of ScentBridge fragrance oil and tighten fully
4. Reinstall the atomized head with attached fragrance bottle into the diffuser
5. Screw on the atomized nozzle (for table-top or wall mount use) or brass push-lock connector (for HVAC use)
6. Plug in the device using the provided power supply plug
7. Lock the diffuser door using the SafeLock key
8. Adjust settings as needed in Scent Marketing App



SCAN THE QR CODE TO BROWSE AND ORDER NEW FRAGRANCES!

OR VISIT SHOP.SCENBRIDGE.COM

