

DESCRIPTION

- Metal Wand
- Reflex™ pulldown system offers smoother operation, easy movement and secure docking
- Powerclean™ Spray Technology for more force, less splash
- Duralock™ quick connect installation
- Metal construction with various finishes identified by suffix
- Pulldown spray with 68" braided hose
- High arc spout provides height and reach to fill or clean large pots while pullout wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Flexible supply lines with 3/8" compression fittings
- Compatible with F9800 Advanced Filtration System, or F9900 Reverse Osmosis with Air Gap 105895 Series (Sold Separately)

OPERATION

- Three function spray wand: unfiltered stream, unfiltered powerclean spray and filtered laminar stream
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Temperature controlled by 100° arc of handle travel


FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi for unfiltered water
- Flow is 0.7 gpm (2.6 L/min) for filtered water

CARTRIDGE


- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to ASME A112.18.1/CSA-B125.1 and all applicable requirement referenced therein including NSF61/9 & 372
- Certified by IAPMO R&T to NSF/ANSI 372 for Low Lead Content and NSF/ANSI 42, 58, and CSA B483.1 for material safety and structural integrity requirements
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA  for lever handles
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

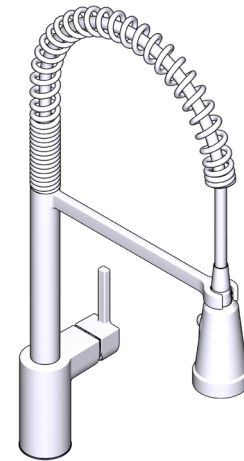


Align™

3-in-1 Water Filtration Pre-Rinse Pulldown Kitchen Faucet

MODELS: F5923 Series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

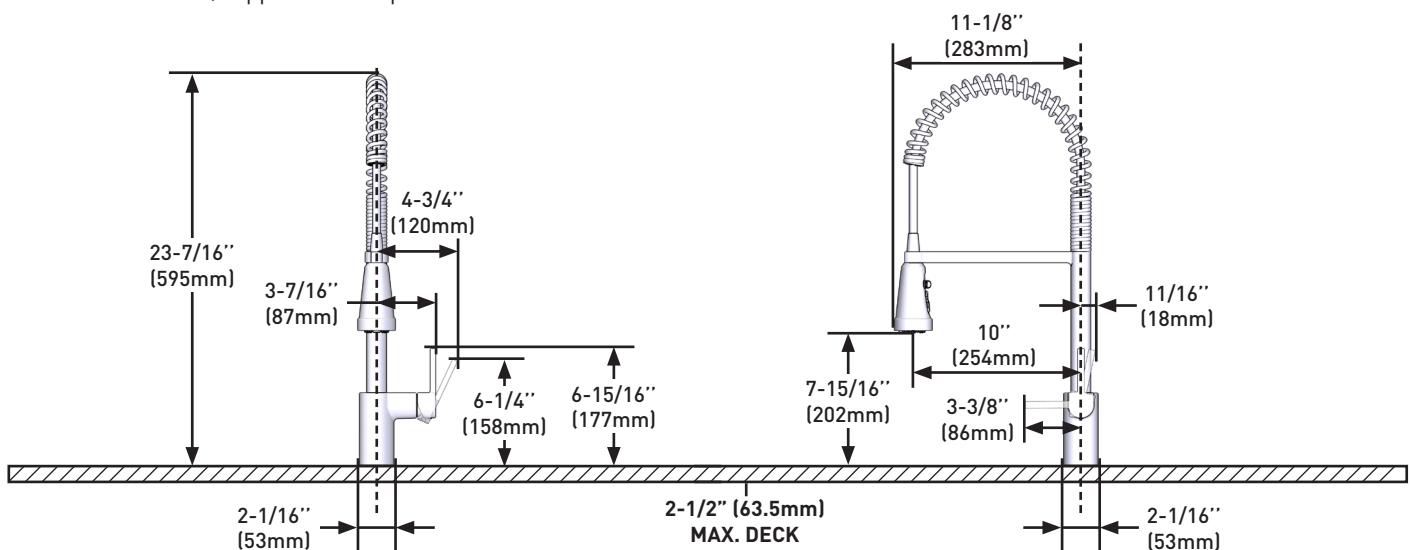

CRITICAL DIMENSIONS DO NOT SCALE