



ROCKFORD SEPARATORS

5159 28th Ave ROCKFORD, IL 61109

(815) 229-5077 - FAX (815) 229-5108

www.rkfdseparators.com - rssem@rkfdseparators.com

MODEL NO. GIS-SPC-70


GREASE SEPARATOR

DRAWN BY R.P.P.

QUOTE#:



DATE: 03/05/24

JOB NAME:

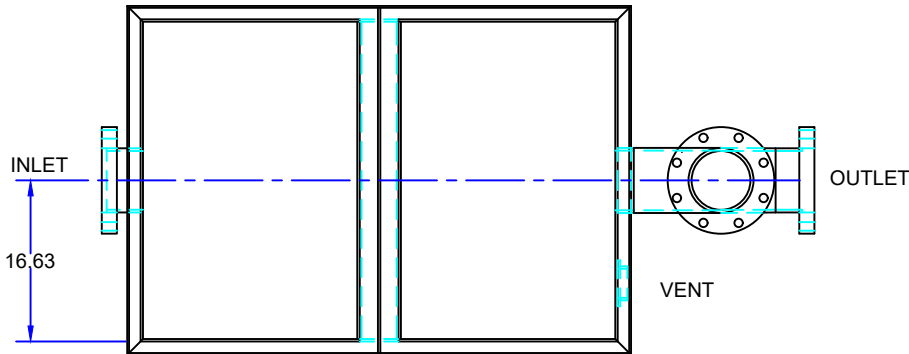

OPTIONAL FEATURES (ADDITIONAL COST)

- ☐ ANCHOR FLANGE
- ☐ CLAMP RING
- ☐ RECESSED LIFT HANDLES IN COVERS
- ☐ EPOXY COATING
- ☐ ANODES
- ☐ HEAVY DUTY H2O REINFORCED CONSTRUCTION
- ☐ STAINLESS STEEL CONSTRUCTION
- ☐ SEDIMENT BASKET
- ☐ FILTER MEDIA
- ☐ INTEGRAL EXTENSION _____ INCHES
- ☐ ALUMINUM COVER
- ☐ ALTERNATE INLET & OUTLET SIZE _____ INCHES
- ☐ ALTERNATE VENT CONNECTION SIZE _____ INCHES
- ☐ DOUBLE WALL CONSTRUCTION
- ☐ LEAK DETECTION
- ☐ HOLD DOWN PADS

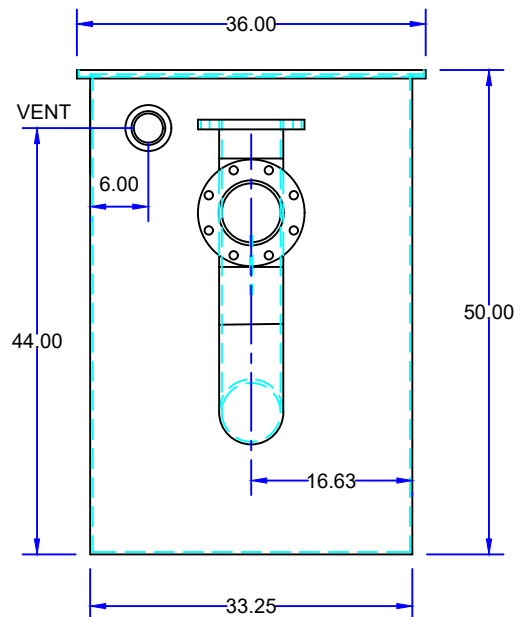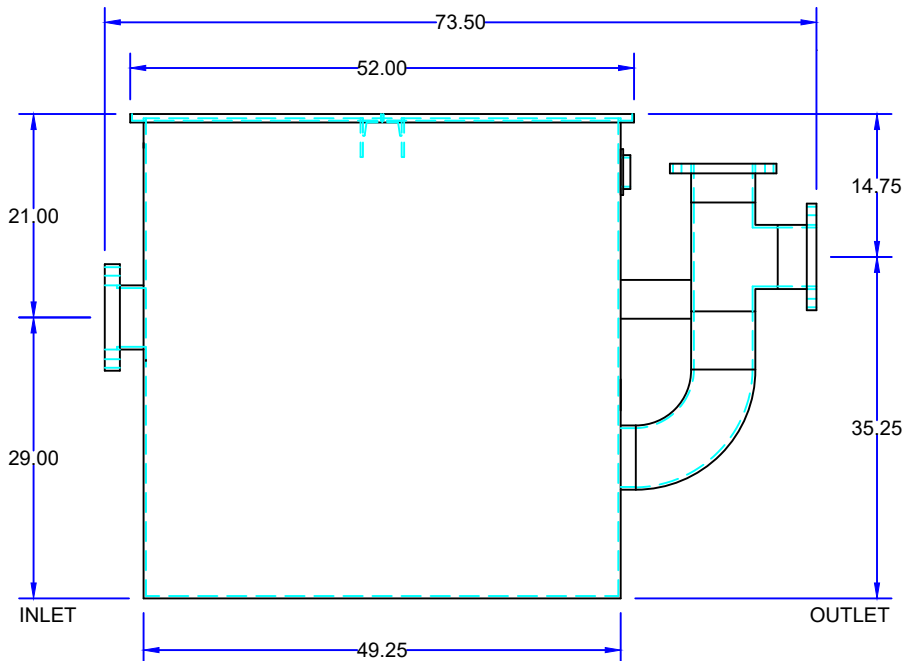

SPECIFICATIONS

Specially fabricated Rockford Model GIS-SPC-70 all welded 1/4" steel separator, 225 gallon static capacity, 200 g.p.m. intermittent flow, 6.00" companion flange inlet/outlet with 3.00" tapped internal vent connection, 1134 lbs greasy sludge capacity, visible double-wall outside trap seal, separator plate and removable filter screen, removable 3/8" nonskid diamond tread plate covers for flush with floor installation suitable for pedestrian traffic secured with stainless flat head screws, heavy duty leak-proof gasket, OPEX Shop Coat coating inside and bituminous coating outside.

Optional features (Additional cost) listed above

Approved By

Company

Date