



ROCKFORD SEPARATORS

5159 28th Ave ROCKFORD, IL 61109
(815) 229-5077 - FAX (815) 229-5108
www.rkfdseparators.com - rssem@rkfdseparators.com

MODEL NO. RGI-1000

GREASE SEPARATOR

DRAWN BY R.P.P.

QUOTE#:




DATE: 03/01/24

JOB NAME:

Note: Standard unit includes 6" manway base.
Additional manway height can be made to accommodate inlet invert requirements.

OPTIONAL FEATURES (ADDITIONAL COST)

- ADDITIONAL _____ MANWAY HEIGHT REQUIRED
- INLET & OUTLET SIZE _____ INCHES
- EPOXY COATING
- STAINLESS STEEL CONSTRUCTION
- GREASE MONITOR SYSTEM
- HOLD DOWN PADS
- RECESSED LIFT HANDLES IN COVERS
- ANCHOR FLANGE

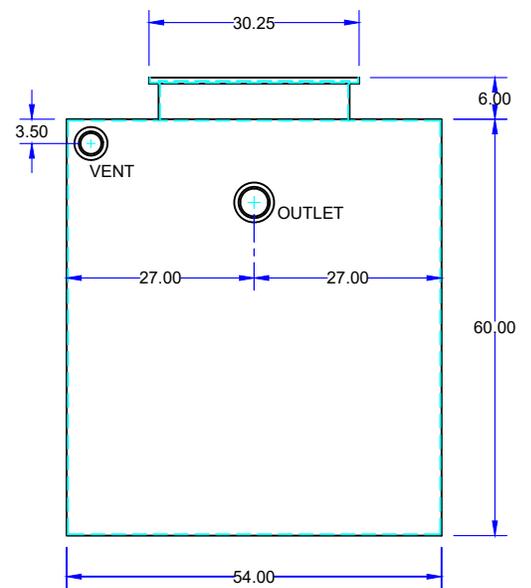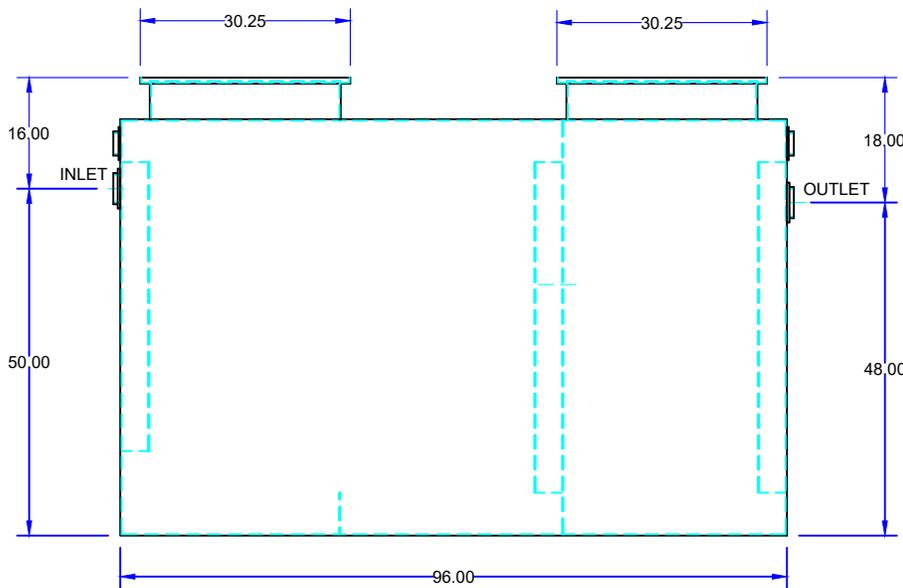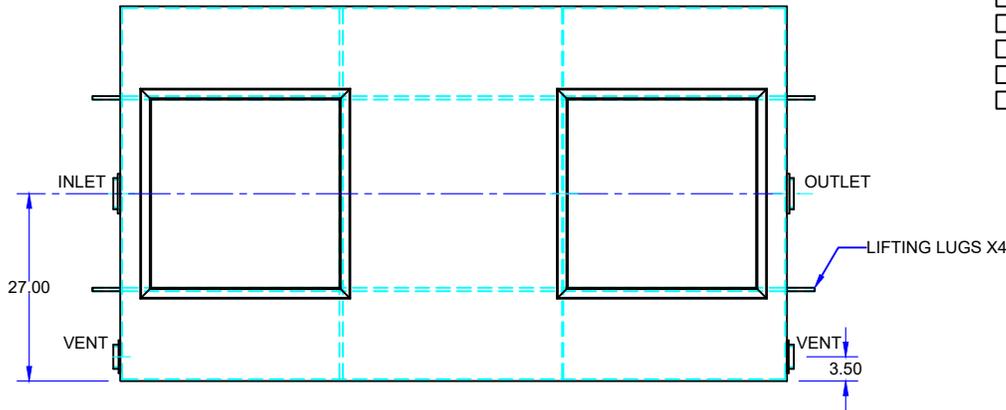

SPECIFICATIONS

Rockford Model RGI-1000 all welded steel gravity grease interceptor, with 750 gpm intermittent GPM, 1000 gallon capacity, 2,333 LBS greasy sludge capacity, 4.00" threaded inlet/outlet and 3.00" vent connections, removable 3/8" nonskid tread plate cover for above grade installation or flush with grade installation suitable for heavy traffic loading (H/20). Secured with stainless steel flat head screws, heavy duty leak proof gasket, with bituminous coating outside. Supplied with lifting lugs X4. Approximate ship weight of 2200 Lbs.

Note: Standard unit includes 6" manway base. Additional manway height can be made to accommodate inlet invert requirements.

Units built to IAPMO/ANSI Z1001-2014 construction standard for fabricated gravity interceptors.

Optional features (Additional cost) listed above

Approved By

Company

Date