



# ROCKFORD SEPARATORS

5159 28th Ave ROCKFORD, IL 61109  
(815) 229-5077 - FAX (815) 229-5108  
www.rkfdseparators.com - rssem@rkfdseparators.com

MODEL NO. RGI-150

GREASE INTERCEPTOR

DRAWN BY R.P.P.

QUOTE#:




DATE: 03/01/24

JOB NAME:

Note: Standard unit includes 6" manway base.  
Additional manway height can be made to accommodate inlet invert requirements.

### OPTIONAL FEATURES (ADDITIONAL COST)

- ADDITIONAL \_\_\_\_\_ MANWAY HEIGHT REQUIRED
- INLET & OUTLET SIZE \_\_\_\_\_ INCHES
- EPOXY COATING
- STAINLESS STEEL CONSTRUCTION
- GREASE MONITOR SYSTEM
- HOLD DOWN PADS
- RECESSED LIFT HANDLES IN COVERS
- ANCHOR FLANGE

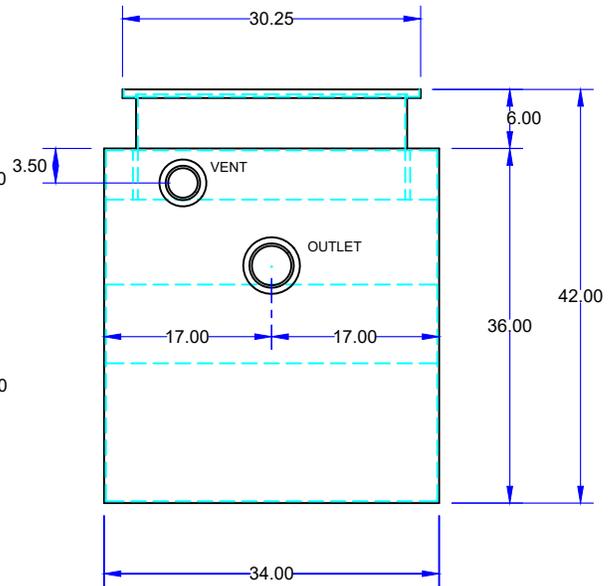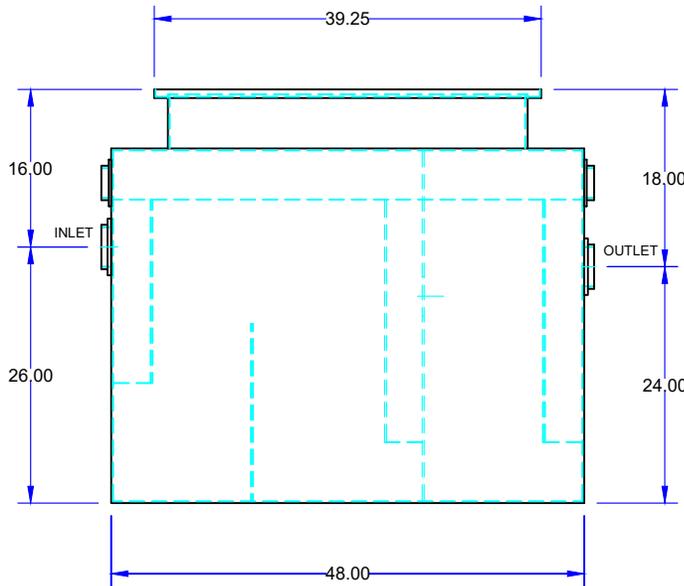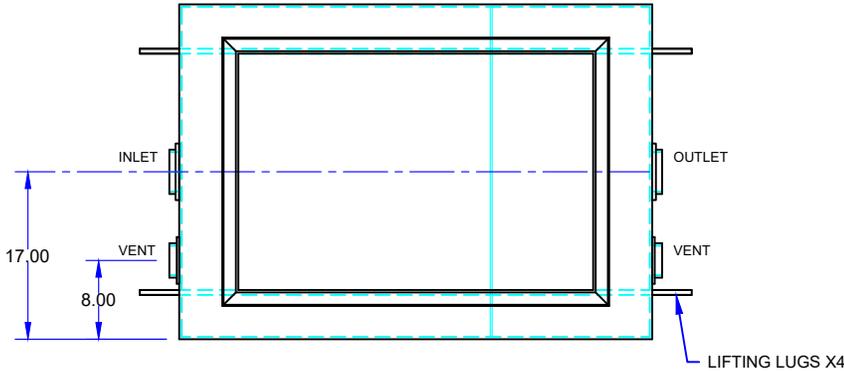

## SPECIFICATIONS

Rockford Model RGI-150 all welded steel gravity grease interceptor, with 100 intermittent GPM, 150 gallon capacity, 350 LBS greasy sludge capacity, 4" threaded inlet/outlet and 3" vent connections, removable 3/8" nonskid tread plate cover for flush with grade installation suitable for heavy traffic load (H/20), secured with stainless steel flat head screws, heavy duty leak proof gasket, with bituminous coating outside. Supplied with lifting lugs X4. Approximate ship weight of 750 Lbs.

Note: Standard unit includes 6" manway base. Additional manway height can be made to accommodate inlet invert requirements.

Units built to IAPMO/ANSI Z1001-2014 construction standard for fabricated gravity interceptors.

Optional features (Additional cost) listed above

Approved By

Company

Date