

Job Name:

System Reference:

Date:



- GENERAL FEATURES
- Dual set point functionality
 - Compact, lightweight, flat-white, flat-panel, modern design
 - Quiet operation
 - Multiple fan speed settings
 - Easily removed intake grille filter for cleaning
 - Back and right-side wiring take-out
 - Wireless receiver on board

Specifications			System
Unit Type			PKFY-P12NLMU-ER1.TH
Cooling capacity (Nominal) ¹		BTU/H	12,000
Heating capacity (Nominal) ¹		BTU/H	13,500
Power source		Voltage, Phase, Hertz	208/230V, 1-phase, 60 Hz
Power Consumption	Cooling	kW	0.04
	Heating	kW	0.03
Current	Cooling	A	0.4
	Heating	A	0.3
MCA		A	0.24
Maximum Overcurrent Protection (MOCP)		A	15
Recommended Fuse Size		A	15
External finish		Plastic, MUNSELL (0.7PB 9.2/0.4)	
External Dimensions		In. [mm]	30-7/16 x 9-11/32 x 11-25/32 [733 x 237 x 299]
Net weight		Lbs [kg]	24.5 [11.1]
Heat exchanger		Cross fin (Aluminum fin and copper tube)	
Fan	Type x quantity	Line flow fan x 1	
	Airflow rate	CFM	152–191–244–297
	Motor type	DC Motor	
	Motor Output	kW	.03
	Motor FLA	A	0.19
Sound pressure level (Measured in anechoic room)		dB(A)	24–31–37–41
Air filter		PP honeycomb	
Refrigerant		Type	R410A
Diameter of refrigerant pipe (O.D.)	Liquid (High Pressure)	In. [mm]	1/4 [6.35] Flare
	Gas (Low Pressure)	In. [mm]	1/2 [12.70] Flare
Diameter of drain pipe		In. [mm]	I.D. 5/8 [16]

NOTES:
Cooling | Indoor: 81° F (27° C) DB / 66° F (19° C) WB; Outdoor 95° F (35° C) DB
Heating | Indoor: 68° F (20° C) DB; Outdoor 45° F (7° C) DB / 43° F (6° C) WB

INDOOR UNIT ACCESSORIES: PKFY-P12NLMU-ER1.TH


Control Interface	3-Pin Connector	PAC-715AD
	CN24 Relay Kit	CN24RELAY-KIT-CM3
	Connector and wire for Operation status/error using CN51	PAC-725AD
	Deluxe Wired MA Remote Controller	PAR-41MAAU
	IT Extender	PAC-WHS01IE-E
	kumo station® for kumo cloud®	PAC-WHS01HC-E
	Procon BACnet® and Modbus® Interface	PAC-UKPRC001-CN-1
	Thermostat Interface	PAC-US445CN-1
	Wireless Interface for kumo cloud®	PAC-USWHS002-WF-2
Remote Sensor	Flush Mount Remote Temperature Sensor	PAC-USSEN002-FM-1
	Remote Temperature Sensor	PAC-SE41TS-E
	Wireless temperature and humidity sensor for kumo cloud®	PAC-USWHS003-TH-1
Terminal Signal Adapter	Terminal Signal Adapter	PAC-IT51AD-E
	Terminal Signal Adapter	PAC-IT52AD-E
Wired Remote Controller	Simple Ductless Wired Remote Controller	PAC-SDW01RC-1
	Simple MA Remote Controller†	PAC-YT53CRAU-J
	Touch MA Controller†	PAR-CT01MAU-SB
Wireless Remote Controller	kumo touch™ RedLINK™ Wireless Controller	MHK2
Condensate	Blue Diamond MultiTank — collection tank for use with multiple pumps	C21-014
	Blue Diamond Sensor Extension Cable — 15 Ft.	C13-103
	Drain Pan Level Sensor/Control	SS610E
	Fascia Kit for MicroBlue Pump, mounts the MicroBlue and sensor directly beneath indoor unit	T18-016
	Refco Condensate Pump (100-240 VAC)	GOBI-II
	Refco Condensate Pump (100-240 VAC) up to 120,000 BTU/H	COMBI
	Sauermann Condensate Pump	SI30-230
Disconnect Switch	(30A/600V/UL) [fits 2" X 4" utility box] - Black	TAZ-MS303
	(30A/600V/UL) [fits 2" X 4" utility box] - White	TAZ-MS303W
Drain Hose	Flexible Mini-Split Drain Hose	DRX-16

NOTES:

**High efficiency filter requires use of multi-function casement: PAC-SJ41TM-E

INDOOR UNIT DIMENSIONS: PKFY-P12NLMU-ER1.TH

Unit: inch(mm)

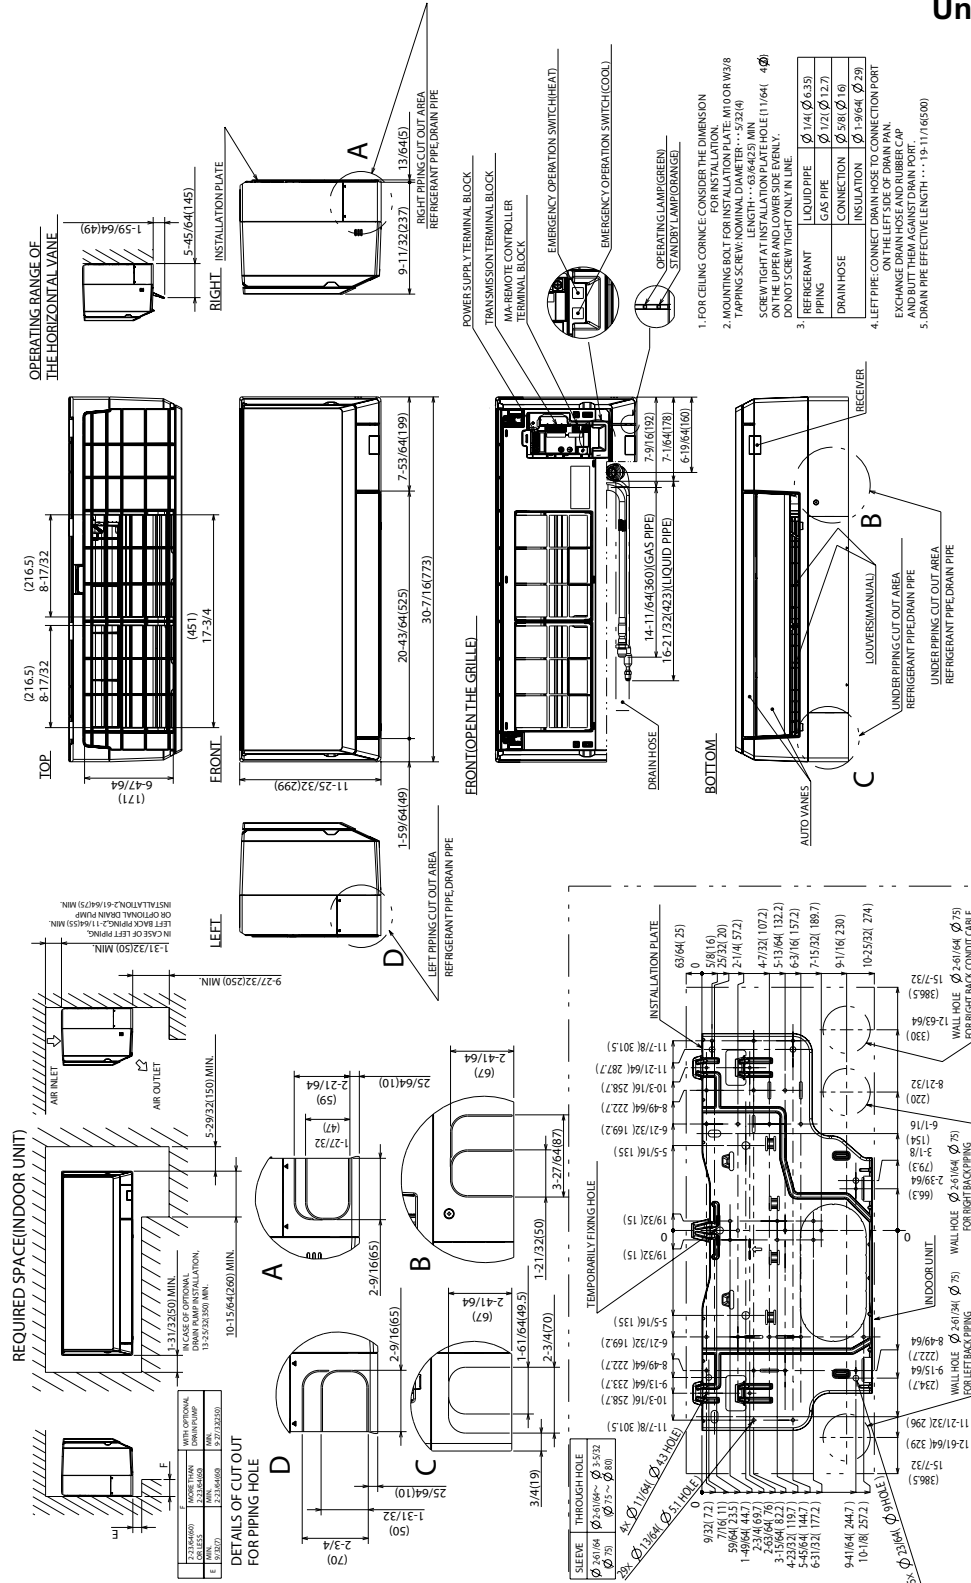

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

FORM# PKFY-P12NLMU-ER1.TH - 202405

Specifications are subject to change without notice.

© 2024 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.