



The new degree of comfort.®

Rheem® IKONIC® Super High Efficiency Condensing Tankless Gas Water Heater

Easy Installation

- PVC Vent runs up to 70' (2"), 150' (3")
- Easy set up with full text digital display and no dip-switches

Ready for Retrofits

- Allows flex venting through existing B-vent up to 50'
- 1/2" Gas line compatibility (subject to local code)
- Approved for installations in Manufactured Home (Mobile Home) environments

Key Features

- Stainless steel Primary and Secondary heat exchangers provide increased efficiency and durability
- **Rheem® Exclusive!** Hot-start programming™ ensures the unit is in a ready state between back-to-back usage, avoiding any cold water bursts
- Built-in Recirculation pump for no wait continuous hot water at the tap (SR models)
- Built-in EcoNet® Wi-Fi technology for direct control from your device (optional for S models)

Specifications

Rheem Model Number		RECTGH-S84iN RECTGH-S84iP RECTGH-SR84iN RECTGH-SR84iP	RECTGH-S10iN RECTGH-S10iP RECTGH-SR10iN RECTGH-SR10iP	RECTGH-S11iN RECTGH-S11iP RECTGH-SR11iN RECTGH-SR11iP
Gas Input Rate	MAX	157,000 BTU/h	180,000 BTU/h	199,900 BTU/h
	MIN	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h
Uniform Energy Factor (UEF)		0.96		
Hot Water Flow Rate Capacity – Gallons Per Minute (GPM)	MAX (35°F)	8.4	10.1	11.2
	45°F Rise	6.9	7.9	8.8
	67°F Rise	4.6	5.3	5.9
Number of Bathrooms ¹		3	4	5
Temp. Range		85°F - 140°F		
Temp. Setting from Factory		120°F		
Installation Type		Indoor (Outdoor Conversion Kit sold separately: RTGH-SX)		
Heat Exchanger Material		Primary: Stainless Steel – Secondary: Stainless Steel		
Minimum Activation Flow		0.4 GPM		
Minimum Continuous Flow		0.26 GPM		
Maximum Altitude		10,200 ft.		
Ultra Low NOx		Meets 14 ng/J NOx requirements – SCAQMD Rule 1146.2 compliant		
Warranty		15 Year Heat Exchanger 5-Year Parts 1-Year Labor		

Model Number	RECTGH-SiN/P	RECTGH-SRiN/P
Height	28-9/16"	
Width	17-5/16"	
Depth	13-11/16"	
Weight	77.6lbs	86lbs
Venting Diam. Allowed	2" / 3"	
Max. Single Vent Run (straight pipe)	70 ft (2")/ 150 ft (3")	
Venting Materials	Sched. 40 PVC, CPVC, Polypropylene	
Common Venting (max. units)	2 units ³	
Flex Venting	Allowed: 2" up to 50'	
Manifold Controls (max. units)	Up to 20 units without external control required ⁴	
Controls	Built-in digital display with full-text menus	
Power Supply	120V 60Hz	
Max. Power Consumption	85W (Normal use), 0.7Amps	100W (Normal use), 0.83Amps
	132W (Anti freeze only), 1.1Amps	200W (Anti freeze), 1.67Amps
	3.5W (Standby), 0.03Amps ⁵	3.5W (Standby), 0.03Amps ⁵
Gas Connection	3/4" NPT	
Hot Water Connection	3/4" NPT	
Cold Water Connection	3/4" NPT	
Condensate Connection	1/2" NPT	
Vent Connections Diameter	2" Band Connections (Adapter required to vent with 3" PVC from unit)	

¹For Propane replace the N with P when ordering.



Crossover valve⁷ and service valves included.

OVER \$175 VALUE

RECTGH-S11iN(P)*/RECTGH-SR11iN(P)*, RECTGH-S10iN(P)*/RECTGH-SR10iN(P)*, & RECTGH-S84iN(P)*/RECTGH-SR84iN(P)*

Indoor Models

(Outdoor Conversion Kit Available:

RTGH-SX)


11,000-199,900 BTU/h

Natural and LP Gas



Clearances	
Top / Bottom	12"
Front	1/2" ⁶
Sides	1/2"
Back / From Vent Pipe	0"

Recirculation Length (SRi Models)	
Pipe Diameter	Max. Recirculation Loop
3/4"	400 ft.
1/2"	100 ft.

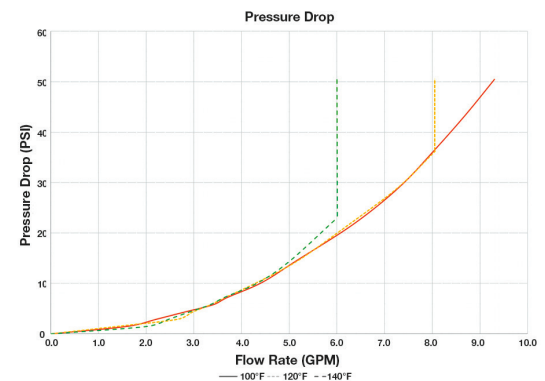


¹ Based on simultaneous showers using 2 GPM flow rate pre-mixed with cold water line. Flow rates vary depending on temperature of incoming cold water and water heater set temperature. Refer to capacity table by zone for accurate sizing. ² For indoor application, this is the temperature of outdoor intake air. ³ External check valve required for installation. ⁴ Manifolds with standard RJ25 communication cables. ⁵ If anti freeze is on and combustion is on, total W will be 217W (85+132). ⁶ Recommended 24" clearance for service.

Rheem® IKONIC® Super High Efficiency Condensing Tankless Gas Water Heater



The new degree of comfort.™

US Ground Water Temperature Zone Map

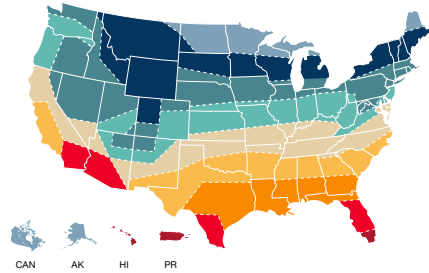

Average Flow Rates (GPM) by Application

Low Flow Faucet	0.5
Bathroom Faucet	1
Kitchen Faucet	1.5
Shower	2
Dishwasher	2
Washing Machine	3

Flow rates may vary.

Flow Rate Capacity Table by Zone (Gallons Per Minute - GPM)

Use the U.S. Ground Water Temperature Map to locate your zone. Then use the Flow Rate Capacity Table to determine model flow rate by zone. Flow rates calculated for tankless set temperature of 120°F with a mixed shower temperature of 105°F. Ground water temperature varies seasonally.

MODEL #	Zone 1 37°F	Zone 2 42°F	Zone 3 47°F	Zone 4 52°F	Zone 5 57°F	Zone 6 62°F	Zone 7 67°F	Zone 8 72°F	Zone 9 77°F
RECTGH-S(R) 11i	4.7	5.1	5.4	5.9	6.3	6.8	7.4	8.2	9.2
RECTGH-S(R) 10i	4.3	4.6	4.9	5.3	5.6	6.1	6.7	7.4	8.3
RECTGH-S(R) 84i	3.7	4.0	4.2	4.6	4.9	5.3	5.8	6.4	7.2

Venting

SINGLE UNIT: MAX. EQUIVALENT VENT LENGTHS - STRAIGHT PIPE		
Number of 90° Elbows	Max Length 2" straight pipe	Max. length 3" straight pipe
0	70 ft. (21.3 m)	150 ft. (45.7 m)
1	64 ft. (19.5 m)	145 ft. (44.2 m)
2	58 ft. (17.7 m)	140 ft. (42.7 m)
3	52 ft. (15.8 m)	135 ft. (41.1 m)
4	46 ft. (14.0 m)	130 ft. (39.6 m)
5	40 ft. (12.2 m)	125 ft. (38.1 m)
6	34 ft. (10.4 m)	120 ft. (36.6 m)

Equivalent Ft. of Elbows		
	2" Pipe	3" Pipe
90° Elbow	6 ft (1.83 m)	5 ft (1.52 m)
45° Elbow	3 ft. (0.9 m)	2.5 ft. (0.75 m)


Venting Materials Allowed: Schedule 40 PVC, CPVC, Polypropylene

Min. Vent Length Straight Pipe	
Number of 90° Elbows	Min. Length 2" 3" pipe
1	1.0 ft (0.3 m)


COMMON VENTING	
# of Water Heaters	3" Common Vent
2	60 ft.

SINGLE UNIT: Max. Flex Venting	
Max Length 2" flex vent	
50 ft.	


Dimensions

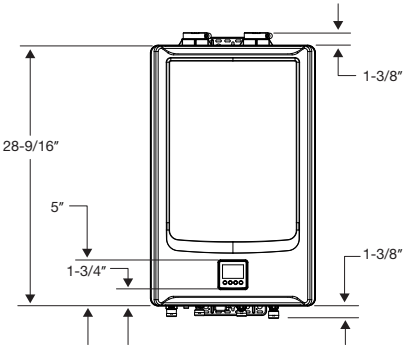

TOP VIEW



BOTTOM VIEW

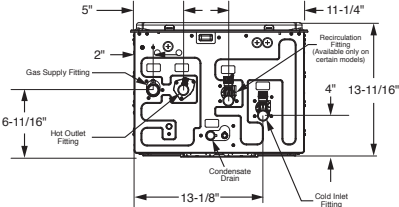

INCLUDED IN THE BOX:

- ☒ Tankless water heater with built-in recirculation pump (SR-Series only)
- ☒ Brass service valves
- ☒ Crossover valve (SR-Series only)
- ☒ Pressure relief valve
- ☒ 5' 120V 3-prong power cord
- ☒ Mounting & spare parts kit
- ☒ Vent screens
- ☒ Use & care manual

ALSO NEEDED FOR INSTALLATION:

- ☐ Schedule 40 PVC venting in 2" or 3" (sold separately)
- ☐ 120V outlet near installation location*
- ☐ Water and gas lines near installation location*
- ☐ Condensate Wastewater Neutralizer (sold separately)*

*Check local code requirements

OPTIONAL ACCESSORIES:

- ☐ On-Demand Recirculation kit & Manual Wall Switch
- ☐ Venting kits
- ☐ Outdoor conversion kit

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.