Oatey®

4700 W. 160th St.
Cleveland, OH 44135
PH:800-321-9532
FX:800-321-9535
www.oatey.com

TECHNICAL SPECIFICATION

THERMOPLASTIC BASE NO-CALK® ROOF FLASHINGS

ISO 9001 Quality System

Engineering Specification: Oatey Thermoplastic No-Calk® Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required.	**Job Reference**
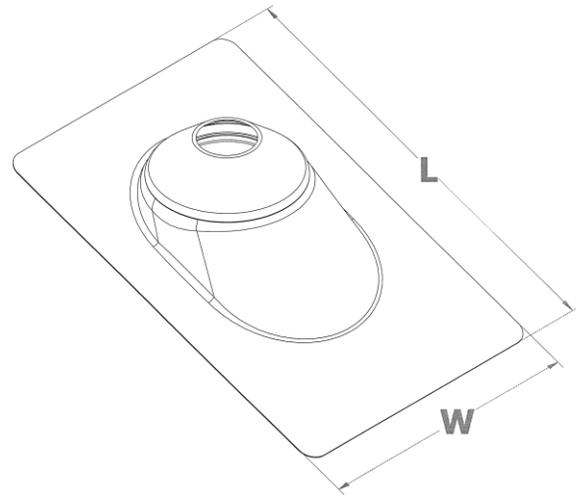
(All dimensions in inches)

♦ Roof Flashing slides over vent pipe for pitch to 45°
♦ Non-fading, non-cracking rigid black thermoplastic base
♦ Non-fading sealing collar
♦ Approved for Type B installations
♦ Not for hot-mopped or built-up roofs
♦ Do not use paint or petroleum based products on plastic bases or rubber collars

✔	Product No.	Description	Length (L)	Width (W)	PACK	CARTON WEIGHT
	11898	1-¼"-1-½" Thermoplastic No-Calk Roof Flashing	13	9-¼	6	3 lbs.
	11908	1-¼"-1-½" Thermoplastic No-Calk Roof Flashing	13	9-¼	12	6 lbs.
	11899	2" Thermoplastic No-Calk Roof Flashing	13	9-¼	6	3 lbs.
	11909	2" Thermoplastic No-Calk Roof Flashing	13	9-¼	12	6 lbs.
	11890	3" Thermoplastic No-Calk Roof Flashing	15	11-¼	6	4 lbs.
	11910	3" Thermoplastic No-Calk Roof Flashing	15	11-¼	12	8 lbs.
	11891	4" Thermoplastic No-Calk Roof Flashing	16	12	6	5 lbs.
	11884	1 ¼" – 1 ½" Thermoplastic 12" x 18" base	18	12	12	
	11911	4" Thermoplastic No-Calk Roof Flashing	16	12	12	9 lbs.
	11917	1-¼"-1-½" Thermoplastic No-Calk Roof Flashing – SW Texas	15	11-¼	12	9 lbs.
	11918	2" Thermoplastic No-Calk Roof Flashing – SW Texas	15	11-¼	12	9 lbs.
	11884	1.25 " – 1.5" Thermoplastic No-Calk	12	18	12	9 lbs.
	11887	1-¼"-1-½" Large Base Thermoplastic No-Calk Roof Flashing	18	18	12	9 lbs.
	11888	2" Large Base Thermoplastic No-Calk Roof Flashing	18	18	12	10 lbs.
	11889	3" Large Base Thermoplastic No-Calk Roof Flashing	18	18	12	10 lbs.

UPC® IAPMO Listed   NES 653

Data is subject to manufacturing tolerances.