

Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
REPRESENTATIVE: _____	TYPE OF SERVICE:	DATE: _____
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:




COMFORT 10-16 T BU/LC


COMFORT is an efficient circulator designed for hot-water recirculation in domestic buildings with a dedicated return line. It features a built-in temperature sensor and control modes to limit heat losses.

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
Liquid: Water	Liquid temperature range: 34.9 .. 179.6 °F	Max. power input: 6 W
Temperature: 140 °F	Pipe connection: 1 1/4" NPSM	Mains frequency: 60 Hz
Specific Gravity: 0.985	Product number: 92957794	Enclosure class: IP44
		Thermal protection: ELEC

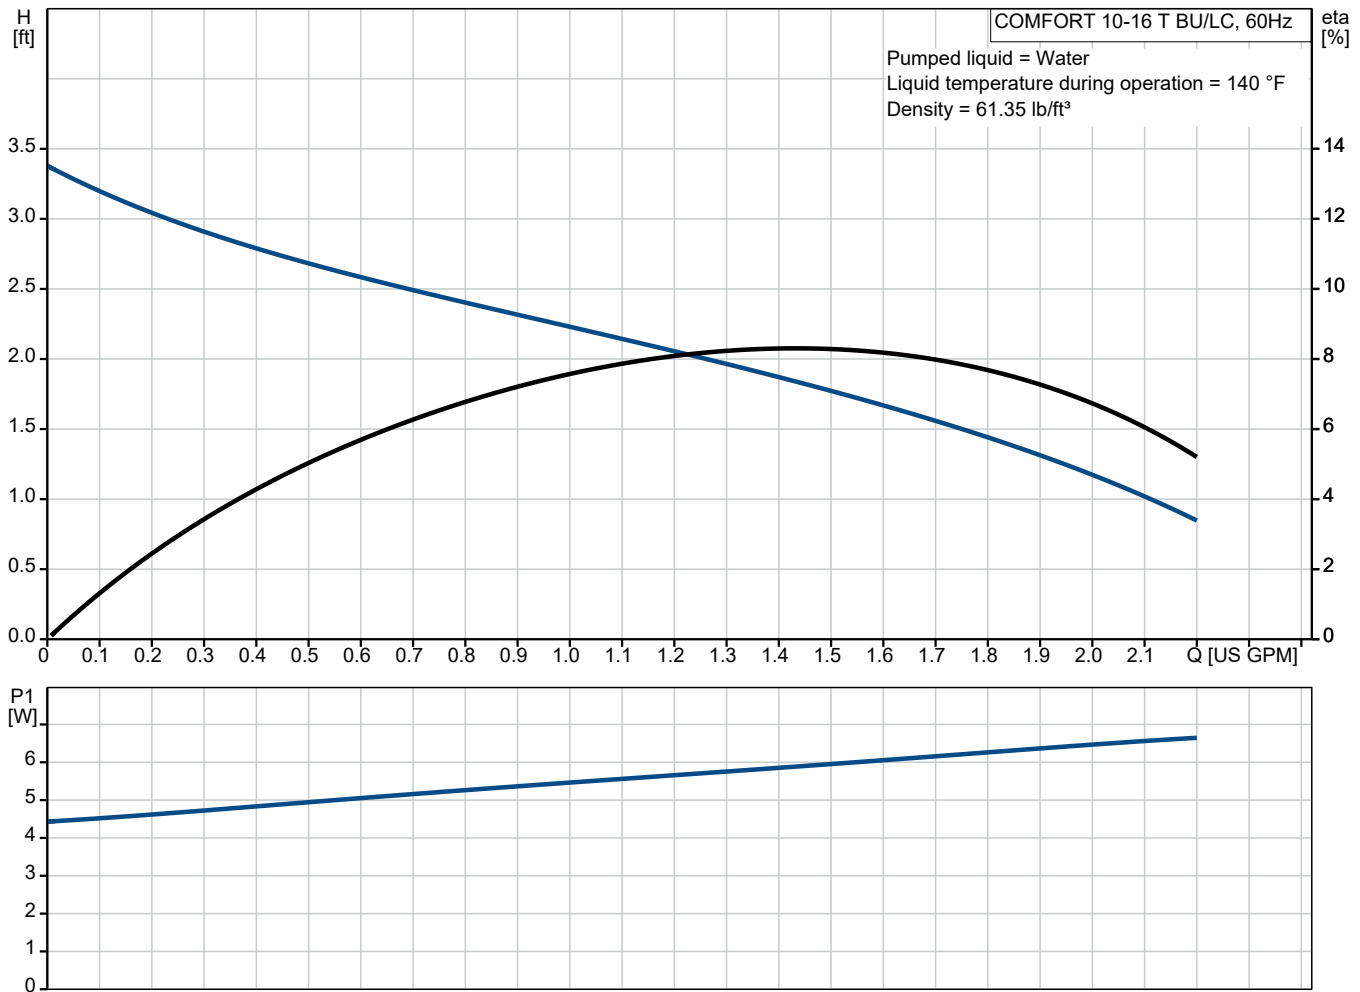

Submittal Data

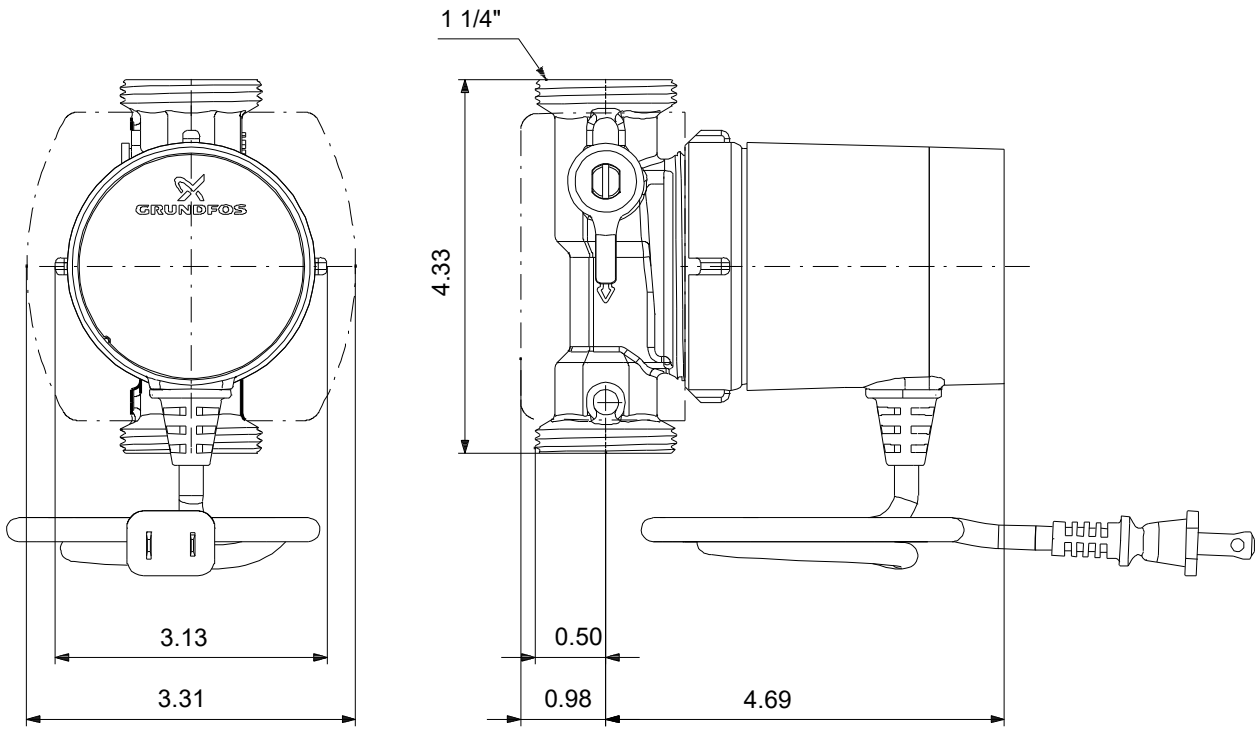

Materials:
Pump housing: Brass
Pump housing: ASTM C28500
Impeller: Composite