



6792TRM
Tub/Shower Trim
Specification Submittal

Location:

Model Numbers

- 6792TRM**
Tub/Shower Trim
- Valve Options:**
-262 Series Temptrol Shower Valve with TRM modifier
-162 Series Temptrol Shower Valve requires TC modifier

Options/Modifications

- 15** **CG** 1.5 gpm (5.7 L/min) flow restrictor
- L1** Less showerhead
- L4** Less head, arm and flange
- L7** Less handle
- TC** Test Cap Trim (includes TA-10&-12A) *used with series 162 Series Temptrol Shower Valve*
- STN** Satin Nickel finish
- MB** Matte Black finish
- BBZ** Brushed Bronze finish

Feature Highlights

- Identity Tub/Shower Trim.
- Requires Temptrol® Pressure Balancing Shower Valve.
- Metal lever handle.
- 5-1/2" diverter tub spout.
- Single mode showerhead.
- 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetallic construction, plated in standard polished chrome finish.

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation.



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
6792	STN		15	TRM		6792STN15TRM
6792	MB	L2		TRM	TC	6792MBL2TRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/ Engineering Specification

Symmons Identity Tub and Shower Trim _____ with Identity Tub and Shower Trim powered by Temptrol® Pressure Balancing Shower Valve. Features metal lever handle, 5-1/2" diverter tub spout, single mode showerhead, and 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) complaint. Lever handle meets ADA requirements for operation. Available options include: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L4 - Less head, arm and flange", "L7 - Less handle", "TC - Test Cap Trim", "STN - Satin nickel finish", "MB - Matte Black finish", and "BBZ - Brushed Bronze finish".

Dimensions

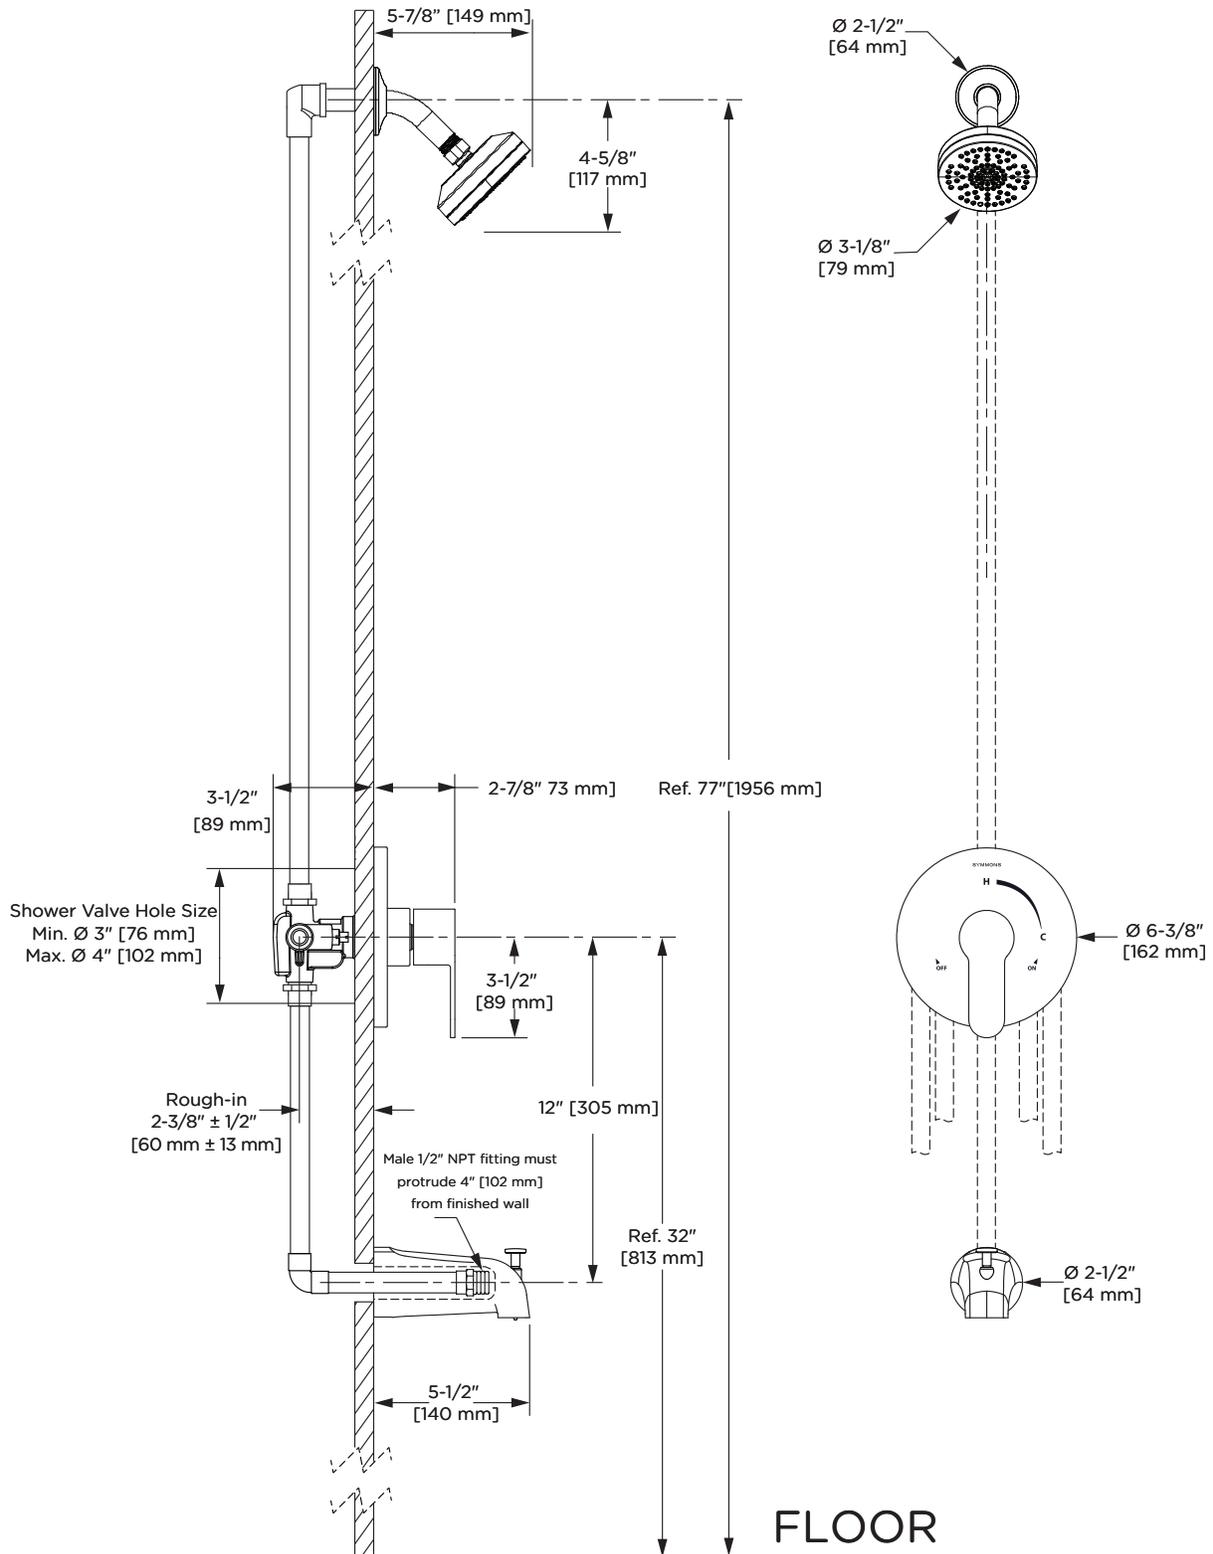

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.