

S6794TRM
Tub/Hand Shower Trim
Specification Submittal

Location:

Model Numbers

- S6794TRM**
Tub/Hand Shower Trim

Valve Options:

- S262 Series Temptrol Shower Valve with TRM modifier
- S162 Series Temptrol Shower Valve requires TC modifier

Feature Highlights

- Identity Tub/Hand Shower Trim.
- Requires Temptrol® Pressure Balancing Shower Valve.
- Integral diverter control.
- Metal lever handle.
- 5-1/4" tub spout.
- Cradle for hand shower wand.
- 60" flexible metal hose.
- Single mode hand shower with NPSO
- Dual checks for backflow protection.
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetal construction, plated in standard polished chrome finish.

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min)
2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation.



Options/Modifications

- 15** **Ct** 1.5 gpm (5.7 L/min) flow restrictor
- L2** Less hand shower wand
- L5** Less hand shower system (cradle, hose, and and elbow)
- L6** Less tub spout
- L7** Less handle
- TC** Test Cap Trim (includes TA-10&T-12A) used with S162 series Temptrol Shower Valve
- STN** Satin Nickel finish
- MB** Matte Black finish
- BBZ** Brushed Bronze finish

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
S6794	STN		15	TRM		S6794STN15TRM
S6794	MB	L2		TRM	TC	S6794MBL2TRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/ Engineering Specification

Symmons Identity Tub and Hand Shower Trim _____ Includes Identity Tub and Hand Shower Trim powered by Temptrol® Pressure Balancing Shower Valve. Features integral diverter control, metal level handle, 5-1/4" tub spout, cradle for hand shower wand, 60" flexible metal hose, single mode hand shower with NPSO, dual checks for backflow protection, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) complaint. Lever Handle meets ADA requirements. Available options include: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L2 - Less hand shower wand", "L5 - Less hand shower system", "L7 - Less handle", "TC - Test Cap Trim", "STN - Satin Nickel finish", "MB - Matte Black finish", and "BBZ - Brushed Bronze finish".

Dimensions

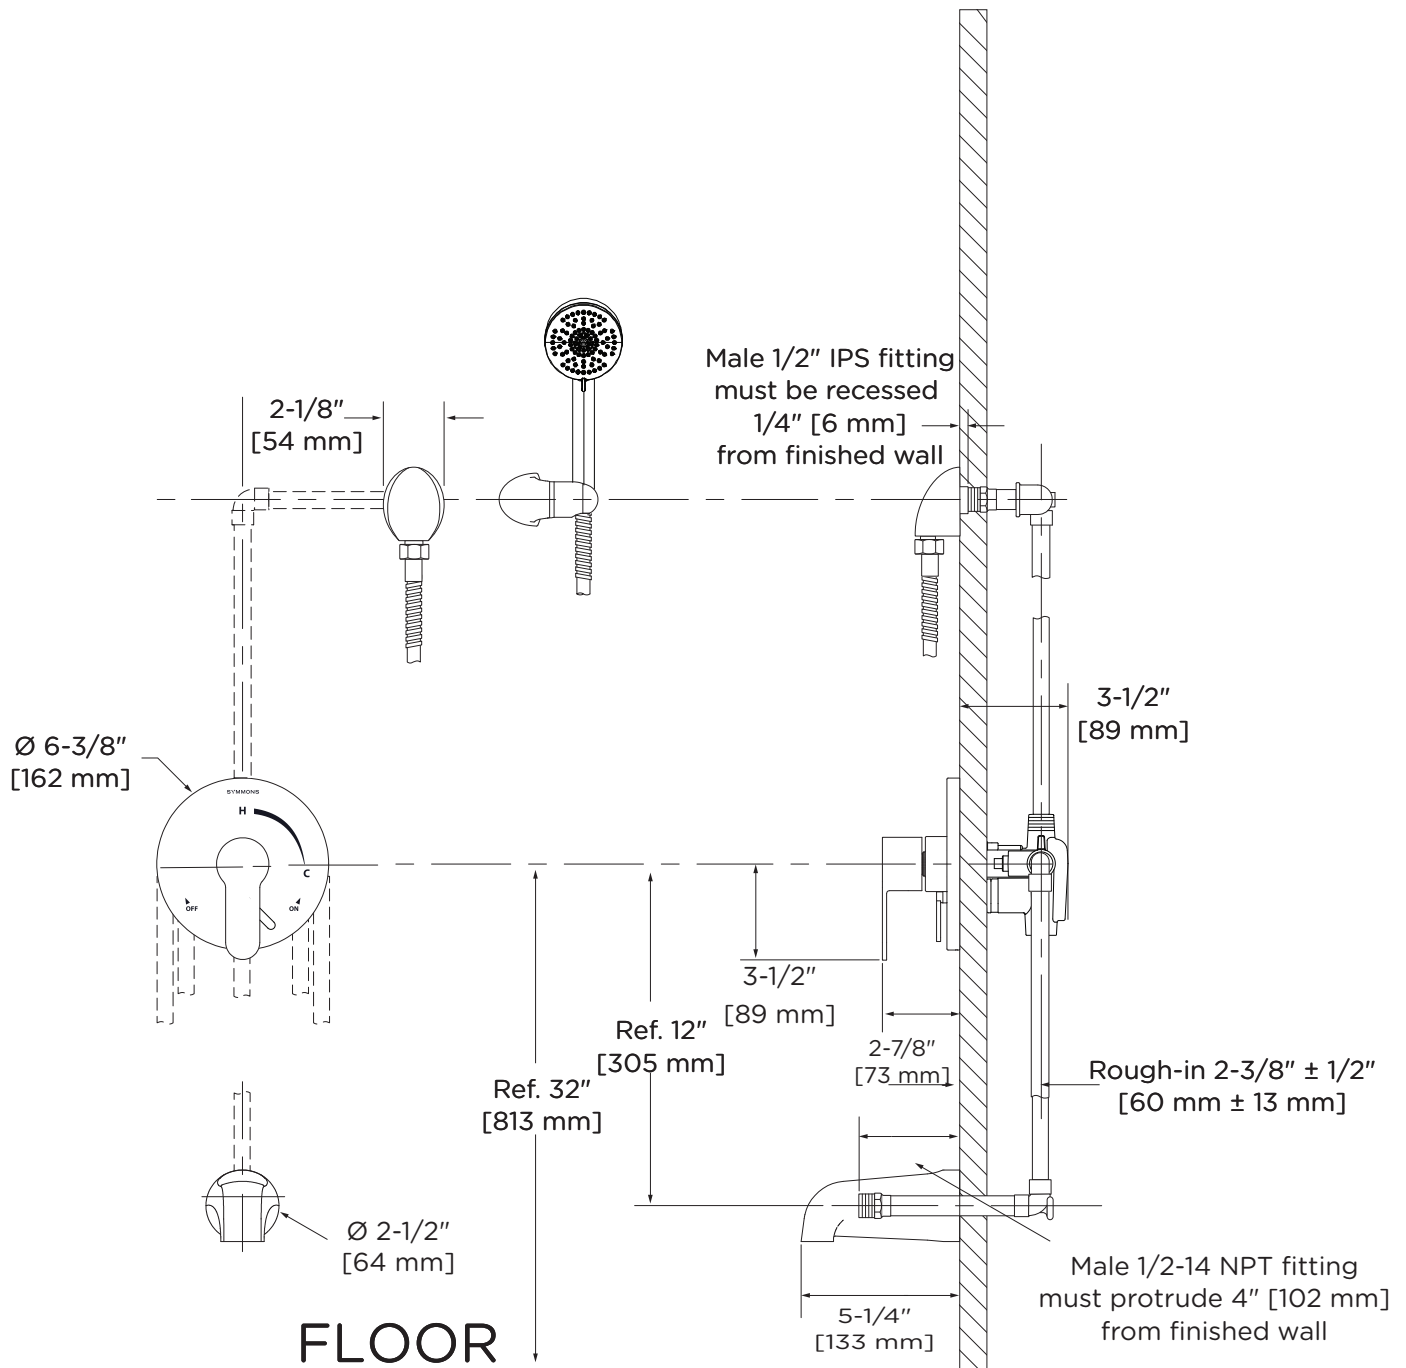

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.