

# 24" three-function handshower kit, 1.75 gpm K-35950-G

# Features

- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Thumb tab allows for a smooth transition between sprays
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) maximum handshower flow rate at 80 psi (5.5 bar)
- 24" (609 mm) slidebar features adjustable mounting brackets for installation flexibility
- Box includes: Handshower, 24" slidebar with mounting brackets, 60" (1524 mm) metal hose
- Coordinates with other products in the Bellera collection
- This product can help a building earn Water Efficiency points in LEED<sup>®</sup> Green Building Rating System

# Material

KOHLER<sup>®</sup> finishes resist corrosion and tarnishing

### **Included Components**

K-35949-G Three-function handshower, 1.75 gpm K-98341BR Slidebar, 610mm





## **Codes/Standards**

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) IAPMO Certification

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

### **Color Code Description**





- CP Polished Chrome
- BN Vibrant® Brushed Nickel
- BL Matte Black



# KOHLER, Faucets

24" three-function handshower kit, 1.75 gpm K-35950-G

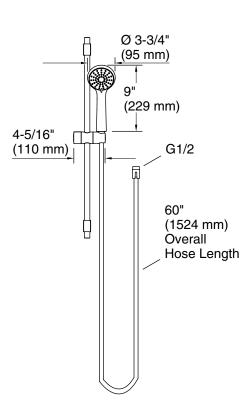

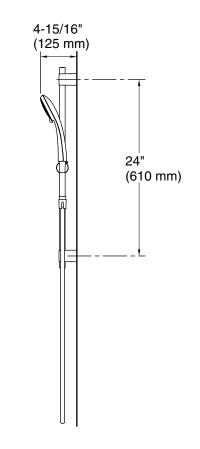

# **Technical Information**

All product dimensions are nominal.

Drain included:

## Handshower:

Rated maximum 1.75 gal/min (6.6 l/min) flow:

No

# Notes

For use with automatic compensating valves rated at 1.05 gal/min (4 l/min) or less. Install this product according to the installation guide.

