


Premium 6" Wall Vent

Technical Product Specifications

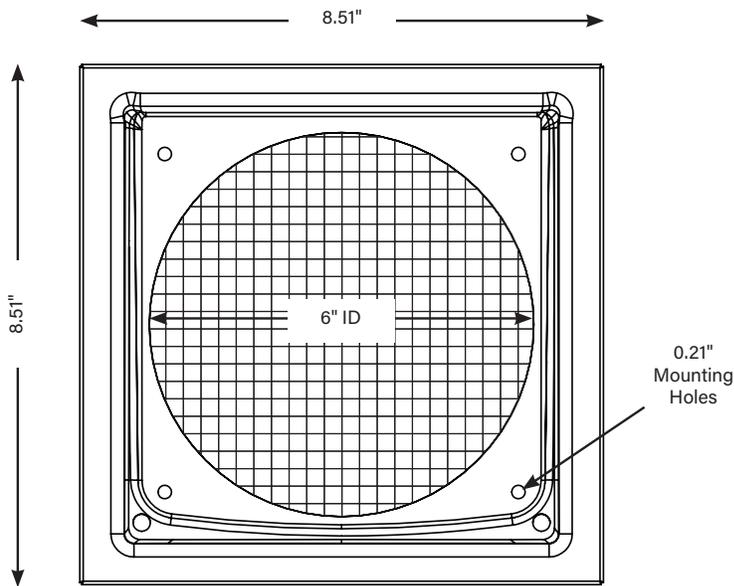

Model Number	Color
6WVW	White
6WVT	Tan
6WVB	Brown
6WVK	Black

Performance Data

Product Use:

Venting exhaust systems through exterior walls for applications such as kitchen & bath systems.
 Note: If used for dryer venting, the screen must be removed to meet standard code requirements.

Materials:

- 26 Gauge Galvalume® Steel Housing
- 30 Gauge Galvalume® Steel Damper
- Polyester TGIC Powder Coating
- Removable Galvanized Wire Screen
- Galvanized Wire Screen opening 0.25"

General Information

Benefits:

- Improves Aesthetics with Flush Installation
- Installs Easily in New and Existing Construction
- Stands the Test of Time with Durable Materials
- Simplifies Duct Cleaning with Easy Accessibility
- Maximizes Airflow Efficiency
- Maintains consistent look when used in concert With the Dryer Wall Vent.

Features:

- Deep Drawn Manufacturing Process
- Galvalume® & Powder Coated Steel Construction
- Lightweight Damper and Heavier Frame
- Recessed Gravity Damper & Integrated Magnets
- Integrated Secondary Back Plate with Wider Mounting Holes
- Built-in Drip Edge
- Damper Opens Freely to 110°
- Low Strength Closure Magnets
- Rubber Bumpers Support Quiet Closing Damper
- Eight Built-in Mounting Holes
- Stocked in 4 Colors: White, Tan, Brown and Black

Manufactured By

InOvate®


250 S. Central Blvd. Suite 207
 Jupiter, FL 33458
 Phone: (888) 443-7937
 Fax: (561) 745-9723
<https://premiumwallvent.com>



Made in the USA

Collar

No-Collar

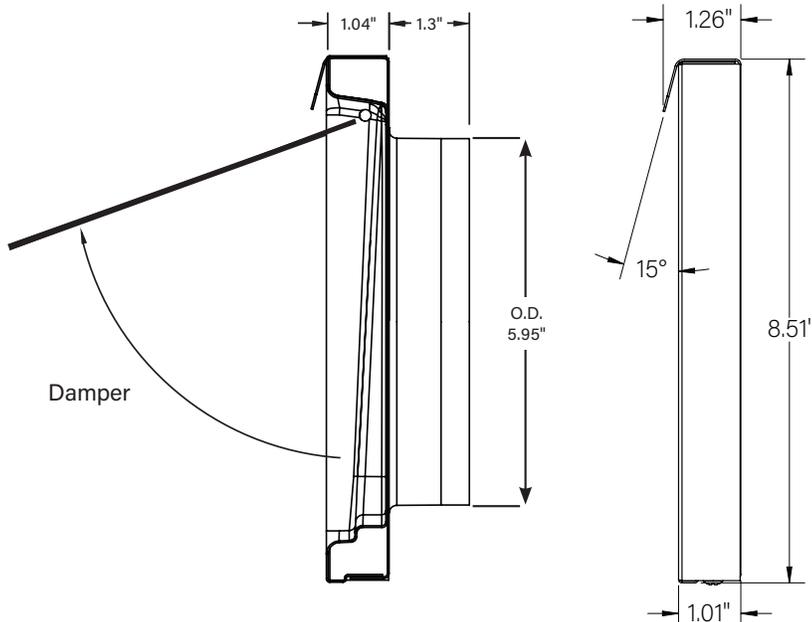

Made in the USA