



60,000 BTU/H WALL MULTI-ZONE HEAT PUMP SYSTEM

SUBMITTAL COVER SHEET

PROJECT NAME _____
LOCATION _____
ARCHITECT _____
ENGINEER _____
CONTRACTOR _____
REFERENCE _____
SUBMITTED BY _____ DATE _____

Multi-Zone Outdoor Unit (ODU):
DRA6U60M2A



PRODUCT FEATURES

- Low ambient heating down to -13°F
- Low ambient cooling down to -13°F
- Variable speed inverter compressor
- Quiet operation
- Included base pan heater
- Auto restart
- Anti-corrosive coil coating
- A2L refrigerant detection system
- Electronic refrigerant shut-off valve
- Port adaptors included

EFFICIENCY DATA	DUCTLESS	MIXED	DUCTED
SEER2	19.20	18.60	18.00
EER2	10.00	10.00	10.00
HSPF2	9.60	9.40	9.20
COP at 47°F (8°C) ²	3.50	3.60	3.70
COP at 17°F (-8°C) ³	2.70	2.65	2.60
COP at 5°F (-15°C) ⁴	2.00	2.05	2.10

SYSTEM DATA

Refrigerant Type	R-454B
Refrigerant Charge (oz. (kg))	151.7 (4.3)
Design Pressure (PSIG)	550/340
Indoor/ Outdoor Coil Coating	Golden Fin Coating

CAPACITIES		DUCTLESS	MIXED	DUCTED
Cooling (BTU/hr)	Rated at 95°F (35°C) ¹	60000	60000	60000
	at 109°F (43°C)	45000	45500	46000
	at 5°F (-15°C)	60000	59000	58000
	Minimum	19000	19000	19000
	Maximum	62000	61500	61000
Heating (BTU/hr)	Rated at 47°F (8°C) ²	60000	60000	60000
	Rated at 17°F (-8°C) ³	39000	39000	39000
	Rated at 5°F (-15°C) ⁴	36000	38000	40000
	at -13°F (-25°C)	27000	25500	24000
	Minimum	20000	20000	20000
	Maximum	60000	60500	61000
Nominal ODU Capacity ⁵		60000		



Specifications are subject to change without notice.
© 2024 Ferguson Enterprises LLC
www.durastar.com



60,000 BTU/H WALL MULTI-ZONE HEAT PUMP SYSTEM

SPECIFICATIONS - DRA6U60M2A

LINE SET REQUIREMENTS	
Connection Type	Flare
Liquid (in. (mm))	6 x Ø1/4 (Ø6.35)
Gas (in. (mm))	4 x Ø3/8 (Ø9.52) 2 x Ø1/2 (Ø12.7)
Refrigeration Adaptors Included (in)	2 x 1/4 → 3/8 1 x 3/8 → 1/2 2 x 1/2 → 3/8 2 x 1/2 → 5/8
Minimum Indoor Units Connected	2
Pre-Charge Length (ft. (m))	25 (7.5)
Maximum Length (combined IDUs) (ft. (m))	262 (80)
Maximum Length (per IDU) (ft. (m))	115 (35)
Minimum Length (per IDU) (ft. (m))	10 (3)
Max. Height Differential between IDU and ODU (ft. (m))	49 (15)
Max. Height Differential between IDUs (ft. (m))	33 (10)
Additional Refrigerant for Ø1/4" (Ø6.35) Liquid Pipe (oz./ft (g/m))	.16 (15)
Additional Refrigerant for Ø3/8" (Ø9.52) Liquid Pipe (oz./ft (g/m))	.32 (30)

ELECTRICAL DATA	DUCTLESS	DUCTED
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Recommended Breaker (Amps)	45	
Minimum Circuit Ampacity (Amps)	40.0	
Communication Wire Size	14*4 AWG Stranded	
Rated Current - Cooling (Amps) ¹	26.2	27.0
Rated Current - Heating (Amps) ²	22.0	21.3

¹ Value at AHR1 Rated Capacity at 95°F (35°C) (AFull)

² Value at AHR1 Rated Capacity at 47°F (8°C) (H1Full)

³ Value at AHR1 Rated Capacity at 17°F (-8°C) (H32)

⁴ Value at AHR1 Rated Capacity at 5°F (-15°C) (H42)

⁵ If the total indoor unit load exceeds the nominal capacity of the outdoor unit, the practical output capacity of each indoor unit will be correspondingly reduced. This situation is very evident during heating mode.

OUTDOOR UNIT DATA		
Unit Dimensions (in. (mm))	Width	37-1/2 (952)
	Depth	16-5/16 (415)
	Height	52-1/2 (1333)
Carton Dimensions (in. (mm))	Width	43-1/8 (1095)
	Depth	19-1/2 (495)
	Height	58-1/4 (1480)
Net Weight (lbs. (kg))	237.8 (107.9)	
Gross Weight (lbs. (kg))	270.3 (122.6)	
Cooling Operating Temp. (°F (°C))	-13 - 122 (-25 - 50)	
Heating Operating Temp. (°F (°C))	-13 - 75 (-25 - 24)	
Airflow (CFM)	1400	
Sound Pressure (dB(A))	65	
Fan Speed (r/min)	Low	650
	Med	700
	High	800
Fan Motor Current Type	DC	

COMPRESSOR	
Type	DC Inverter Rotary
Oil Type	VG74
Oil Charge (oz.(ml))	47 (1400)

Specifications are subject to change without notice.

© 2024 Ferguson Enterprises LLC


www.durastar.com




60,000 BTU/H WALL MULTI-ZONE HEAT PUMP SYSTEM

ODU DIMENSIONS - DRA6U60M2A

Clearances

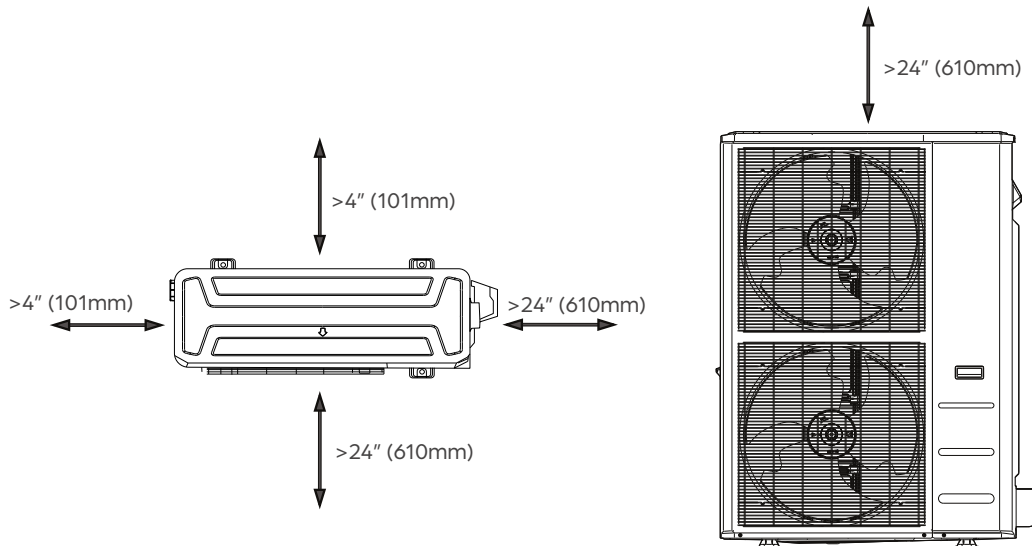

Dimensions

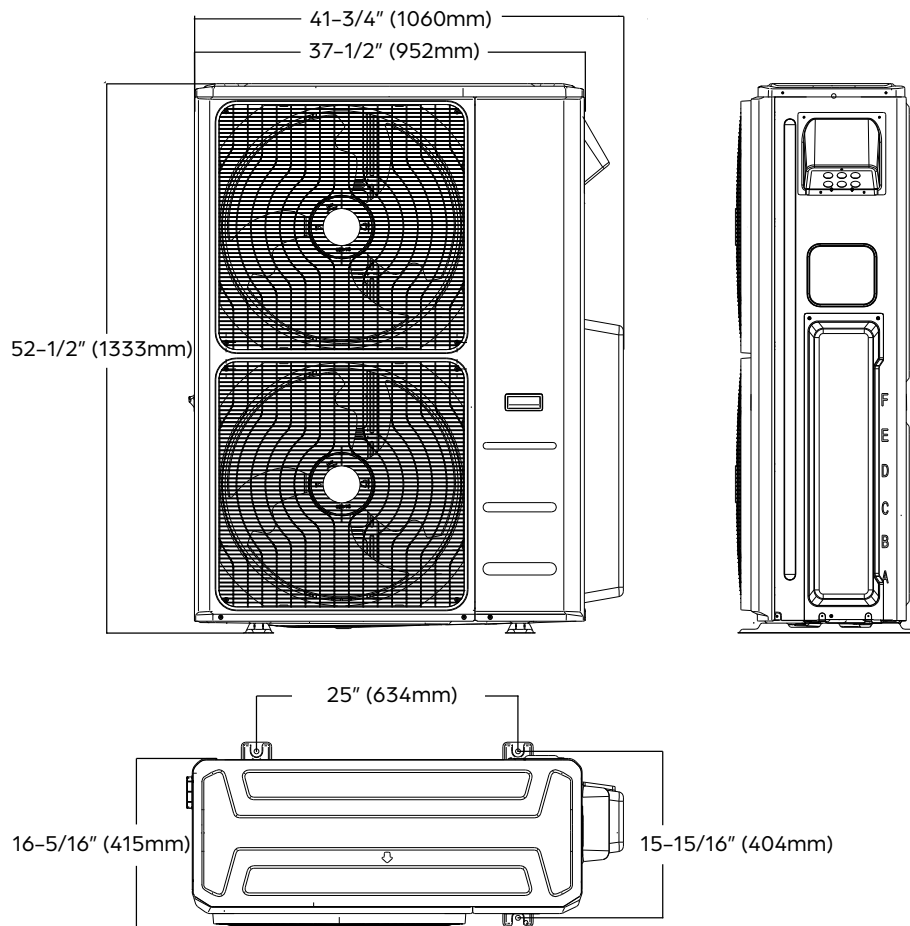

Specifications are subject to change without notice.

© 2024 Ferguson Enterprises LLC

www.durastar.com