
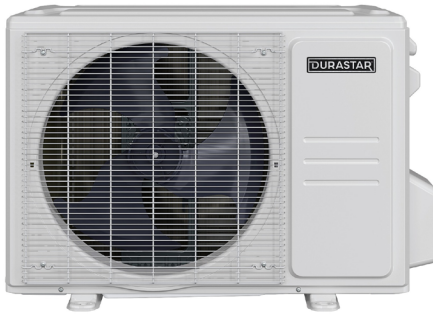





12,000 BTU/H WALL MOUNTED HEAT PUMP SYSTEM

SUBMITTAL COVER SHEET

PROJECT NAME _____
LOCATION _____
ARCHITECT _____
ENGINEER _____
CONTRACTOR _____
REFERENCE _____
SUBMITTED BY _____ DATE _____

Indoor Unit (IDU): DRAW12F2A	Outdoor Unit (ODU): DRA1U12S2A	Wireless Remote Control
		

PRODUCT FEATURES

- Low ambient heating down to -13°F
- Low ambient cooling down to -13°F
- A2L refrigerant detection system
- Variable speed inverter compressor
- Quiet operation
- Wireless remote control with "Follow Me" technology
- Turbo, ECO, Active Clean, Sleep modes and more
- Auto restart
- 46°F freeze protection
- Included base pan heater
- Anti-corrosive fin coating
- Compatible with DRSTAT101 wired thermostat

CAPACITIES		
Cooling Capacity (BTU/hr)	Rated at 95°F (35°C) ¹	12000
	at 109° (43°C)	7900
	at 5° (-15°C)	12700
	Cooling Range	2600~13700
Heating Capacity (BTU/hr)	Rated at 47°F (8°C) ²	12000
	Rated at 17°F (-8°C) ³	9600
	Rated at 5°F ⁴	8600
	at -13° (-25°C)	5300
	Heating Range	4100~14400

SYSTEM DATA	
Refrigerant Type	R-454B
Refrigerant Charge (oz. (kg))	32.5 (.9)
Design Pressure (PSIG)	550/340
Indoor/ Outdoor Coil Coating	Golden Fin Coating

EFFICIENCY DATA	
SEER2	23.1
EER2	12.2
HSPF2	11.5
COP at 47°F (8°C) ²	3.69
COP at 17°F (-8°C) ³	2.84
COP at 5°F (-15°C) ⁴	2.35



Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC

www.durastar.com

Intertek



12,000 BTU/H WALL MOUNTED HEAT PUMP SYSTEM

SPECIFICATIONS

LINE SET REQUIREMENTS	
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø3/8 (Ø9.52)
Pre-Charge Length (ft. (m))	25 (7.5)
Minimum Length (ft. (m))	10 (3.0)
Maximum Length (ft. (m))	82 (25.0)
Maximum Height Differential (ft. (m))	49 (15.0)
Additional Refrigerant (oz./ft (g/m))	0.16 (15)

OUTDOOR UNIT		
Unit Dimensions (in. (mm))	Width	30-1/8 (765)
	Depth	11-15/16 (303)
	Height	21-7/8 (555)
Carton Dimensions (in. (mm))	Width	34-15/16 (887)
	Depth	13-5/16 (337)
	Height	24 (610)
Net Weight (lbs. (kg))	62.2 (28.2)	
Gross Weight (lbs. (kg))	67.7 (30.7)	
Cooling Operating Temp. (°F (°C))	-13 - 122 (-25 - 50)	
Heating Operating Temp. (°F (°C))	-13 - 75 (-25 - 24)	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Recommended Breaker (Amps)	15	
Minimum Circuit Ampacity (Amps)	12	
Communication Wire Size	14*4 AWG Stranded	
Rated Current - Cooling (Amps) ¹	4.5	
Rated Current - Heating (Amps) ²	4.3	
Sound Pressure (dB(A))	54	

INDOOR UNIT		
Unit Dimensions (in. (mm))	Width	31-9/16 (802)
	Depth	7-7/8 (200)
	Height	11-5/8 (295)
Carton Dimensions (in. (mm))	Width	34-1/2 (875)
	Depth	11-1/4 (285)
	Height	15 (380)
Net Weight (lbs. (kg))	19.0 (8.6)	
Gross Weight (lbs. (kg))	24.3 (11.0)	
Indoor Unit Air Flow (CFM (m³/h))	Low	153 (260)
	Medium	194 (330)
	High	294 (500)
	Turbo	383 (650)
Moisture Removal (Pints/day (L/h))	66 (1.3)	
Drain Port O.D. (in. (mm))	Ø5/8 (Ø16)	
Recommended Breaker (Amps)	15	
Minimum Circuit Ampacity (Amps)	3.0	
Sound Pressure (dB(A))	Silent	19
	Low	20
	Medium	37
	High	43
	Turbo	46

COMPRESSOR	
Type	DC Rotary Inverter
Oil Type	Ester Oil VG74
Oil Charge (oz. (ml))	10.5 (310)

¹ Value at AHR1 Rated Capacity at 95°F (35°C) (AFull)

² Value at AHR1 Rated Capacity at 47°F (8°C) (H1Full)

³ Value at AHR1 Rated Capacity at 17°F (-8°C) (H32)


⁴ Value at AHR1 Rated Capacity at 5°F (-15°C) (H42)




12,000 BTU/H WALL MOUNTED HEAT PUMP SYSTEM

IDU DIMENSIONS – DRAW12F2A

Unit Dimensions

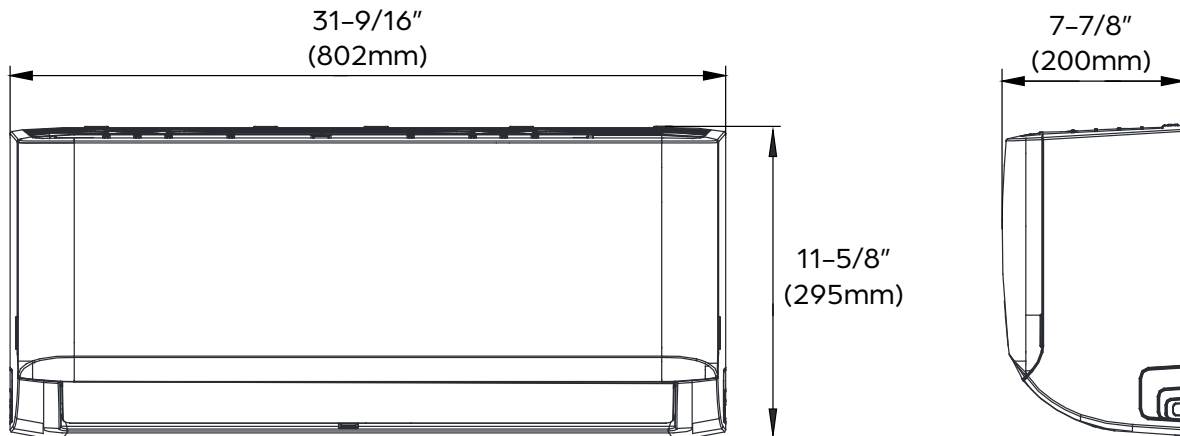


Mounting Plate Dimensions

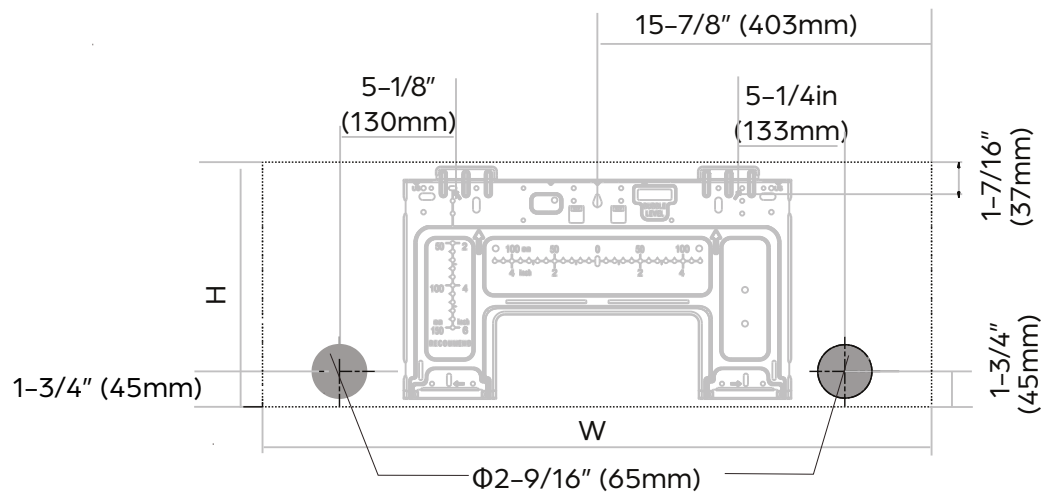

Indoor unit dimensions (WxH):

31-9/16" (802mm) x 11-5/8" (295mm)

Clearance Distances

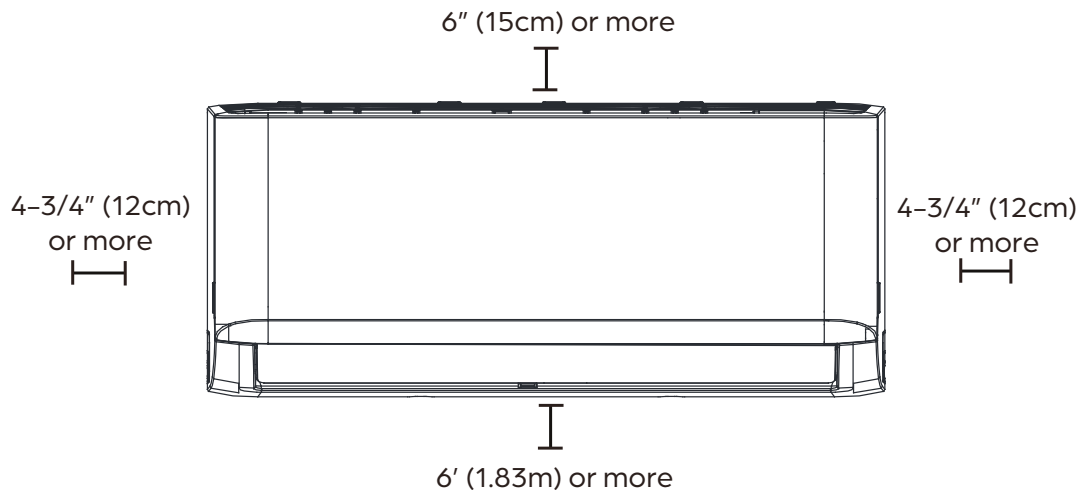





12,000 BTU/H WALL MOUNTED HEAT PUMP SYSTEM

ODU DIMENSIONS – DRA1U12S2A

Clearances

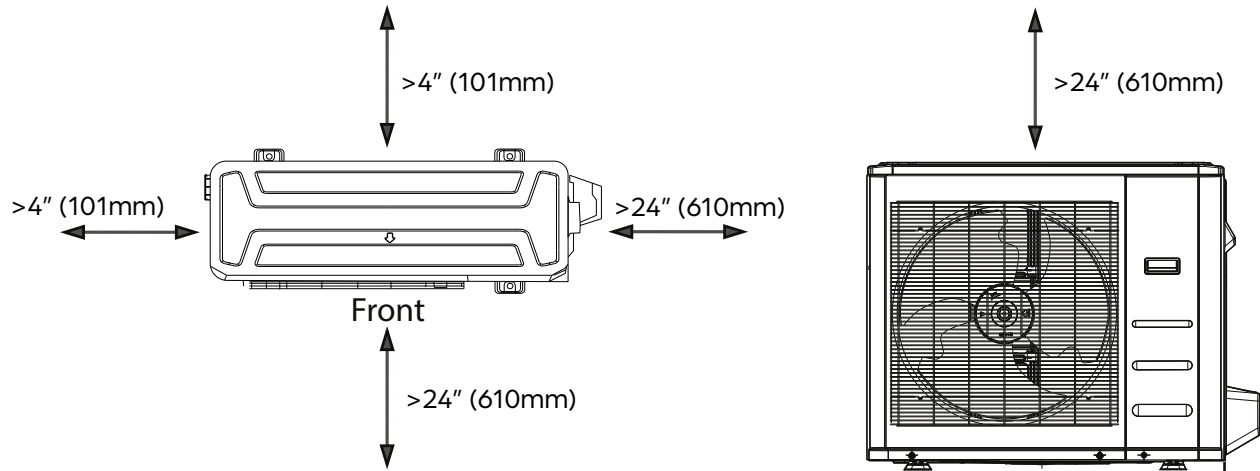

Dimensions

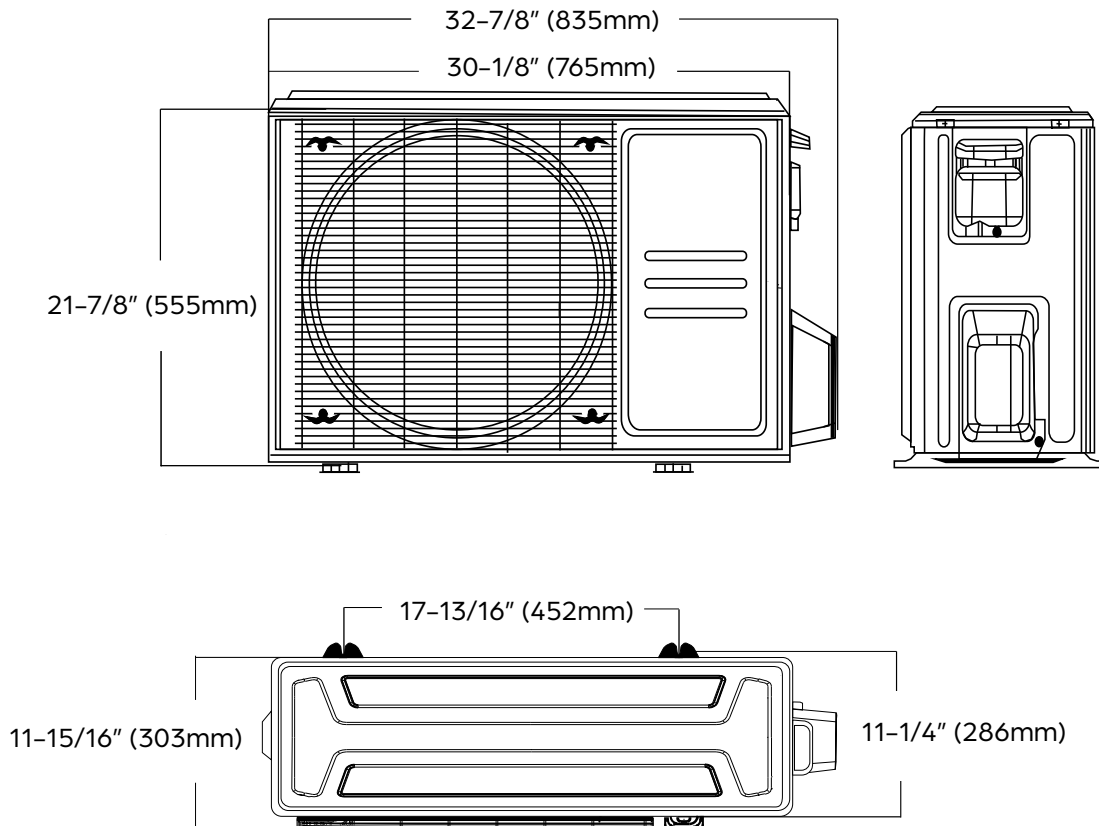

NOTE

Illustrations in this document are for explanatory purposes. The actual shape of your mini-split equipment may vary slightly.