WAC LIGHTING

Remote Power Supply

60W/96W, 120-277VAC/24VDC

Fixture Type:

Catalog Number:

Project:

Location:

Model & Product	L x W x H
❍ PS-24DC-U60R-BT Remote Enclosed Power Supply 100-277VAC Input 24VDC Output 60 Watt	8.81IN x 2.06IN x 1.25IN
❍ PS-24DC-U96R-BT Remote Enclosed Power Supply 100-277VAC Input 24VDC Output 96 Watt	8.81IN x 2.06IN x 1.25IN

Example: **PS-24DC-U60R-BT**

DESCRIPTION

This class 2 and class P, UL & cUL listed enclosed electronic power supply is the perfect solution for wiring multiple low voltage fixtures. Class 2 power supplys are intrinsicallysafer power supplys because they are compartmentalized to allow no greater than 5 amps of current to be drawn on each compartment. Enclosure cover is easy to remove. Power supply hasknockouts on three sides with clips for line voltage wiring. Secondary wiring for class 2 power supplys do not require conduit sheathed cable or clamp wiring techniques. This power supplyhas a low minimum load requirement of 6W to allow the use of LED products. May be dimmed using a TRIAC or electronic low voltage dimmer.

FEATURES

SPECIFICATIONS

Input:	100-277 VAC, 50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Rated Life:	50000 Hours
Finish:	BLACK
Operating Temp:	-4°F to 104°F (-20°C to 60°C)
Standards:	UL, cUL, Damp Location Listed




FINISHES:



BLACK

LINE DRAWING:

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. April 2023

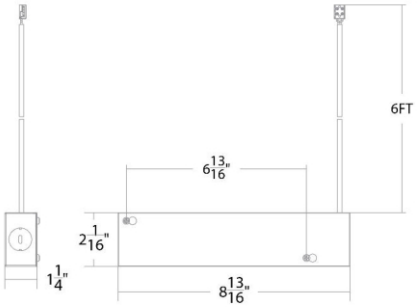

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. April 2023

WAC LIGHTING

Remote Power Supply

60W/96W, 120-277VAC/24VDC

Fixture Type:

Catalog Number:

Project:

Location:

ACCESSORIES

Model	*Description*	*Finish*

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. April 2023