

4-Way Cassette Heat Pump Ductless System

Indoor Model: 45MBCAQ12XA3



Turn to the experts

Job Data:

Tag #:

Date:




INDOOR STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Outside Air Intake
- Four fan speeds
- Sleep Mode
- Built-in condensate lift pump
- Follow Me (senses temperature at handheld remote)
- Auto-Restart function
- Quiet indoor operation
- Anti-corrosive fin coating
- Ceiling Grille

RESIDENTIAL APPLICATION LIMITED WARRANTY*

• Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

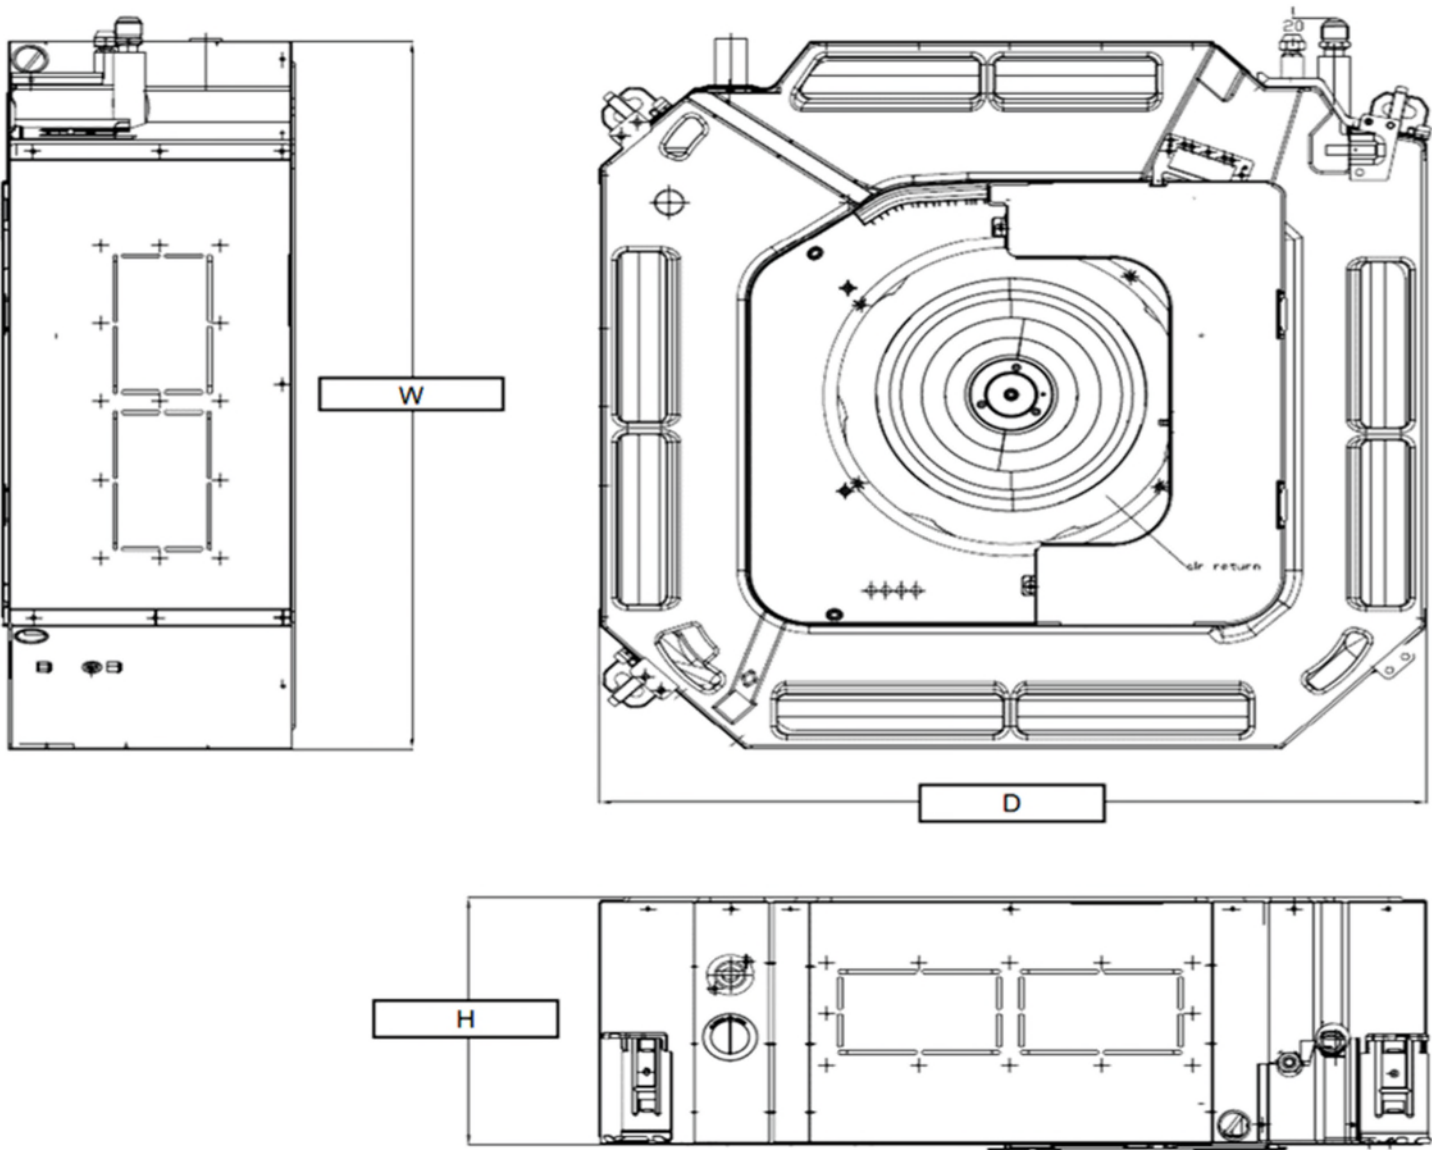

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
12K/18K	mm	570	570	245
	inch	22.44	22.44	9.65
24K	mm	830	830	205
	inch	32.68	32.68	8.07



45MBCAQ12XA3			
System	Indoor Model #		45MBCAQ12XA3
	Indoor Size		12000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
Operating Range	Cooling Indoor DB Min - Max	°F(°C)	60~90 (16~32)
	Heating Indoor DB Min - Max	°F(°C)	32~86 (0~30)
Indoor Coil	Face Area	Sq. Ft.	2.95
	No. Rows		2
	Fins per inch		20
	Circuits		4
Indoor Unit	Number of Fan Speeds		700/600/400
	Airflow (highest to lowest)	CFM	364.92/306.06/194.23
	Sound Pressure (highest to lowest)	dB(A)	43.5/40.5/27.5/26.0
	Moisture Removal	L/h	1.45
	Air Throw Data	ft(m)	9.84(3)
Dimensions	Body Height	in (mm)	9.65(245)
	Body Width	in (mm)	22.44(570)
	Body Depth	in (mm)	22.44(570)
	Body Net Weight	lbs (kg)	35.27(16)
	Panel Height	in (mm)	1.969(50)
	Panel Width	in (mm)	24.406(620)
	Panel Depth	in (mm)	24.406(620)
	Shipping Height	in (mm)	11.61(295)
	Shipping Width	in (mm)	28.15(715)
	Shipping Depth	in (mm)	25.20(640)
	Shipping Net Weight	lbs (kg)	41.89(19)
CONTROLS			
Standard	Wireless Remote Controller (°F/°C Convertible)		
Required	Cassette Panel	45MBCQ01XXX3	
Optional	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
	Wired Remote Control with Timer Function	KSACN1201AAA	
	Wi-Fi™ Kit High Wall	KSAIF0701AAA	
	24V Mini Interface	KSAIC0601230	

